



Hot Air Seam Sealing Machine (Water Proofing Machine for Shoes)

FEATURES:

- Adapt to press seam sealing tape on waterproof shoes.
- The lower pole is designed at some angle which is good for the operator line of sight and pressing the seam sealing tape easily.
- Depend on the technological requirement.
- The lower column is very initiative and passive.

Power Supply	220 V, 50/60 Hz	Motor	100 w
Power Consumption	2 KVA	Compressed Air	3 kg/cm ²
Roller Width	15/25/28/40/50 mm	Heating Power	1800 w, 800°C
Roller Speed	5-30 m/min	Dimension	1200 x 550 x 1500 mm
Roller Height	25~30 mm	Weight	165 kg

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com



GL-19A




Thread Burning Machine

USAGE: For burning threads and finishing shoes and leather products.

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per
le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-29B

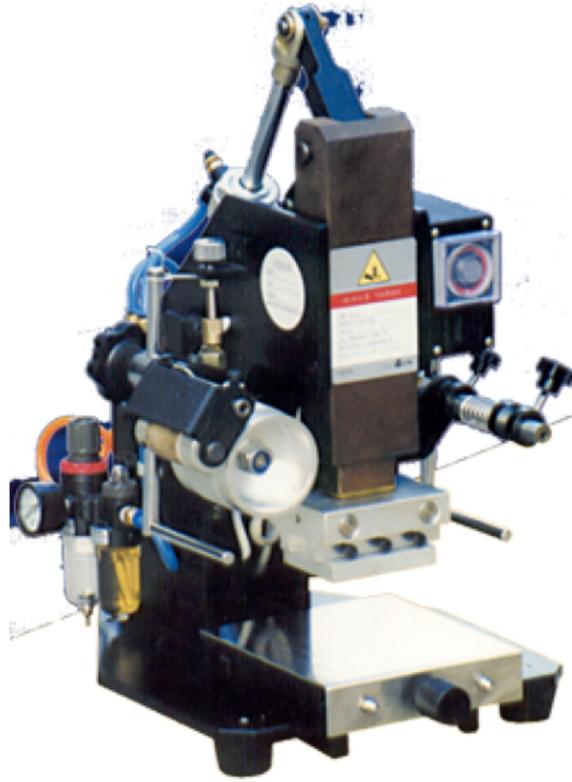

Embossing & Stamping Machine (Pneumatic)

USAGE: For embossing & stamping on shoe uppers & leather goods.

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per
le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com



GL-206A



PU Sole Trimming Machine (Flash Trimming)

USAGE: For sole edge trimming.

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per
le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com



GL-208A



Lining Trimming Machine

USAGE: For trimming edges of all types of lining.

SPECIFICATIONS:

Dimension (LxWxH)	1100 x 530 x 1165 mm
Net Weight	64 kg
Power	0.37 kw

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com



GL-295C



Toe-Part Cooling & Heating Forming Machine

FEATURES:

- Normal toe pre-moulding is moulded into stitch down shoes.
- It's suitable for moulding of toe puffs made of different materials.
- For hot moulding, upper and lower moulds can be heated simultaneously to soften vamp for better jointing.
- For cold mould clamp, Teflon band and toe mould are combined to use, which can be freely adjusted in light of vamp thickness and can achieve a perfect moulding effect.
- The last toe is made of Teflon band based on that offered by customers with a high precision.
- The hot mould of the machine contains steam system which will make the vamp more flexible and lustrous.
- The adoption of environment-friendly freezing system features high speed and good result with freezing temperature up to 30°C
- After moulding, the liner, rubber sheet and vamp are closely jointed without crinkling, deformation and bubbling.

SPECIFICATIONS:

Dimension (LxWxH)	900 x 1600 x 1700 mm
Net Weight	370 kg
Air Power	5-6 kg/cm
Power Consumption	2.7 kw
Heat	400 W
Voltage	220 V
Production	1200-1500 pairs/8hrs

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com



GL-589A


Hydraulic Auto Heel Seat Lasting Machine

FEATURES:

- This machine is equipped with the lasting height micro switch, which makes the machine easily adjusted and finds position accurate.
- The forming bands are wrapped by chain and can accordingly produce a good forming effect.
- This machine adopts gears, gears racks and ratchets to quickly a precisely adjust the auxiliary supporter.
- The second time and pressing of the last supporter works with the wiper-heating device to increase the lasting effect. It smooths thin areas and upgrade the quality of the shoes.
- Special design of rising oilwqy of shoe tree holder controls completely the shoes tree in the set position in the course of upper-binding.
- The appearance of this machine is streamline form, wonderful design.

SPECIFICATIONS:

Dimension (LxWxH)	1200 x 770 x 1430 mm
Packing Size (LxWxH)	1300 x 830 x 1550 mm
Net Weight	590 kg
Electro Heat	0.4 kw
Power	2 HP
Production	2000 pairs/8hrs

Gruppo leader di aziende fornitrici di macchinari, accessori e sevizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com



GL-701A



Thermo-Cementing Edge Folding Machine

FEATURES:

- The machine is the combination of thermo-cementing machine and edge folding machine. Leather can be cemented and edge-folded by it, that can save the process of workers gluing on the machine and improving the efficiency.
- The machine uses thermo-cement and can also fold the edges glued leather.
- Rotating button adjusts the temperature, flow quantity of thermo-cement with easy regulating and accurate indicating.
- Light sensitive resistance controls the discharge stably and accurately.
- The machine have the cutting device, new style folding device and improved pressuring and guiding device etc.
- New style regulator regulates the speed conveniently.

SPECIFICATIONS:

Dimension (LxWxH)	1200 x 550 x 1250 mm
Power	1.65 w
Voltage	220V

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com



GL-878MA



PULLING OVER AND CEMENT LASTING MACHINE

FEATURES:

1. Flash-open for Toe Pincers: Decreases tension on shoe uppers effectively.
2. Last Support Double Rise System: Lowers the possibility of breaking shoe uppers.
3. Independent Pincer Pull Adjustment: Balances the tension on upper automatically at any point.
4. Automatic Rear Pincer Turning: Helps obtain good fit to the last on shoe waist areas.
5. Pincers Plate Position Movement Quickly: adjusts the distance between toe pincer and injector.
6. Quick-change Injector System: Provides instant shoe pattern change, greatly reduce down time.
7. Motor-driven Cement Feeding: Smooth cement feeding, cement jam is greatly reduced.

SPECIFICATIONS	
Machine Size (LxWxH)	1695 x 1250 x 1935 mm
Packing Size (LxWxH)	1880 x 1340 x 2210 mm
Capacity (8hrs)	1500 pairs
Power	2 HP
Heating	1100 W
N.W.	1122 kg
G.W.	1322 kg
No. of Pincer	9

GL-2003-2



Sole Attaching Machine (Twin Station)

FEATURES:

- Comprehensive copying compressing.
- Applicable to compress all kinds of shoes.
- Double work unit, double deficiency.
- Suitable for attaching soles with shoe uppers.

SPECIFICATIONS:

Dimension (LxWxH)	860 x 825 x 1050 mm
Net Weight	285 kg
Voltage	220V, 50Hz
Compressing Time	2~99s
Gas Pressure	0.2~0.7Mpa
Efficiency	350 pairs/hrs

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com



GL-LAM2



Leather Area Measuring Machine

FEATURES:

- Compared to the traditional machine ,machine have biggest features and take small space.
- It is driven with belt transmission.
- With the transparent and separate roll, it can flatten the curled leather effectively and increase the measuring accuracy.
- Equipped with the advanced infra-red digital scanning device, so as to improve the measuring performance.
- It is equipped with automatic printer for auto-printing function.
- Easy operation, single-phase power.

SPECIFICATIONS:

Model No.	Working Width	Dimension
GL-LAM2-18	1.8 m	2300 × 900 x 1100 mm
GL-LAM2-20	2.0 m	2500 × 900 x 1100 mm
GL-LAM2-22	2.2 m	2700 × 900 x 1100 mm
GL-LAM2-24	2.4 m	2900 × 900 x 1100 mm
GL-LAM2-26	2.6 m	3100 × 900 x 1100 mm
GL-LAM2-28	2.8 m	3200 × 900 x 1100 mm
GL-LAM2-30	3.0 m	3400 × 900 x 1100 mm
GL-LAM2-32	3.2 m	3600 × 900 x 1100 mm

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com





GL-04-28S



Hot Air Seam Sealing Machine

FEATURES:

1. Double stepping motors, independent speed control for upper and lower rollers (suiting for different elastic materials).
2. Integral cast machine body. the running performance of the machine is more stable.
3. Multiple sealing programs (tape start, middle and ending), provide more convenient operation options.
4. Intelligent tape feeding mechanism makes tape sealing more smooth and pinpoint at elastic fabric elongate problems.
5. Single axis nozzle track movement is more efficient. productivity increased by 30%.
6. PLC system makes operation more easy and stable. software upgradeable.

SPECIFICATIONS:

Power Supply: AC 220V 50/60Hz
Heat Force Control: room temperature ~ 700°C
Air Pressure: 0.3 - 0.5Mpa
Power Consumption: 3100W
Max Speed: 20m/min
Nozzle Width: 10 - 30mm, Standard: 22mm
Press Wheel Width: 25mm
Up Wheel Press: 1 - 1.5kg/cm²
Dimension: 1200(L).600(W).1700(H)mm
Net Weight: 116kg
Gross Weight: 136kg

*Machine design/colour/specification subject to change without prior notice.

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per
le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-120LR


Auto-belt loop cutter (cold & hot)

Product introduction:

- You can cut strip tapes automatically and neatly.

Special features:

High speed: It can cut 70-90 cut per minute. (50mm long)

Accuracy: Cut-length is accurate owing to a stepping motor.

Cutting type: Melting & cutting by hot knife, woven label is cut neatly without fraying but not for heavy materials and installed with anti-static electricity device.

Automatic operation: It works automatically only by setting length and quantity.

Automatic stopper: It stops automatically if materials run out during operation.

Memory: Set-length, set-q'ty & set-speed are not erased even if power off & on.

Application:

Belt loop, bag band, shrink tube, string, elastic band, plastic zipper, etc.

Technical parameters:

Cutting Length mm	20-99999
Cutting Speed p/min	90
Max.Cutting Width mm	95
Max. Blade Temp.	C300
Frequency Hz	50/60
Voltage V	110/220
Power kw	0.6
Weight kg	24/29
Stand Package Size L.W.H(mm)	560x420x405

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-133H



Automatic Air Pressure Last Inserting Machine w.Roller

FEATURES:

- Through the touch screen and optical fiber induction control pneumatic system, the machine realizes man-machine conversation to complete the last inserting action, with high automation simple operation and high efficiency. Adding pneumatic roller can make upper fit last better and make operation easier.

OPERATION:

- Turn on the switch the power indicator light of the machine will be on, after the fiber sensor and touch screen are powered on, put the shoe last into the positioning seat and the machine will cooperate with the operator to automatically complete the process according to the preset procedure. The program is divided into two working modes: automatic and manual.
 - 1- Automatic: The whole process of shoe last from the rise to fall of last pulling mechanism and rolling upper is completed automatically.
 - 2- Manual: Except that the last pulling mechanism is controlled by the electric sensor to rise automatically, other last pulling actions (segmentable) and roller pressing are completed by foot switch. After the last is put in, the rising action time: the distance between the first last and the interval between the first last and the second last can adjusted on the touch screen.

SPECIFICATIONS:

Dimension (LxWxH)	56 x 52x 146 cm
Voltage	220V
Air source	4KGs
Weight	82KGs

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-229C-2


DOUBLE STATION TOE-PUFF ATTACHING MACHINE

FEATURES:

- Model GL-229C-2 is two stations thermoplastic toe puff coupling machine.
- The machine is mainly used for vamp leather and sheeting tip binding.
- The material of sheeting tip can be pasted with vamp by pre-spraying thermoplastic glue or pre-spraying glue over ordinary material and coating with glue inside, then binding with vamp.
- This machine adopts pneumatic driving and use upper and lower arc moulds to bind the vamp leather with sheeting tip. The binding shall be done after the inside is coated with glue so that the vamp leather and sheeting tip can be bound together as an integral part.
- The design of arc shape upper and lower moulds will facilitate the processing later. The arc upper mould is provided with heating device to melt the pre-coated glue and will make the vamp firmer after pressing.
- The time and temperature of pressing can be adjusted upon the requirement of processed materials.
- Under the lower mould, there is a small pole, which can conduct pressing by upper mould after the sheeting tip is pressed in alignment. This design can ensure accurate location of sheeting tip on vamp.

SPECIFICATIONS:

Dimension (LxWxH)	510 x 660 x 1630 mm
Net Weight	100 kg
Air Consumption	52 Lt/min
Power Supply	0.8 kw
Pressure	6 Bar

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-238C/238SC


Chill Master

FEATURES:

- This machine adopts advanced technology and imported compressor and components.
- The conveying belt made of special material provided with refrigerating regulating device can accelerate stabilization and aggregation of aqueous glue to ensure perfect jointing and keep optimal shape after delasting and is free of mold growth.
- Double side concentrated heat insulation material used in the shell has good heat preservation performance and can reduce energy consumption.
- The large power refrigerating system with double track cooling air and double auto-doors is equipped with automatic unfreezing device has the turnover of last and decrease production cost.
- The powerful refrigerating system and high rotation speed air circulation system will reach up to -20°C instantly.

<u>SPECIFICATIONS:</u>	<u>GI-238C</u>	<u>GI-238SC</u>
Dimension (LxWxH)	3380 x 900 x 1500 mm	2000 x 900 x 1500 mm
Working Temperature	- 30° C	- 30° C
Voltage	380 V	380 V
Air Pressure	0.5 Mpa	0.5 Mpa
Power	3 kw	2 kw
Production	1500 pairs/ 8 hrs	500 pairs/ 8 hrs

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-288C/288SC



Heat Setter

FEATURES:


- This machine will use high temperature steam & hot air from drying to mould the upper softly and effectively in speedy manner. It can save power energy and last.
- It is provided with special stainless steel heating chamber. The convection of hot air and steam in the chamber can relieve the stress inside the upper and make it more closed to the last. It has thoroughly altered the conventional process with heating parts baking the upper unscientifically so as not to influence the flexibility and glossiness.
- The adjustable temperature controller can set the optimal temperature in light of shoe materials.
- The speed can be controlled by regulation of timer.

SPECIFICATIONS:	GI-288C	GI-288SC
Dimension (LxWxH)	3500 x 960 x 1660 mm	1950 x 960 x 1660 mm
Working Temperature	+200° C	+200° C
Voltage	380 V	380 V
Air Pressure	0.5 Mpa	0.5 Mpa
Power	13 kw	10 kw
Production	1200-1500 pairs/8hrs	500-800 pairs/8hrs

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-296B

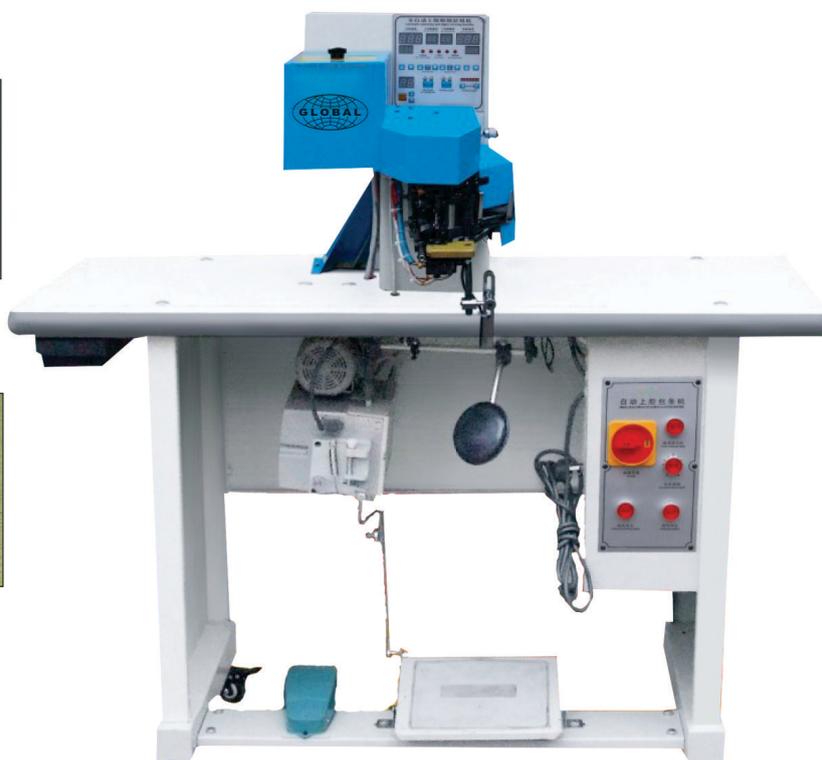

Automatic Cementing And Zipper Covering Machine


Specification

1. The width of zipper is 3#5#7#.
2. It adopts touch control panel. The glue melting temperature, out-gluing quantity and out-gluing temperature are digital display and can be adjusted.
3. It is automatic feed, auto-glue, auto-covering zipper. Stable performance makes the glue area smooth and beautiful.
4. The operation speed can be adjusted. Automatic positioning of servo electronic motor
5. Two models, one is attached with zipper pull head which can automatic slow speed around the corner, the other one is not attached with zipper pull head. You can choose which one is better for you.

型号 (MODEL)	功率 (POWER)	产量 (OUTPUT)	外形尺寸 (DIMENSIONS (L*W*H))	净重 (NET WEIGHT)
GL-296B	0.95千瓦 (KW)	1500个/8小时	1250×690×1330毫米 (mm)	145千克 (KG)

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

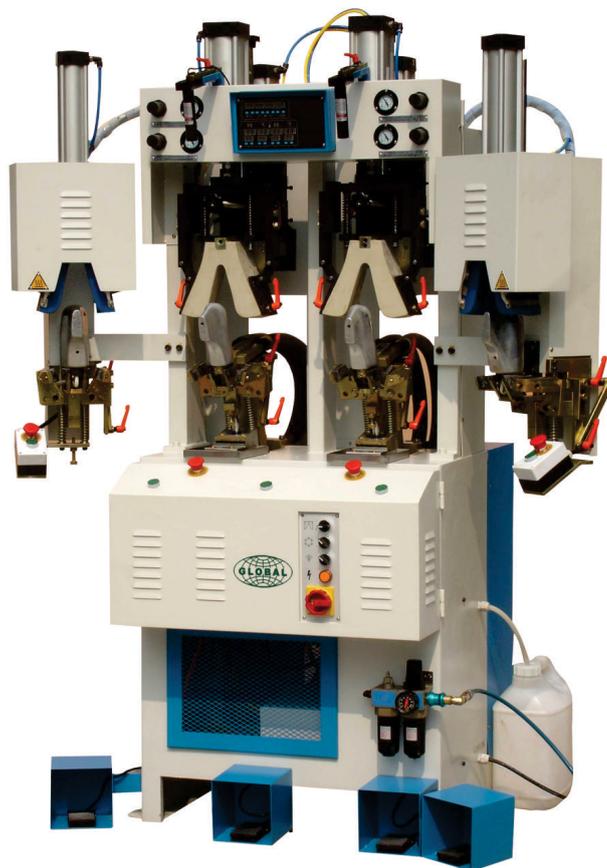GL-296C


Backpart Moulding Machine

FEATURES:

- With double cooling and double heating, it contains sweeping knife and adjustable pull-down grip jaw.
- The assembling and un-assembling of moulds is very easy and convenient.
- The moulds can be tailored upon requirement.
- The sweeping knife system is adjusted with small hand-wheel easily.
- The lower mould can be tilted towards the operator.
- The mould column is moveable.
- The sliding pull-down grip for cooling mould will make women's shoes/boots with high vamp get a perfect moulding.
- Micro-electronic processing system.
- Rubber sheet downward pressing action mode.

SPECIFICATIONS:

Dimension (LxWxH)	890 x 1450 x 2000 mm
Net Weight	620 kg
Air Consumption	87 LT/min
Power Consumption	2.7 kw
Production	1300 pairs/8hrs

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com



GL-300



LEATHER SPLITTING MACHINE

FEATURES:

- Splitting thickness displayed by plc LCD, the infinitely variable adjustment of feeding accurate number counting function.
- With automatic feed registration device, no need to adjust cutting tool.
- With function of dropping out when it is splitting.
- Adjust the clearance of pressure pad and cutting tool automatically to make the splitting precision much higher.
- Freestanding set of dust absorbing device, automatic detection system of electronic phase.


SPECIFICATIONS:

Packing Size (LxWxH)	1330 x 1130 x 1200 mm
Min thickness of cutting	Adopt two feeding rollers 0.6-8mm Adopt feeding bar 0.2-8mm
Band-Knife Size	2630 x 50 x 0.6 mm
Gross weight/net weight	580kg/500kg
Motor power	3.2kw
Max Split Width	300mm

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-350L

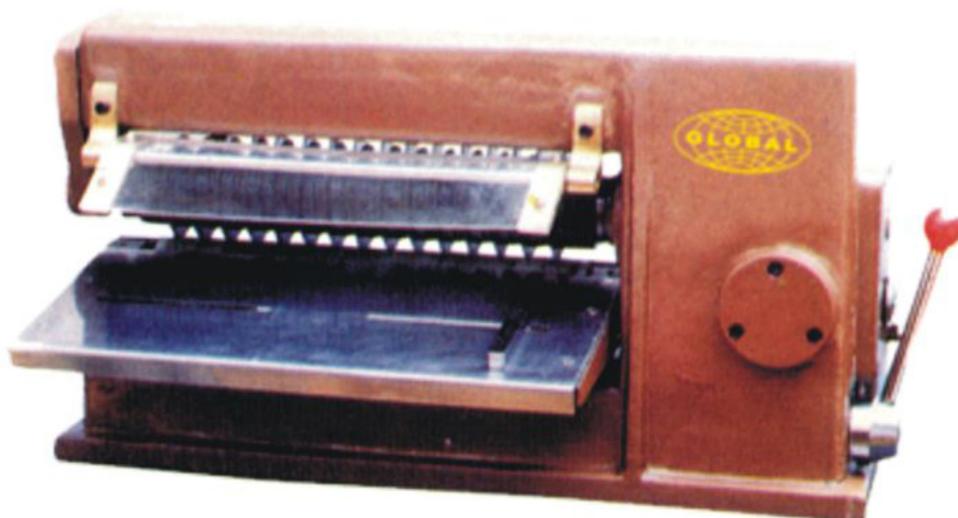

STRAP CUTTING MACHINE

FEATURES:

- Suitable for cutting leather, vinyl, rubber, sponge, etc. into straps.
- Very strong cast iron is practically noiseless when operating.
- Cutting width from 2-350mm and any length of strap can be cut.
- Equip with 10 round blades, standard washers and accessories.

USAGE:

For cutting leather with adjusting width.

SPECIFICATIONS:

Power	550w, 220v
Dimension (LxWxH)	1200 x 550 x 1100 mm
Net Weight	80 kgs
Working Width	350 mm
Cutting Thickness	10 mm

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-902N-A1/A2

GL-902N-A1



**Pneumatic De-lasting Machine
Single Station**

GL-902N-A2



**Pneumatic De-lasting Machine
Double Station**

FEATURES:

- Equipped with necessary mechanisms & adjustments in order to get used to all types of leather shoes & other materials as well as to all sizes.
- Adjustable low pressure of slipping, protecting the last & pins.
- Easy to delasting of plastic last from lasted upper.
- Adjustment for very sensitive, heavy & difficult shoes.
- Fully automatic pad height adjustment.
- High productivity is obtained without damaging the shoes.
- Suitable for delasting for all types of lasts from shoe.

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-905



Auto Seam Rubbing, Cementing & Taping Machine

FEATURES:

- This machine is the synthesis The leather though this machine automatically ties hands behind the back side the minute, spreads the hammer to be even time take shape
- Enhance the working efficiency, reduce the working procedure moreover side the minute spreads evenly, does not injury the lining.
- This machine uses the hot melt adhesive, may save on the crepe rubber and conforms to the environment protection requirement.
- The electronic control hot melt rubber temperature the rubber current capacity adjustment is convenient ; the transmitted light felling resistance automatic control rubber , leaves the rubber quantity stably and accurate. Speed at well.
- This machine is suitable for the different body work , The adjustment is convenient. It is easy to operate for staffs.

SPECIFICATIONS:

Voltage:	220V / 50-60HZ
Power:	0.45/0.65kw
Size(L x W x H):	1200x550x1200mm
Net Weight:	113kg

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-917


Automatic Position Setting & Universal Oil Hydraulic Sole Pressing Machine

FEATURES:

- ◆ Oil hydraulic system is employed to guarantee a high pressure and a good pressing affect. Advanced super size screen makes it easy for operator to learn and operate.
- ◆ Sole pressing, edge attaching and toe & back- part constricting can be finished at one time or separately, so this machine is suitable for flat heel shoe, sports shoe and sports shoe with special design.
- ◆ Available for shoes up to size 18.
- ◆ Thanks to the special characteristics of oil hydraulic crock, even shoe with an anomalous profile can get a perfect pressing result.
- ◆ With the improved function of second sole pressing, oil hydraulic crock can adjust automatically according to the different height of sole and ensure a perfect attaching effect.
- ◆ Automatic position setting design of hold down makes it easy to load and unload the shoe so as to improve the productivity and avoid damaging the shoe upper. It is also suitable for high boot and normal boot.
- ◆ Quick parts replacement and easy machine maintenance.

SPECIFICATIONS:

Power	2.5kw
Dimension (LxWxH)	120x128x192cm
Net Weight	1300kg
Capacity	2000 pairs/8h

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com



GL-980A



Automatic Punching & Eyeletting Machine

FEATURES:

- This machine is mainly suitable for eyelet riveting works at high-grade leather shoes, leather goods, clothing bags, office supplies and other industries, suitable for various of leather products, knitted fabrics and composite materials processing
1. The machine adopts intelligent control, standby when the main motor does not start, high efficiency and energy saving
 2. Successively completed for punching and riveting in the same station. Quick and accurate, greatly increased the yield of product
 3. Punching and riveting die adopts imported high strength alloy materials, not easy to wear and tear
 4. Laser positioning, riveting easier
 5. Scram system design for the machine maintenance and maintenance of providing security for the best

SPECIFICATIONS:

Voltage	220V 50Hz
Power	0.6kW
Working speed	120times/min
Suitable sizes	150# -600#
Dimension	1000x605x1530mm
G.weight/N.weight	280kg/240kg

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-989HN2-1



Automatic Hook & D-Ring Fixing Machine (with lower washer)

FEATURES:

- Automatic feeding hook or D-ring button, punching and fixing at the same time.
- Operators no need to manually place the hooks and D - ring before fixing them.
- The automatic feeding and riveting of hooks or D-rings ensures safety and higher work efficiency.
- Used for fixing hooks, D-rings and special buckles on mountaineering shoes, gym shoes and labor insurance shoes etc.

SPECIFICATIONS:

Throat depth:	250mm
Power:	1/2HP,220V
Air pressure:	0.6-0.8MPa
Size(L x W x H):	720x1220x1450mm
Net Weight:	230kg
Gross weight:	300kg

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-2001FB


Rotating Arm Sewing Machine For Bag

FEATURES:

- Suitable for leather bags.

Technical Parameter

Sewing speed	Stepless speed regulating
Stitch	Double lock
Stitch length	3-12mm
Sewing thickness	1.5-5mm
Sewing needle	CP*5
Motor	750w/ 220v / 50-60HZ,
	750w/ 3800v / 50-60HZ
Net weight	126kg
Domestic packing gross weight	192kg
Domestic packing parameter	(L)113x (W)65x(H)140cm
Exportation packing gross weight	192kg
Exportation packing parameter	(L)114x (W)66x(H)140cm

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-2001N-1A



Two Threads Lockstitch Seated Type Shoe Border Stitcher

FEATURES:

- Large bobbin case which can stitch up to 15 strands thread.
- Uniform distance between needle points and avoid deformation of shoe head.
- Life time warranty on horn part.
- Separate type transmission pulley that will run 5 idle turns and cut off power automatically when encountering any obstacle in operation.
- Easy in operation, low noise, inside thread will not be pulled outside.

SPECIFICATIONS:

Dimension (LxWxH)	1020 x 560 x 1220 mm
N.W./G.W.	120/170 kg
Motor	3/4 HP
Function	Inside stitching of shoe
Production	600-1000 pairs/8hrs

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com



Rotating Arm Sewing Machine For Bag

FEATURES:

- Suitable for leather bags, rod box, especially edge sewing for large rod box.

Technical Parameter

Sewing speed	600RPM
Stitch	Double lock
Stitch length	0-8mm
Sewing thickness	1-10mm
Sewing needle	DP*17
Motor	750w/ 380v / 50-60HZ
Net weight	276kg
Domestic packing gross weight	316kg
Domestic packing parameter	(L)130x (W)73x(H)145cm
Exportation packing gross weight	310kg
Exportation packing parameter	(L)x (W)x(H)cm

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-2002FBR


ROTARY 360 DEGREE SPIRAL TYPE SEWING MACHINE FOR LEATHER BAGS

FEATURES:

- Suitable for leather bags, the rocker arm of the machine rotates 360-degree
- All parts were manufactured by HASS CNC machine, which are of high precision.
- Electronic speed motors can be used flexibly, stopping the needle position via computer control.

SPECIFICATIONS:

Sewing Speed	Stepless speed regulation
Stitch	Double lock
Stitch length	2-8mm
Sewing thickness	1.5-5mm
Sewing needle	DPx17
Motor	750W/380V/50-60HZ three-phase 750W/220V/50-60HZ one-phase
Weight	150kg
Exported packing parameter	118x68x159cm

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo



www.footwearmachines.com



GL-747H



GL-747H-30(Thirty degrees)

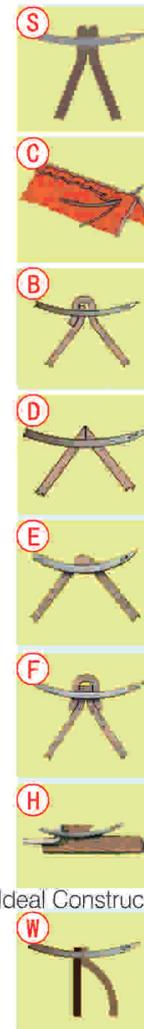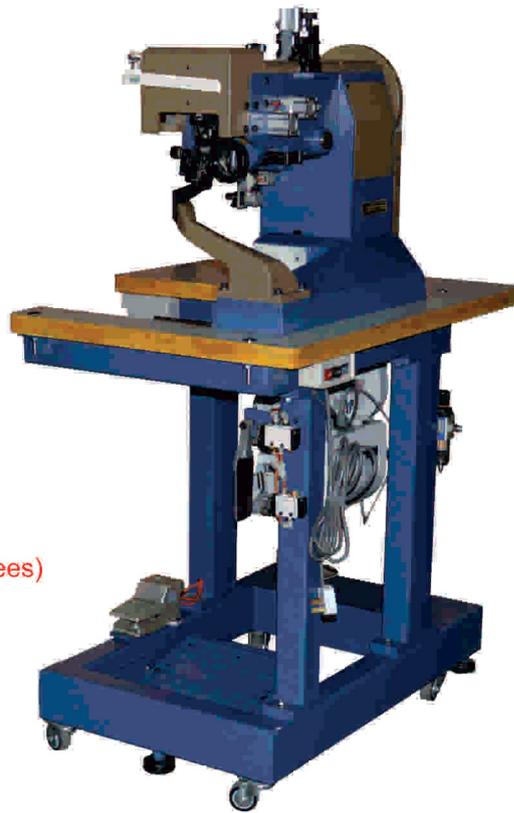

Ideal Construction




Moccasin Sewing Series

Technical parameter:	
Sewing speed	Stepless speed regulating
Stitch length	4-8mm
Sewing thickness	4mm
Sewing thread	Woven wire(1-1.2)
Sewing needle	DY-100(200-300#)
Motor	750W/ 220V one-phase 50-60hz 750W/ 380V three-phase 50-60hz
Net weight	210Kg
Domestic packing gross weight	250Kg
Domestic packing parameter	103*86*152 (L*W*H) cm
Exportation packing gross weight	290 Kg
Exportation packing parameter	103*88*159 (L*W*H) cm
Characteristics:	
1.After years of research and improvement, the machine of the hardware and software are already mature stable and convenient to maintain.	
2.All parts were manufactured by HAAS CNC machines, high precision machining parts.	
3.Through changing the ox horn or parts can sewing S/B/C and other six different help surface suture way.	
4.Presser foot and advanced needle agencies by pneumatic system to control realization.	
5.Adopt servo motor, speed can be flexible, stop the needle position by computer control.	


Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-2017-781-5

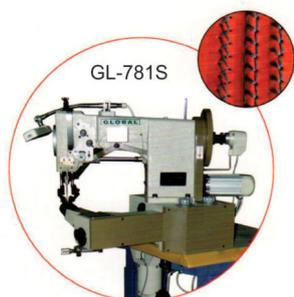

GL-781S

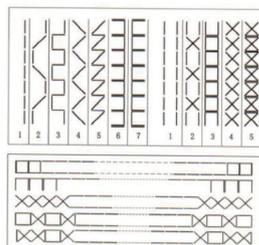

GL-781-5




W-52
H-42

GL-781-5S



W-46
H-39

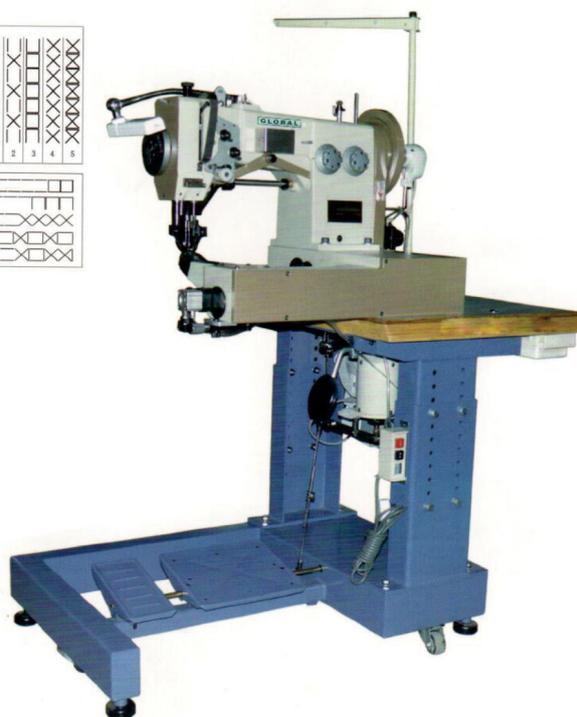

Moccasin sewing series




Specification:

- ◆ Suitable for footwear upper moccasin sewing
- ◆ Twelve sewing patterns to choose
- ◆ Combine sewing patterns according to the needs
- ◆ Especially suitable for footwear with narrow toe

Technical parameter:	
Sewing speed	400RPM
Stitch length	0-8mm
Needle spacing	6mm
Sewing needle	DD*1
Motor	750W/ 220V one-phase /50-60HZ
Net weight	180Kg
Domestic packing gross weight	200Kg
Domestic packing parameter	130*73*135 (L*W*H) cm
Exportation packing gross weight	240 Kg
Exportation packing parameter	131*78*144 (L*W*H) cm
Characteristics:	
1. The machine is designed for tubular moccasin sewing. 12 sewing patterns can be set according to operator' s requirement.	
2. All parts were manufactured by HAAS CNC machines, high precision machining parts.	
3. Using electronic speed motor speed can be flexible, stop the needle position by computer control.	

Gruppo leader di aziende fornitrici di macchinari, accessori e sevizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com



Vertical insole stitching machine series

Technical parameter:	
Sewing speed	Stepless speed regulating
Stitch	Double lock
Stitch length	3-18mm
Sewing thickness	6-20mm
Sewing needle	Straight hook needle(180#240#)
Motor	750W/ 220V one-phase /50-60Hz
Net weight	414Kg
Domestic packing gross weight	458Kg
Domestic packing parameter	110*95*190 (L*W*H) cm
Exportation packing gross weight	496Kg
Exportation packing parameter	98*98*190 (L*W*H) cm
Characteristics:	
1. Applicable to all kinds of shoes outsole and help the thoroughly, especially suitable for sewing processing rosin more strands of sewing thread.	
2.All parts were manufactured by HAAS CNC machines, high precision machining parts.	
3.Using electronic speed motor speed can be flexible, stop the needle position by computer control.	

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-4009-1A &2A

GL-4009-1A



Pneumatic Single Station Fusing Machine

GL-4009-2A



Pneumatic Double Station Fusing Machine

FEATURES:

- With advantage of full-automatic control moving and hot stamping automatically. it saves labor and improves work, efficiency.
- The heating plate is movable and bottom plate is fixed, which ensure clothing will not be migrated.

SPECIFICATIONS:

Voltage	220V/380V
Power	1.4KW
Carriage area	38*38cm
Time limit	0-999sec.
Temperature range	0-399°C
Weight	110Kg
Packing dimension	120*84*80cm

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo



Ultrasonic Welding & Cutting Machine

SPECIFICATIONS:

- Seamless equipment is mainly used for seamless apparel, seamless underdress and so on.
- Seal seam automatically, Dispense with seam sealing tape, Dispense with heating, Conglutinate promptly, Cut fabric margin automatically.

Character:

1. Machine power is enough for all kinds of fabric and Automatic adjusting power according to the thickness of fabric.
2. Use 100% import vibration which has high energy and make the high efficiency conversion between sound and electric.
3. Use high strength steel to decrease abrasion and make longer usage life.
4. Cutter wheel rise and lower easily and keep higher level height.

Technology:

Model	Ultrasonic welding & cutting machine
Power supply	200v±10 50/60HZ
Power	150w
Motor driver power	95v ±10% 50/60HZ
Wheel Speed	0-20m/min

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-7510



UPPER LEATHER WATER PROOFNESS TESTER PENETROMETER

SPECIFICATIONS :

Power Consumption	AC 220V 50 Hz/60Hz
Rated power	50w
Rated Current	1A
Working Pressure	6Kg
Test pressure	1.5Kg-4Kg
Manometry Time	0.01S-99.99H
Landing Distance	250mm
Clamping Frame Length	280mm
Dimension (LxWxH)	910*910*1450mm

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per
le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-BG-21



Single Wheel Grinding Machine with Dust Collector

FEATURES:

- ◆ It is suitable for the edging of irregular objects, such as the end of the belt, the midsole, the wallet, the sign and the keyring, and can be replaced with a variety of different grinding wheels to achieve different effects.

SPECIFICATIONS:

Paking size (LxWxH)	480 x 520 x 750 mm
Gross weight/Net Weight	60kg/40 kg
H.P.	1/4HP

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-BG-24A



Single Edge Painting Machine
(Double Speed Controller)

FEATURES:

- ◆ Leather oil for irregular edges, with a speed control device, the oil side speed free deployment. men and women for a variety of handbags, leather accessories.

SPECIFICATIONS:

Paking size (LxWxH)	420 x 300 x 300 mm
Weight	20 kg
POWER	40W

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-BT-18



Leather Belt Hole Punching & Tip Cutting Machine

FEATURES:

- ◆ The end of the belt for men and women, punching bags and shoulder strap of the drilling, hydraulic equipment, its operation is easy, with a safety device, holes want to change the mold.

SPECIFICATIONS:

Paking size (LxWxH)	820 x 770 x 1200 mm
Gross weight/Net Weight	190kg/140 kg
H.P.	2HP

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-BT-19


Double Head Belt Hole Punching Machine

FEATURES:

- ◆ The hydraulic control unit, able men and women belt cutting tip, tail, set inch adjustable length, tail hole in one operation. Need to follow any regulation holes or the distance between the end with a safety device, easy operation, can improve the quality and yield.

SPECIFICATIONS:

Paking size (LxWxH)	1770 x 760 x 1600 mm
Gross weight/Net Weight	395kg/350 kg
H.P.	2HP

Gruppo leader di aziende fornitrici di macchinari, accessori e sevizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com



Double Wheel Grinding/Buffering Machine with Dust Collector

FEATURES:

Grinding buffing belts for men and women on both sides of the belt after trimming more than the smooth, glossy side again when the dye is more remarkable this machine with a suction device.

SPECIFICATIONS:

Paking size (LxWxH)	500 x 560 x 1058 mm
Gross weight/Net Weight	100kg/70 kg
H.P.	1/4HP

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-BT-25



**Vertical Stand Type Double Edge
Painting Machine**

FEATURES:

- ◆ Color on both sides for belts, in the oil side of the oil with the same first end, with the electric eye sensor automatically speed up the color speed and increase productivity.

SPECIFICATIONS:

Paking size (LxWxH)	400 x 580 x 1520 mm
N Weight/G Weight	75kg/120kg
Power	0.1kw
Voltage	220V/50Hz

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com



GL-BT-30



Belt Trimming Machine

FEATURES:

- ◆ For men and women belts, pet belts, purses, shoulder strap, entrainment, both sides of the same repair, replacement of different tools can produce different results.

SPECIFICATIONS:

Paking size (LxWxH)	900 x 340 x 1120 mm
N Weight/G Weight	130kg/170kg
H. P.	1/2HP

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-BT-34



Belt Coupling Machine

SPECIFICATIONS:

Paking size (LxWxH)	860 x 590 x 1140 mm
N Weight/G Weight	160kg/210kg
H. P.	1HP

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com



GL-BT-55



Automatic Rotary Infrared Oven

FEATURES:

- ◆ Suitable for drying bag should strap, handle, leather strips, belts and etc. after painting;
- ◆ Rotation speed adjustable. Suitable for drying leather straps of width from 20 cm to 120 cm;
- ◆ With infrared lights, oven temperature rises quickly and heat penetrates into leather materials. Heat circulates inside over, saving energy consumption.

SPECIFICATIONS:

Size	2000 x 1550 x 2080 mm
Power	7.5kw
Voltage	380V/50Hz

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com



Conveyor Belt Drying Oven

- Suitable for painting and drying leather belt or watch strap of width 3-80mm.
- Paint thickness and running speed adjustable.
- Painting and drying is completed in one step, improving efficiency and saving power.

SPECIFICATIONS:

Size	5100 x 450 x 1300 mm
Power	7KW
Weight	160kg
Voltage	380V/50Hz
Production	5000Pc/8Hr.

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-BT-124



Four Wheels Buffing and Polishing Machine

FEATURES:

The machine is suitable for grinding, polishing, and waxing the double edges of the belt, handbag straps. The front 2 wheels are for buffing and the backside 2 wheels are for polishing; With the speed adjuster, easy to operate and with dust collector, make the environment clean neat.

SPECIFICATION:

Voltage:	220V 50-60HZ
Power:	1.3 KW
Net Weight:	260KGS
Machine size:	1000 x 1000 x 1370mm

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com



GL-BT-137A

Manual Belt Looping Machine



GL-BT-137B

Pneumatic Belt Looping Machine

SPECIFICATION:

	GL-BT-137A	GL-BT-137B
Voltage:	220V 50-60HZ	220V 50-60HZ
Power:	50KW	300KW
Net Weight:	40KGS	80KGS
Machine size:	400 x 350 x 900mm	400 x 600 x 1350mm

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-FM600


Compact Fusing Press

FEATURES:

- Conveyer belt yields high working efficiency.
- Even temperature in heated area, good effect in fusing.
- Auto-stop with time delay is provided together with teflon device for protection of manual operation during power break.
- Suitable for fusing large sized material, deviation correction, lower noise and fusing of high quality.

SPECIFICATIONS :

Model No.	Speed	Fusing Width	Pressure	Temperature	Voltage	Power	Dimension	Weight
GL-FM600	0-7 m/min	600 mm	1.5 kg/cm ²	0-200°C	220 v 50 Hz	4 kw	1850x1130x280	150 kg
GL-FM600A	0-7 m/min	500 mm	1.5 kg/cm ²	0-200°C	220 v 50 Hz	5.2 kw	1850x1130x280	140 kg

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-HMA801


Hot Melt Adhesive Pasting Machine

FEATURES:

- Adjustable wheel seat and pressure contribute to equal adhesive applying on any kinds of materials with any kinds of surfaces.
- Teflon treated hot melt adhesive through features easy adhesive replacement.
- The temperature can be adjusted according to characteristics of the hot melt adhesive.
- Carbonization of the hot melt adhesive can be effectively prevented.
- The machine is equipped with thermal protector for the motor, the exhaust is also equipped for discharging odor.
- The motor serving as the drive unit for operation is with frequency conversation speed control.
- Emergency stop button is equipped on the machine for sending back the material in case of pressing the button for motor reverse running, thus safety can be achieved.
- Suitable for laminating minimum 0.5m/m surface, such as : shoe, leather product, stationery, paper board box, and sports equipment.

SPECIFICATIONS:

Dimension (LxWxH)	530 x 510 x 1010 mm
Power	2 kw
Voltage	220V / 50Hz
Working Coating range	300 mm

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-HMA851


Hot Melt Glue Spraying Machine

FEATURES:

- Hot melt glue is a kind of thermoplastic matter in 100% solid state without any solvent.
- It can meet the strict requirements of prevention and cure of air pollution and does not have any danger of fire or exploding.
- Two steps of filtering lessens nozzles block.
- Glue barrel, with particularly designed structure, can rapidly melt solid glue.
- The machine is designed to suit hot melt glue in various states and shapes.
- The glue spraying is rapid, stable and uniform.
- Coating area can be easily controlled.
- Suitable for the industries of shoe-making, leather, packaging, woodworking, textiles, toys, sanitary ware, electronics, electrical equipments, etc.

SPECIFICATIONS:

Dimension (LxWxH)	660 x 400 x 1100 mm
Weight	40 kg
Melting Speed	8 kg/hr
Heating Power	2.24 kw
Power Source	220V/50Hz
Main Air Pressure	2 kg
Operation Temperature	Max. 200°C
Volume of Glue Barrel	5 kg
Cementing Strength	1000~2000 CPS

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-LE 1690


Non Metal Laser Engraving Cutting Machine

FEATURES:

- Humanization working table, advance DPS digital-control techque, convenient USB transaction apply, large area working table is to realize large area cutting processing and engraving requirements, movement system adopted straight guide rail and precision gear transaction to ensure processing precision and movement speed.
- It adopted imported straight system to make front and back material-feed frame, all kinds of special appliance.

SPECIFICATIONS :

Laser tube type:	Hermetic and detached CO2 laser tube
Laser power:	80W
Cooling method:	Water cooling
Cutting power control:	Fine turning possible
Cutting speed control:	Fine turning possible
Online air nozzle:	Normal installation
Driving system:	Step motor
Cutting area:	1600mmx900mm
Engraving speed:	0-64000mm/min
Cutting speed:	0-36000mm/min
Measurement(L*W*H)	About 2340mmx1500mmx1170mm
Weight:	Net weight about 350kg
Power Supply:	220V/50-60HZ, 10A Max
Environment requirement:	Temperature15°C-35°C, humidity30%-80%
Auto cutting computer control system:	Built In

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-PUR111


Three Needles Chainstitch Sewing Machine

FEATURES:

- Apply to all kinds of leather shoes help surface and penetrate seam processing.
- All parts were manufactured by HAAS CNC machines, high precision machining parts.
- This machine is three row needles chain sewing machine without bobbin, with upper & lower awl. (can also be a single needle or double needle sewing use), the needle yards evenly, three line parallel beautiful.
- Using electronic speed motor speed can be flexible, stop the needle position by computer control.

SPECIFICATIONS:

Sewing Speed	Stepless Speed Regulating
Motor Power	560 w
Voltage	220/380 v
Needle Spacing	2.4/3.15 mm
Stitch Length	3-6 mm
Sewing Thickness	2-6 mm

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com



GL-WL-52



Pneumatic Folding Machine

FEATURES:

- ◆ Pull the belt soft machine aimed at the belt press hard or soft play soft treatment for a variety of hard strip of the object, instead of a soft artificial hand pull or play soft, high efficiency, speed and good results!

SPECIFICATIONS:

Packing size (LxWxH)	480 x 480 x 1300 mm
N Weight/G Weight	126kg/170kg
H. P.	1/2 HP

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com



GL-WL-450R



Linear Electro Pneumatic Folding Machine

FEATURES:

The machine can do the folding and creasing work at the same time, improve the efficiency;
The folding width and creasing depth is adjustable, easy to operate.
With touch screen, easy for the adjustment work.

Technical data:

Voltage:	220V 50/60HZ
Power:	1.5KW
Temperature:	Max100 C° (adjustable)
Useful folding space:	40cm
Weight:	75 Kg
Dimensions:	60x54x55 cm
Pneumatic supply:	6 bar

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per
le industrie calzaturiere operanti in tutto il mondo

www.footwearmachines.com

GL-PU60


Two Color Pu Sole Pouring Machine (Pu Pouring Machine)

FEATURES:

- The machine with three tanks of 250 liters each & chilling system.
- Double color/density PU Injection machine is an ideal & large one-through shaping equipment to produce top-quality leather shoes, leisure shoes, sports shoes & travel shoes.
- This machine is rationally configured, with convenient maintenance & high reliability.
- The casting machine of patented technology has good comprehensive performance and long service life.
- The material circulation adopts, oil-heating and constant temperature constant to make a reliable & steady quality of the products.
- The machine adopts an annular production line equipped with automatic control system of drying tunnel temperature and the running speed of the production line can be regulated.

SPECIFICATIONS:

Dimension (LxWxH)	19 x 4.5 x 2.3 m
Net Weight	4.5 Tons
Power	28 kw
Length of Production Line	15-19 m
Capacity	700 cm ³
Production	100 prs/hm

Gruppo leader di aziende fornitrici di macchinari, accessori e servizi per le industrie calzaturiere operanti in tutto il mondo