

TY-8BL

Single Needle, Cylinder bed Unison Feed Sewing Machine (Large Hook)




FEATURES

- These machines are equipped with walking foot, needle feed and feed dog, all of which act completely in unison.
- Consequently the upper or lower sewing material does not slip and also these machines can sew accurately and easily several sheets of heavy weight materials piled up together.
- Equipped with a safety clutch mechanism which protects the rotating hook & needle from damage when the thread is caught in the rotating hook.
- **The diameter of cylinder-bed is 78 mm, is ideally suited for stitching tubular and curved article, such as shoes, bags, small articles, purses.....etc.**

Model no.	Sewing speed (spm)	Stitch length (mm)	Lift of Presser foot (lift) (mm)	Needle system	Needle Bar Stroke	Alternating movement
TY-8BL	2800	5mm	13mm	DPX17 #22 (#19~#22)	34mm	2~6mm



Specifications subject to change without notice.



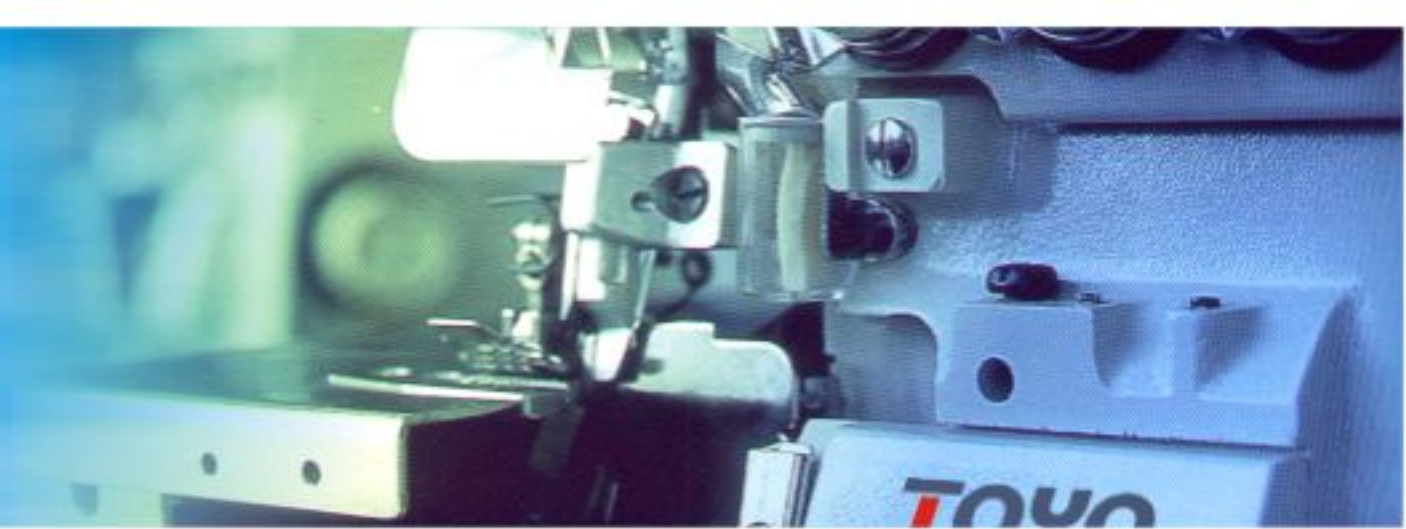

TY-20U43

SEWING MACHINE ZIG-ZAG FLATBED

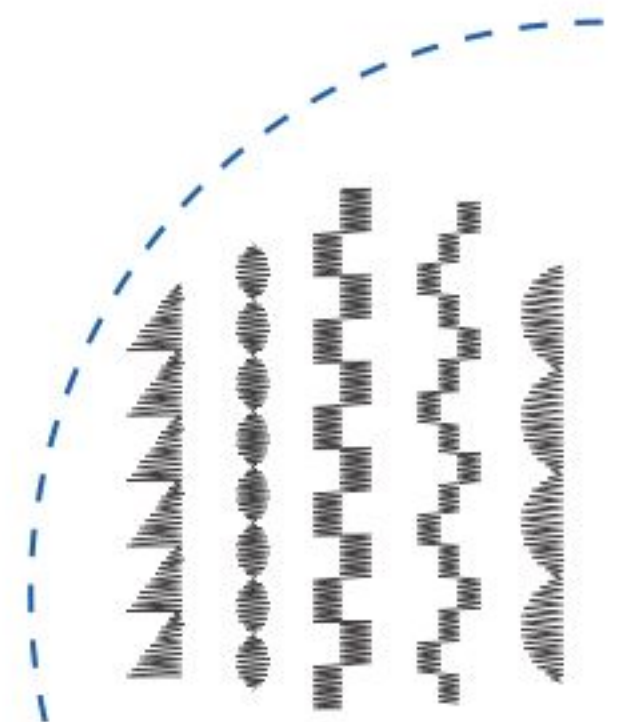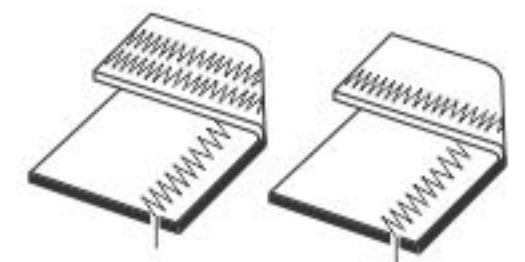


FEATURES

- Zig-zag or straight stitching, easily to be converted.
- Applied with the large & easy-to-operate stitch length dial.
- No stitching flaws & beautifully sewn seams.
- Equipped with the needle position control device, easily to be adjusted by means of a knob.
- The width of zig-zag is adjustable by means of a knee operated bight control and a control knob for zig-zag stitching.
- Open type of top cover simplifies the maintenance.
- These machines are ideally suited for zig-zag sewing on suits, dress, brassiere, children's clothes, uniform, shoes, hats, gloves, bags & leather products, etc.

Model	Max.Sewing Speed	Needle System	Needle Bar Stroke	Stitch Length	Presser Foot Lift		Sewing Material	Motor	Zig-Zag Width	Packing Size L.W.H	GW/NW
					Hand	Knee					
TY-20U43	1800 s.p.m	DP x 5	35 mm	5 mm	6 mm	12 mm	Light Medium	370 w	0-12 mm	555x248x363	25/21 kg

Specifications subject to change without notice.




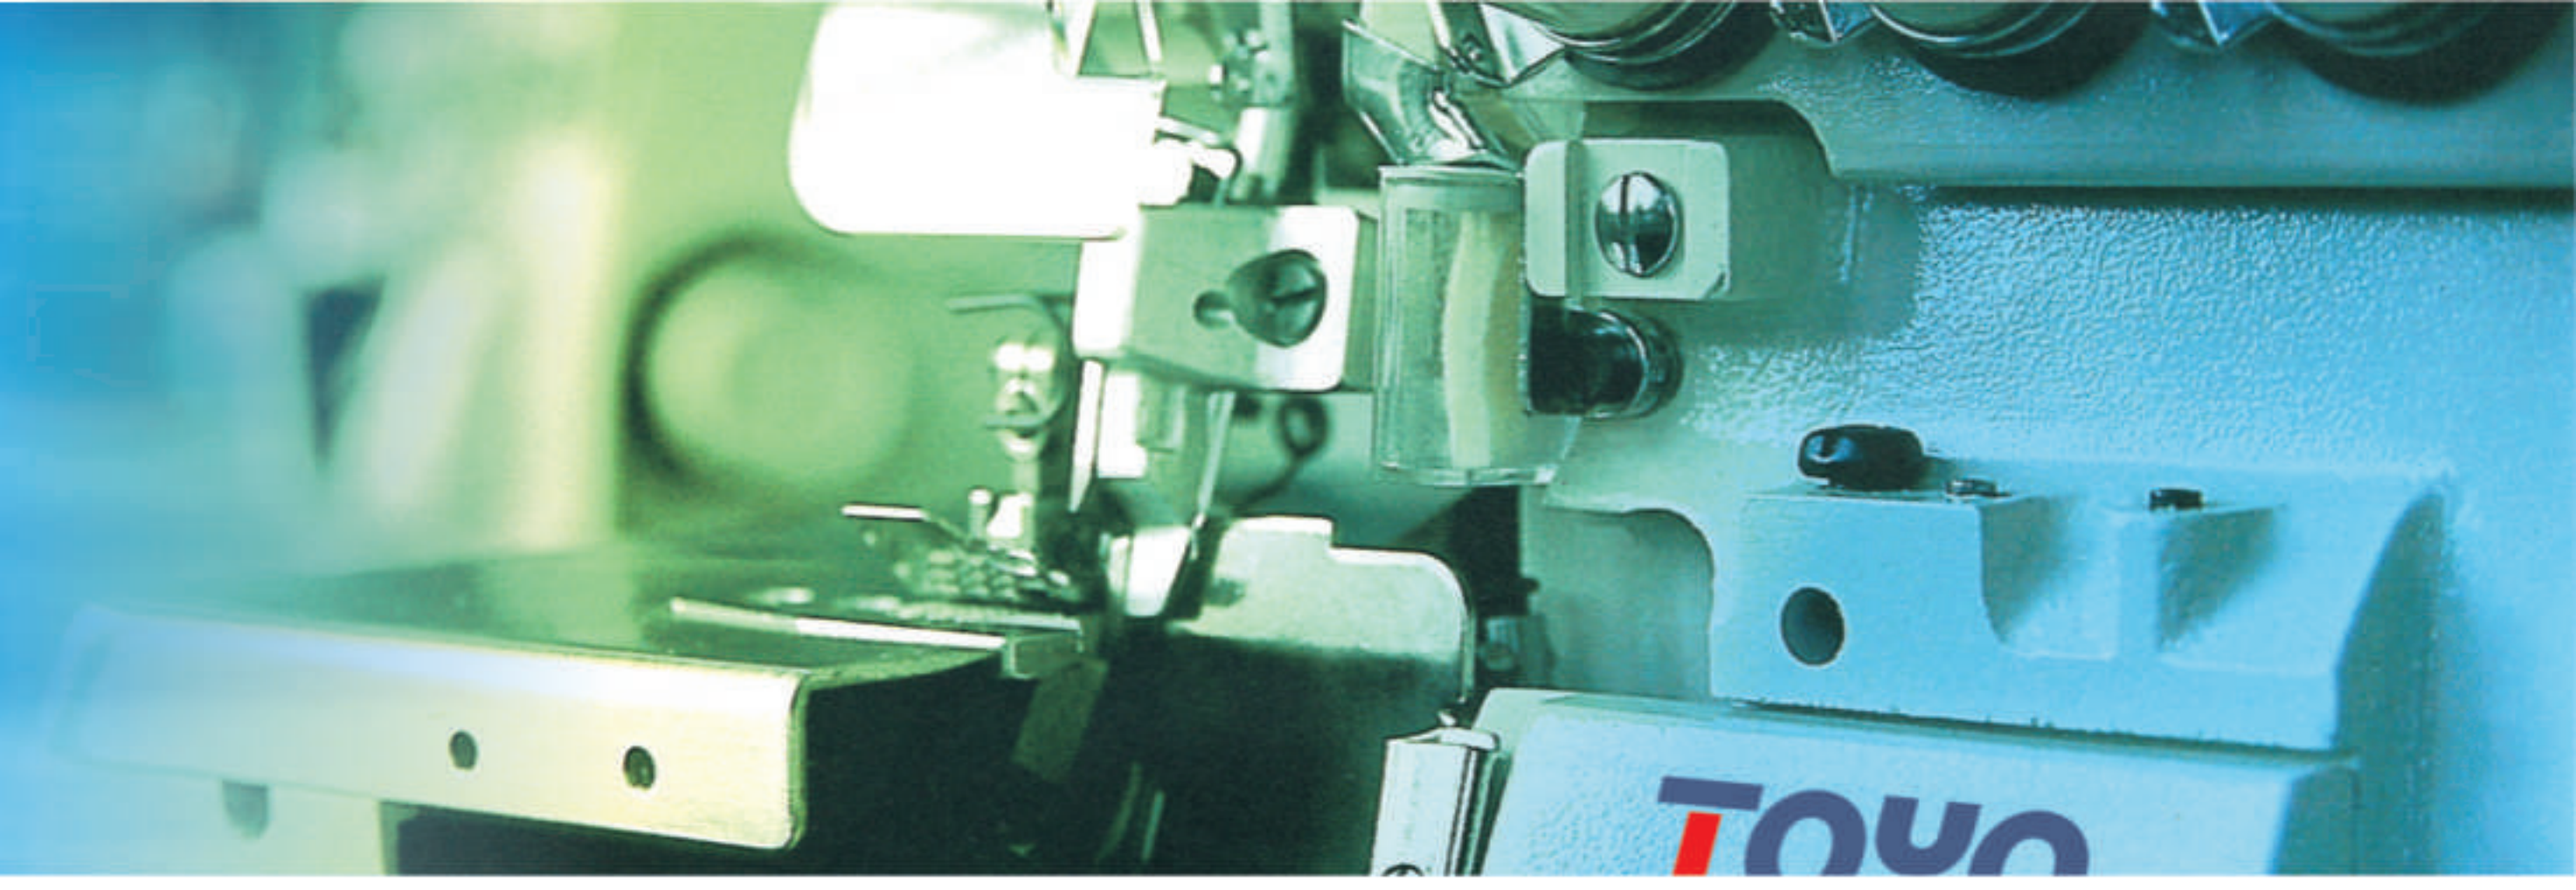

TY-335A-L

TY-335A-LU

SINGLE NEEDLE CYLINDERBED LOCKSTITCH SEWING MACHINE WITH UNISON FEED (LARGE HOOK)

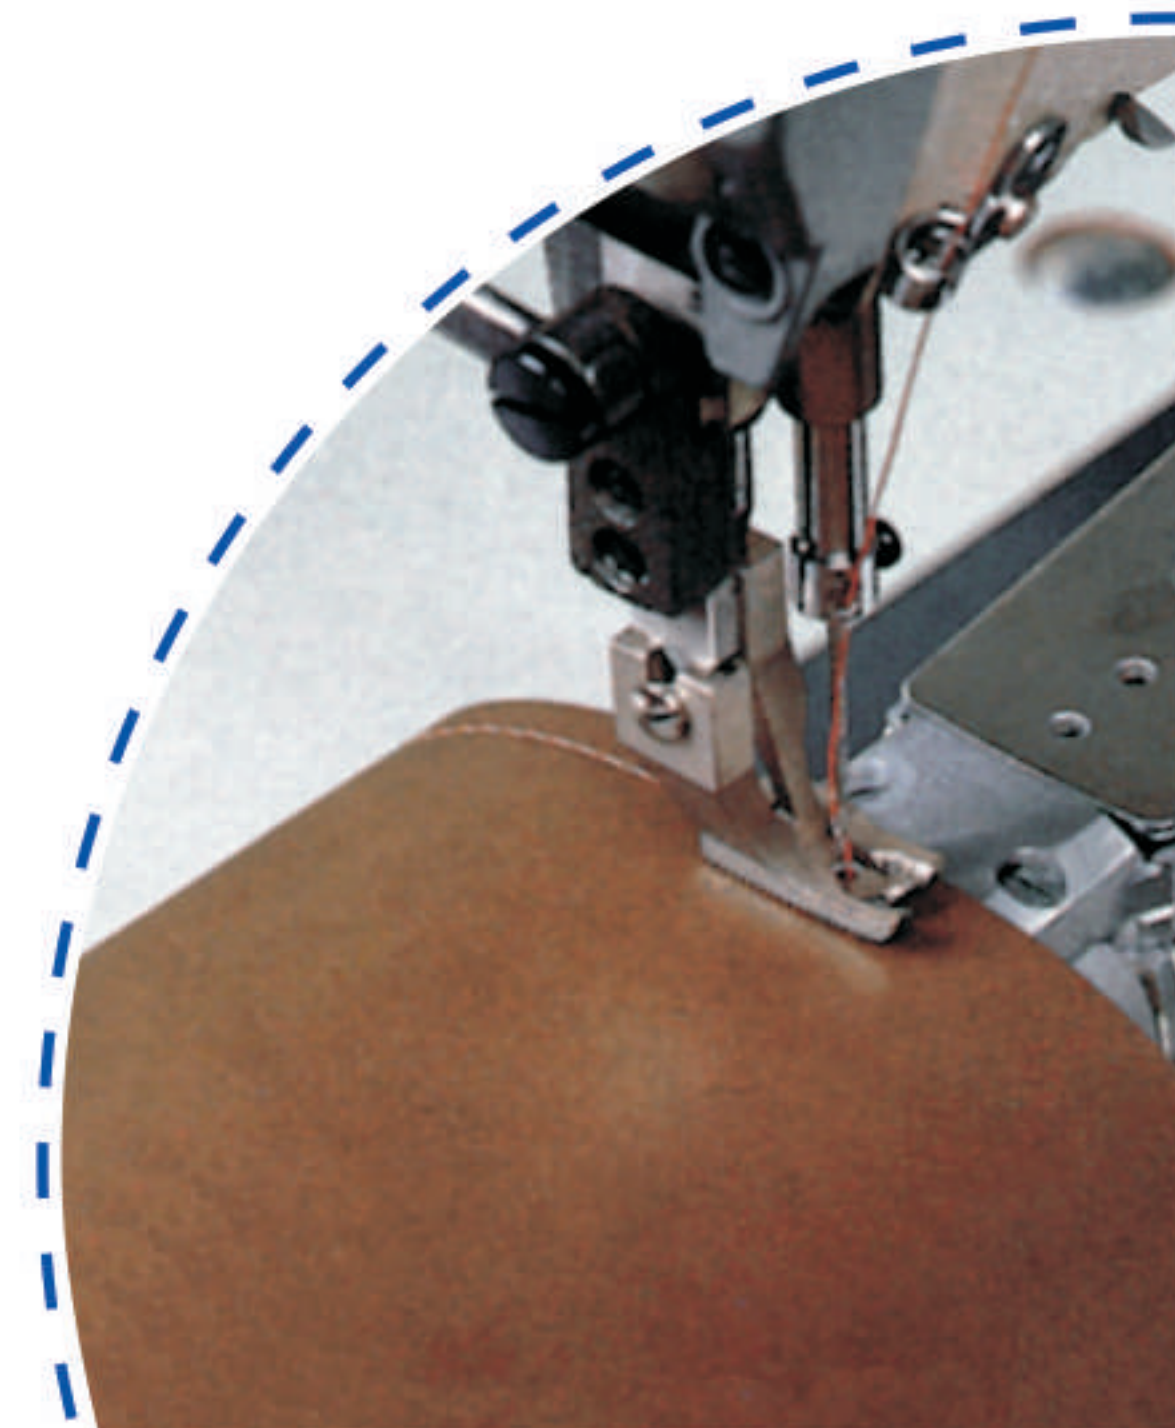


FEATURES

- TY-335A-L has horizontal movement of drop feed.
- TY-335A-LU has elliptical movement of drop feed.
- Automatic lubricating system, smooth and quiet running, easy maintenance.
- Equipped with large hook, the bobbin has twice larger capacity than that of regular hook. This is convenient for long materials sewing as well as with thick thread.
- With unison feed owns good feeding characteristics, even on materials with rough, slippery or tacky surfaces, accurate and uniform stitch.
- Applied the new type of stitch length adjusting mechanism, precisely stitch length setting & stitch length of forward-stitching and back-tacking could be easily adjusted with light touch to the lever, stitching can be reversed.
- These machines are ideally suited for normal stitching of tubular and curved articles, such as shoes, bags, small articles, purses, wallets, etc.

Model	Max.Sewing Speed	Needle System	Needle Bar Stroke	Stitch Length	Presser Foot Lift		Sewing Material	Horizontal Rotating Hook
					Hand	Knee		
TY-335A-L	2000 s.p.m	DP x 17 #18 ~ #24	33.2 mm	0-6 mm	6 mm	15 mm	Medium Heavy	Large
TY-335A-LU	2500 s.p.m	DP x 17 #18 ~ #24	33.2 mm	0-6 mm	6 mm	15 mm	Medium Heavy	Large

Specifications subject to change without notice.



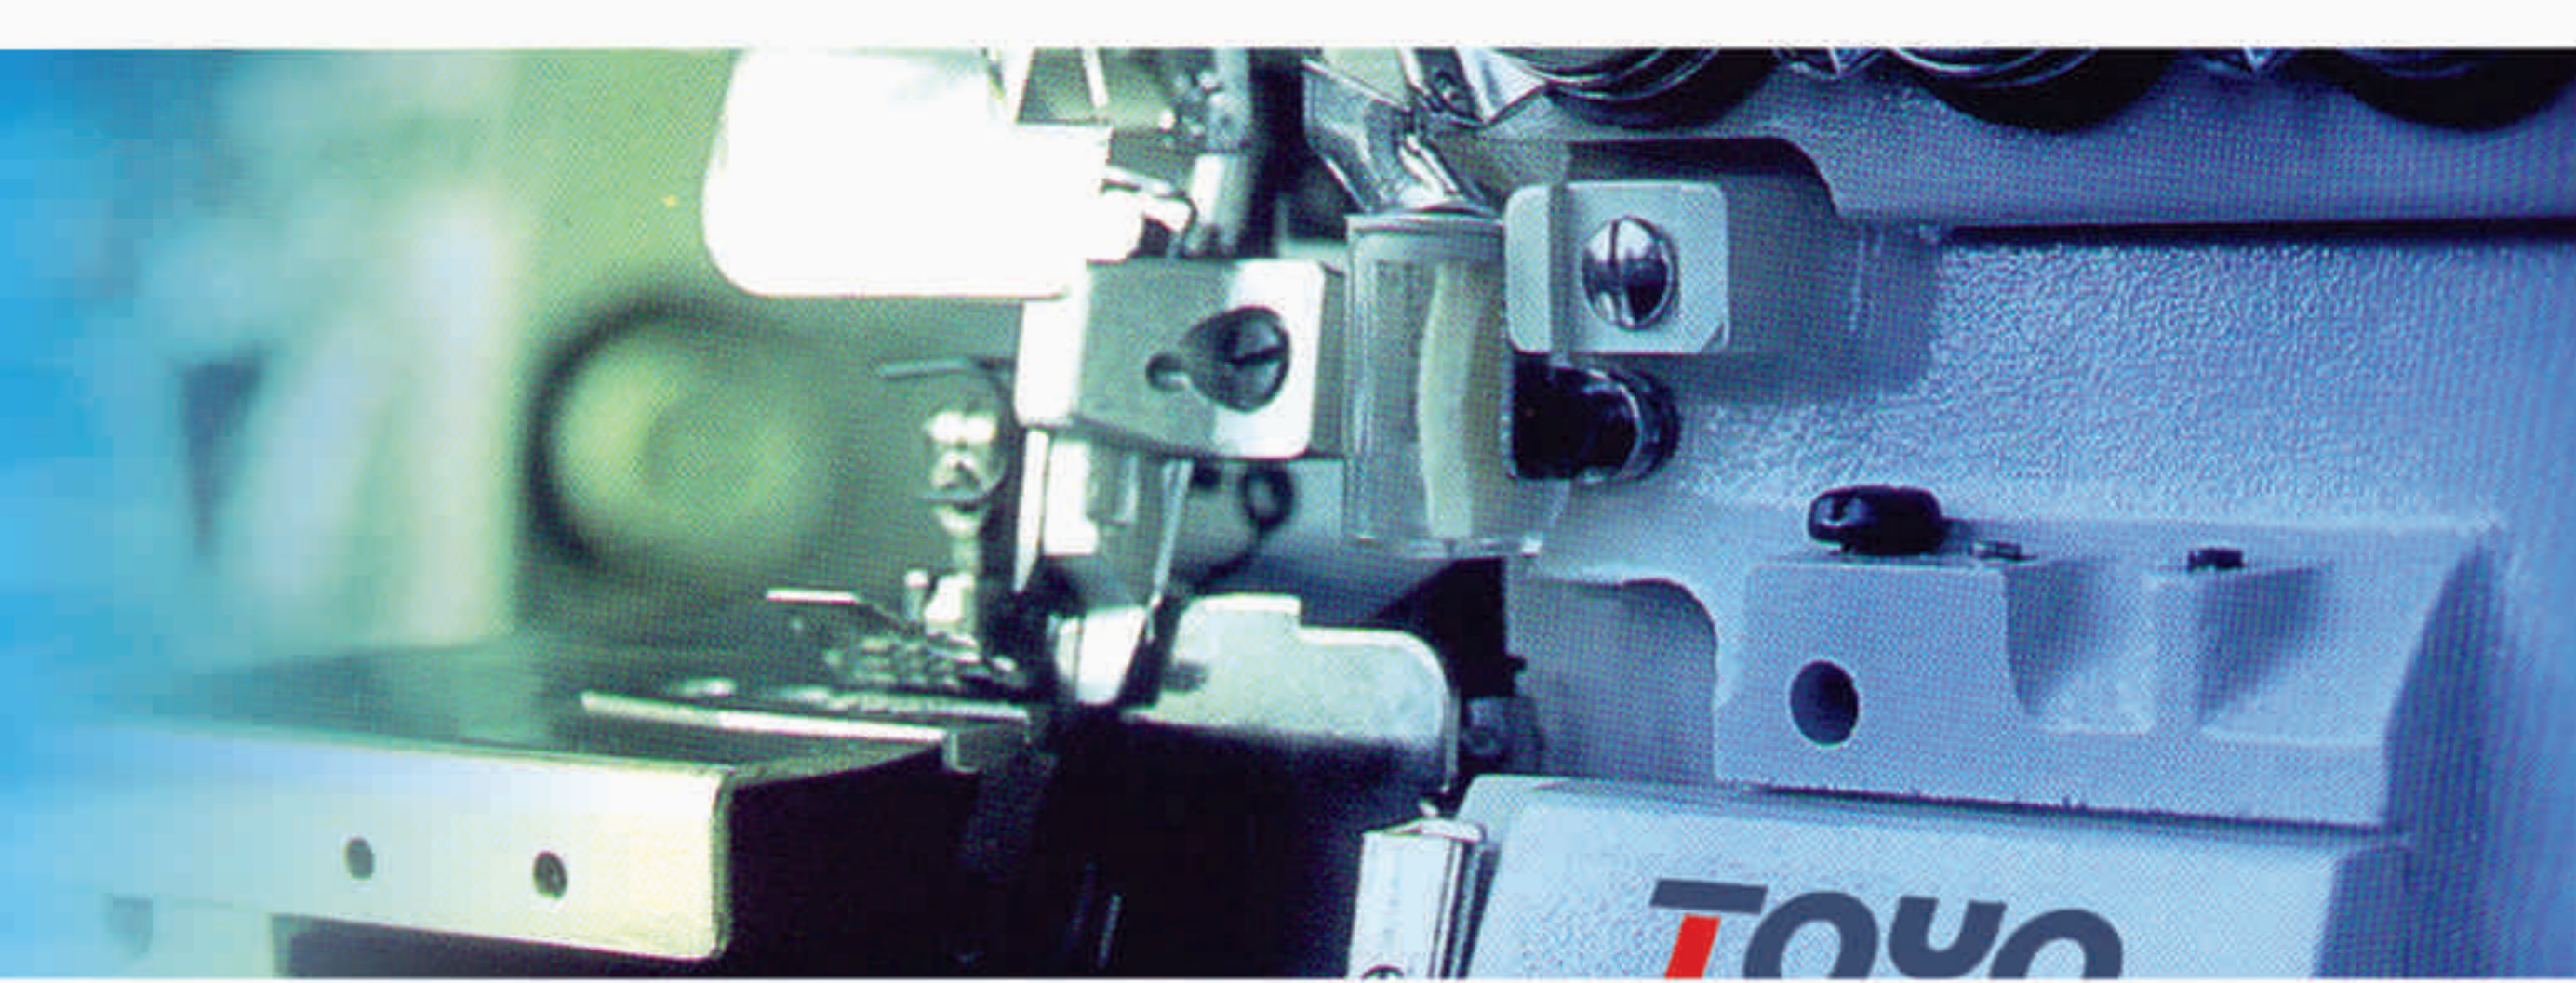

TY-335BH

CYLINDERBED SINGLE NEEDLE UNISON FEED WITH FOLDER ATTACHED BINDING




FEATURES

- Automatic lubricating system, smooth and quiet running, easy maintenance.
- Horizontal movement of drop feed.
- Binder feeding together with unison feed.
- With unison feed owns good feeding characteristics, even on materials with rough, slippery or tacky surfaces, accurate and uniform stitch.
- Diameter of cylinder bed is 46mm which enables easy and unhindered movement of bulky or tubular workpiece.
- Automatic lubricating system, smooth and quiet running, easy maintenance.
- Clearly arranged thread guides.
- Easy infinite stitch length regulation.
- Binders are optional equipment, available at extra cost.
- These machines are ideally suited for stitching, taping, piping, binding for medium and heavy materials such as bags, shoes, purses and other tubular goods.

Model	Max.Sewing Speed	Needle System	Needle Bar Stroke	Stitch Length	Presser Foot Lift		Sewing Material
					Hand	Knee	
TY-335BH	2500 s.p.m	DP x 17	34 mm	5.5 mm	6 mm	15 mm	Medium Heavy

Specifications subject to change without notice.



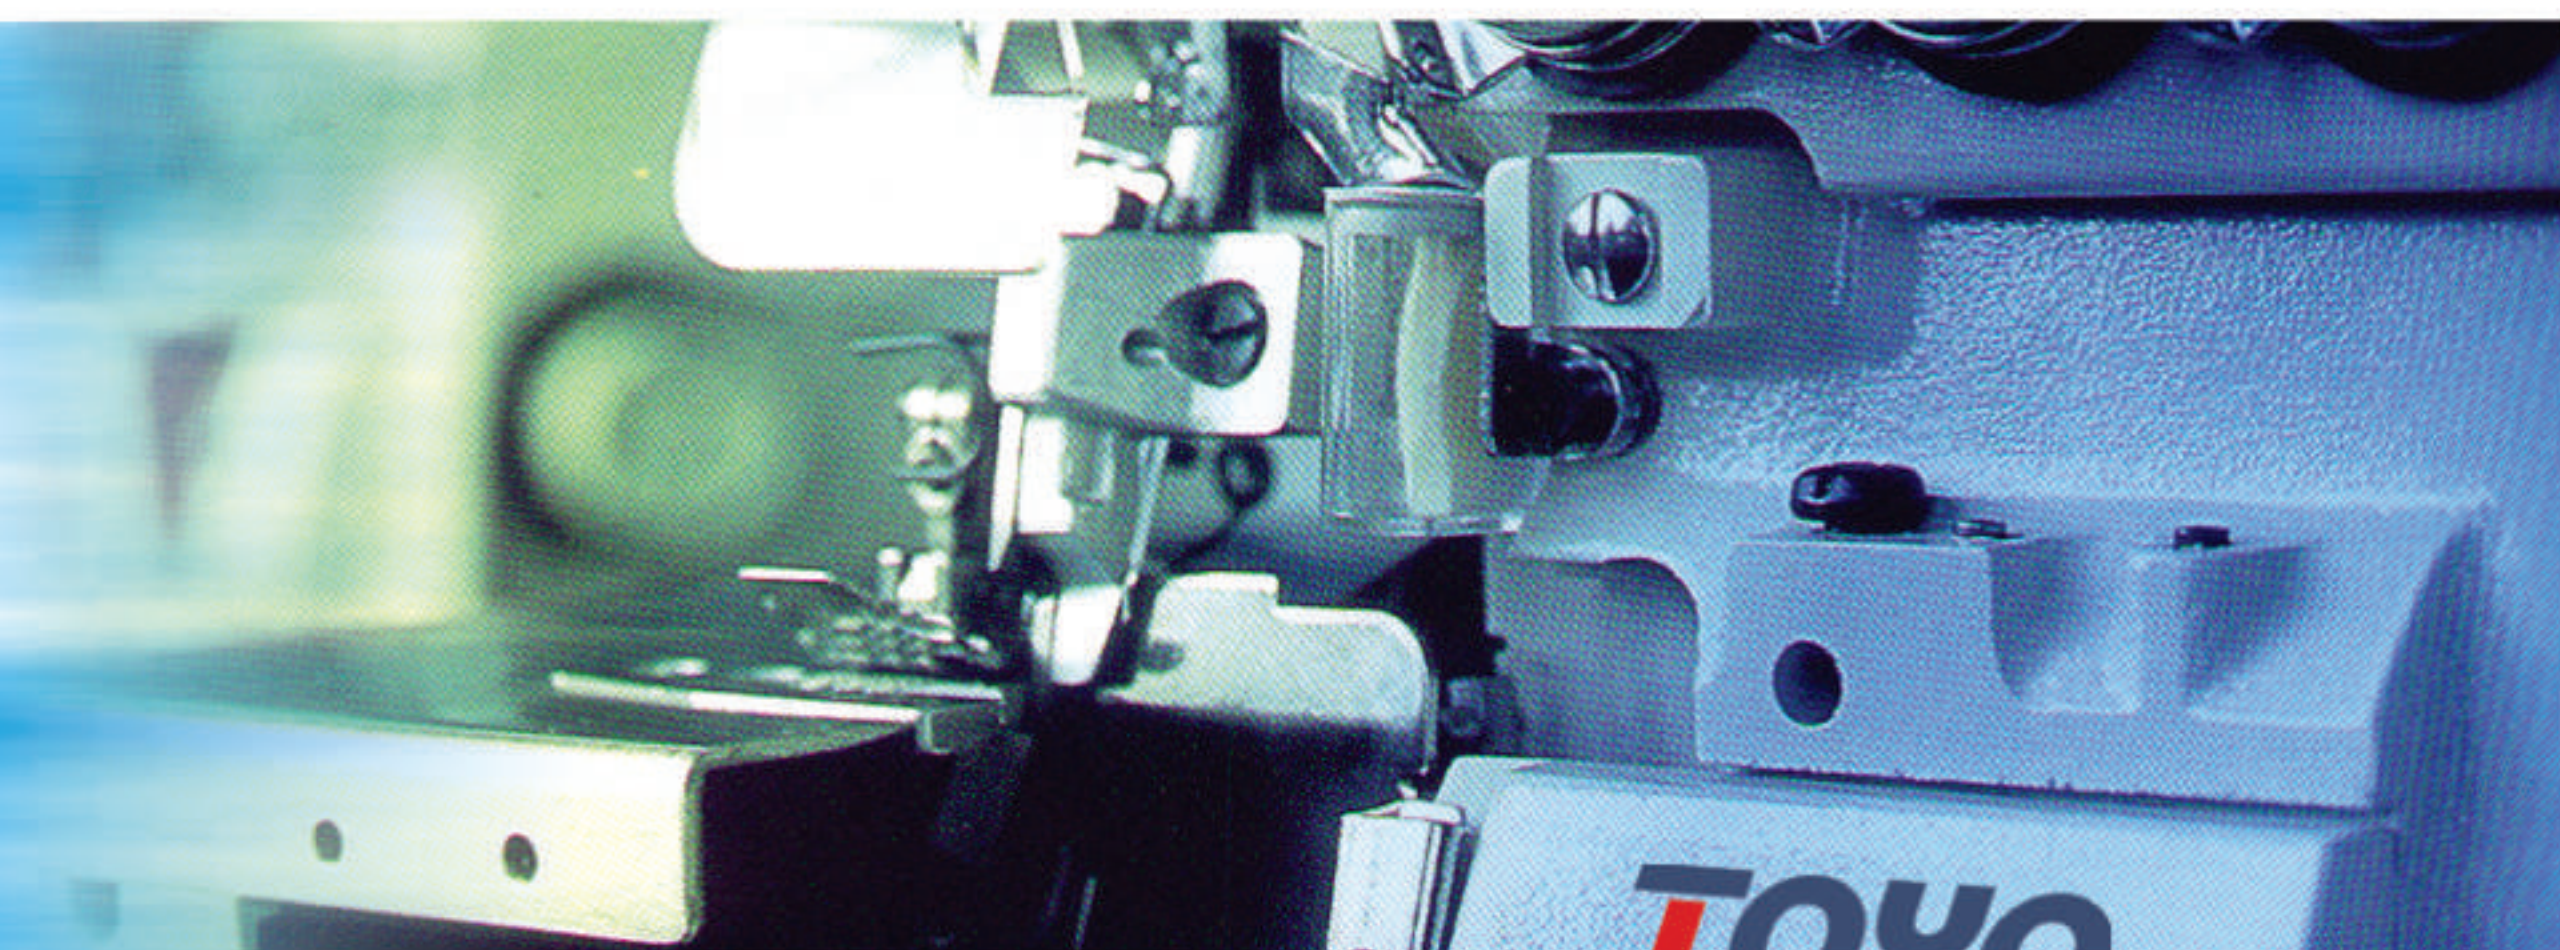








TY-373D

BUTTON SEWING MACHINE(With Direct Drive)



FEATURES

- The mechanical force-transmission system which can prevent error actions at any time.
- The adoption of latest technology to the button sewing mechanism effectively prevents the button from loosening.
- Main parts are applied with high-grade heat-treated steels, which greatly promotes the durability and service life.
- Just at the moment when each button is sewn up, clamp lifts automatically, and then the needle thread is cut out by the shock of button clamp lift.
- This machine is ideally suited for button sewing of shirts, knit goods, underclothes, children's wears, etc.


 Model	 Max.Sewing Speed	 Needle System	 Presser Foot Lift	 Motor	 Packing Size L.W.H	 GW/NW
TY-373D	1400 r.p.m	#16	14 mm	380 w	510 x 350 x 400	42 / 33 kg

Specifications subject to change without notice.







TOYO

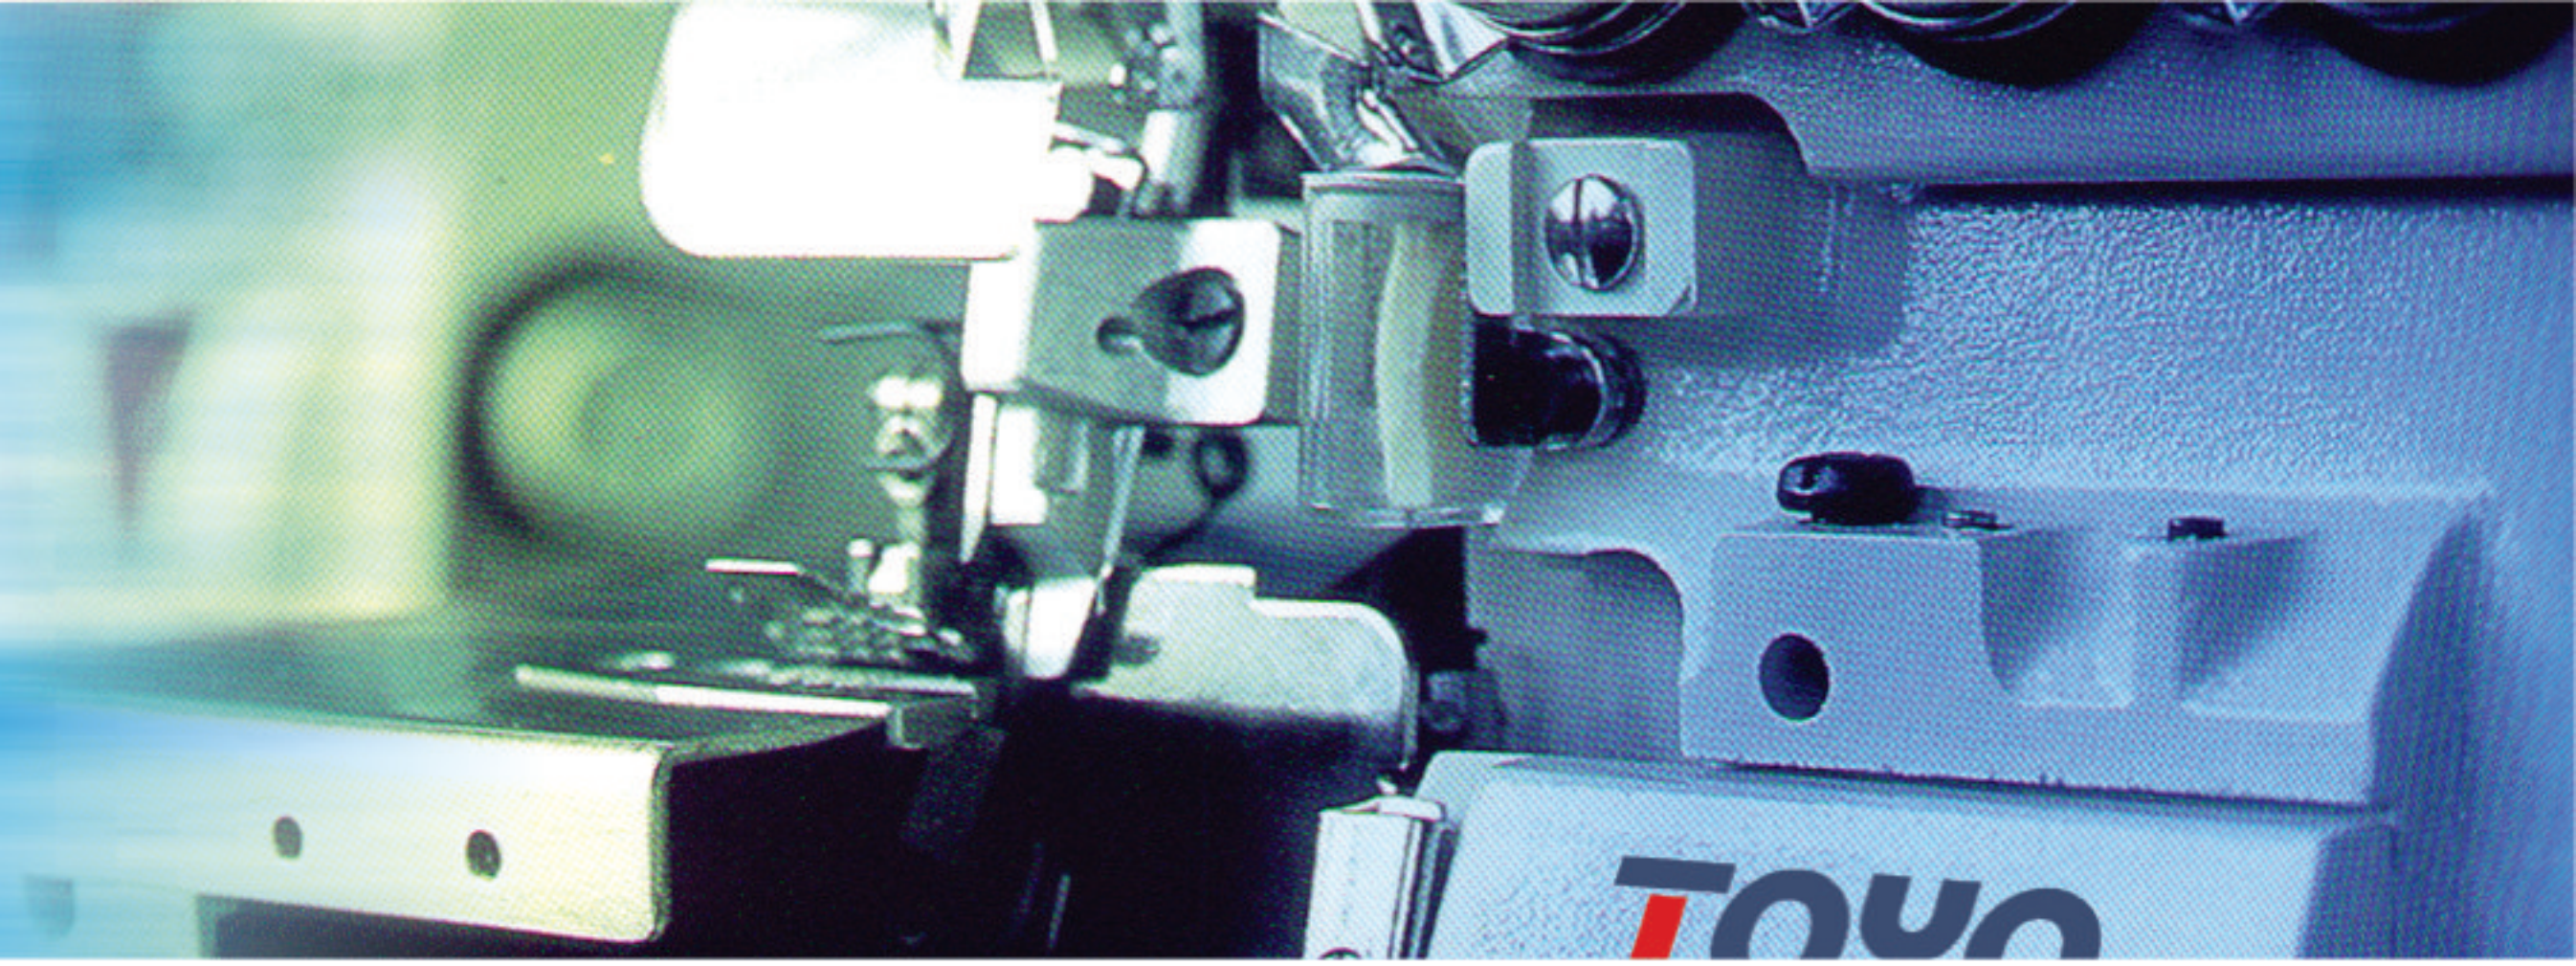





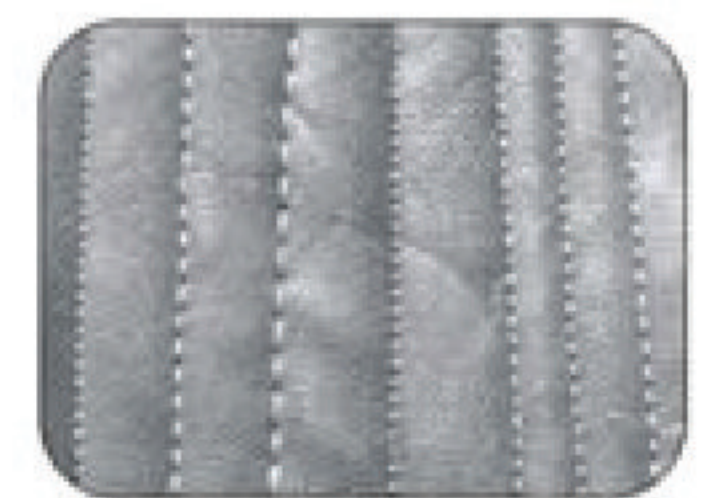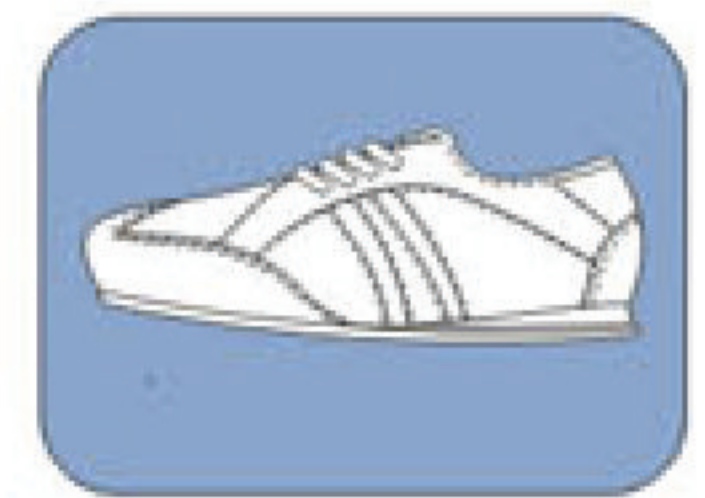


TY-591-D3

SINGLE NEEDLE POST-BED TOP & BOTTOM ROLLER FEED MACHINE WITH BACK TACKING UNDER BED THREAD TRIMMING & AUTO PRESSURE FOOT LIFTING.




FEATURES

- This machine works with upper roller, lower wheel and synchronized needle feeding ensuring smooth sewing at all times.
- Even when joining together other material for overlap sewing.
- Needle feed ensures constantly supply of thin and thick material, no matter it moves straight forward or makes turns.
- Low friction between the parts because ball & needle bearing are used, easy maintenance and long service life.
- The round body casting reduces shaking during stitching, suitable for sports shoes, leather shoes, even the spongy materials.

						
TY-591-D3	2500 s.p.m	11~21#	8mm	8-13mm	41mm	-

Specifications subject to change without notice.



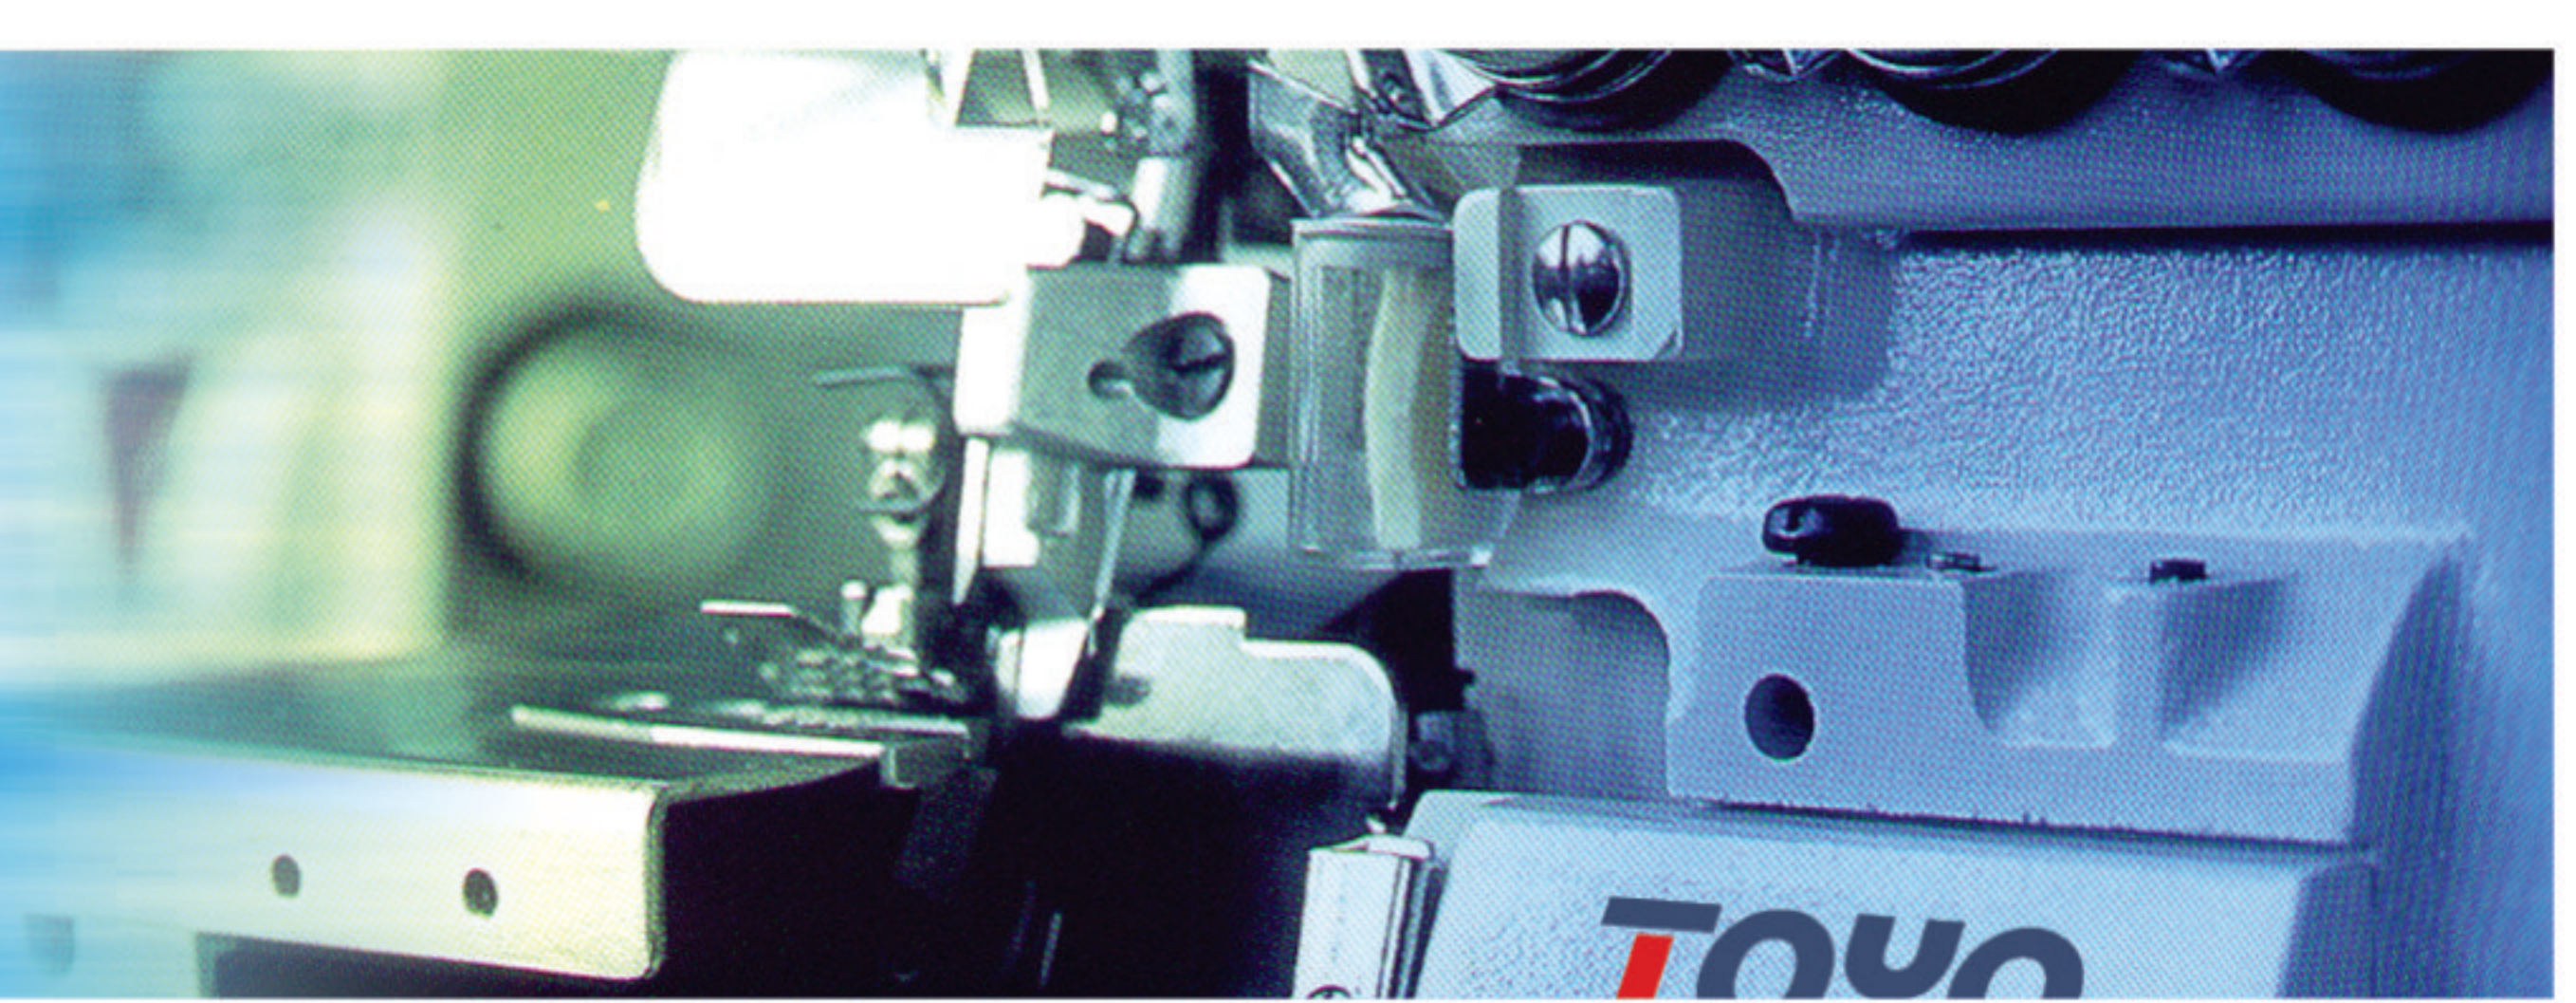








TY-592-D3

DOUBLE NEEDLE POST-BED TOP & BOTTOM ROLLER FEED MACHINE WITH BACK TACKING UNDER BED THREAD TRIMMING & AUTO PRESSURE FOOT LIFTING.




FEATURES

- This machine works with upper roller, lower wheel and synchronized needle feeding ensuring smooth sewing at all times.
- Even when joining together other material for overlap sewing.
- Needle feed ensures constantly supply of thin and thick material, no matter it moves straight forward or makes turns.
- Low friction between the parts because ball & needle bearing are used, easy maintenance and long service life.
- The round body casting reduces shaking during stitching, suitable for sports shoes, leather shoes, even the spongy materials.

						
TY-592-D3	2500 s.p.m	11~21#	4mm	8-13mm	41mm	1.6/2.0/2.4/2.8/3.2



Specifications subject to change without notice.



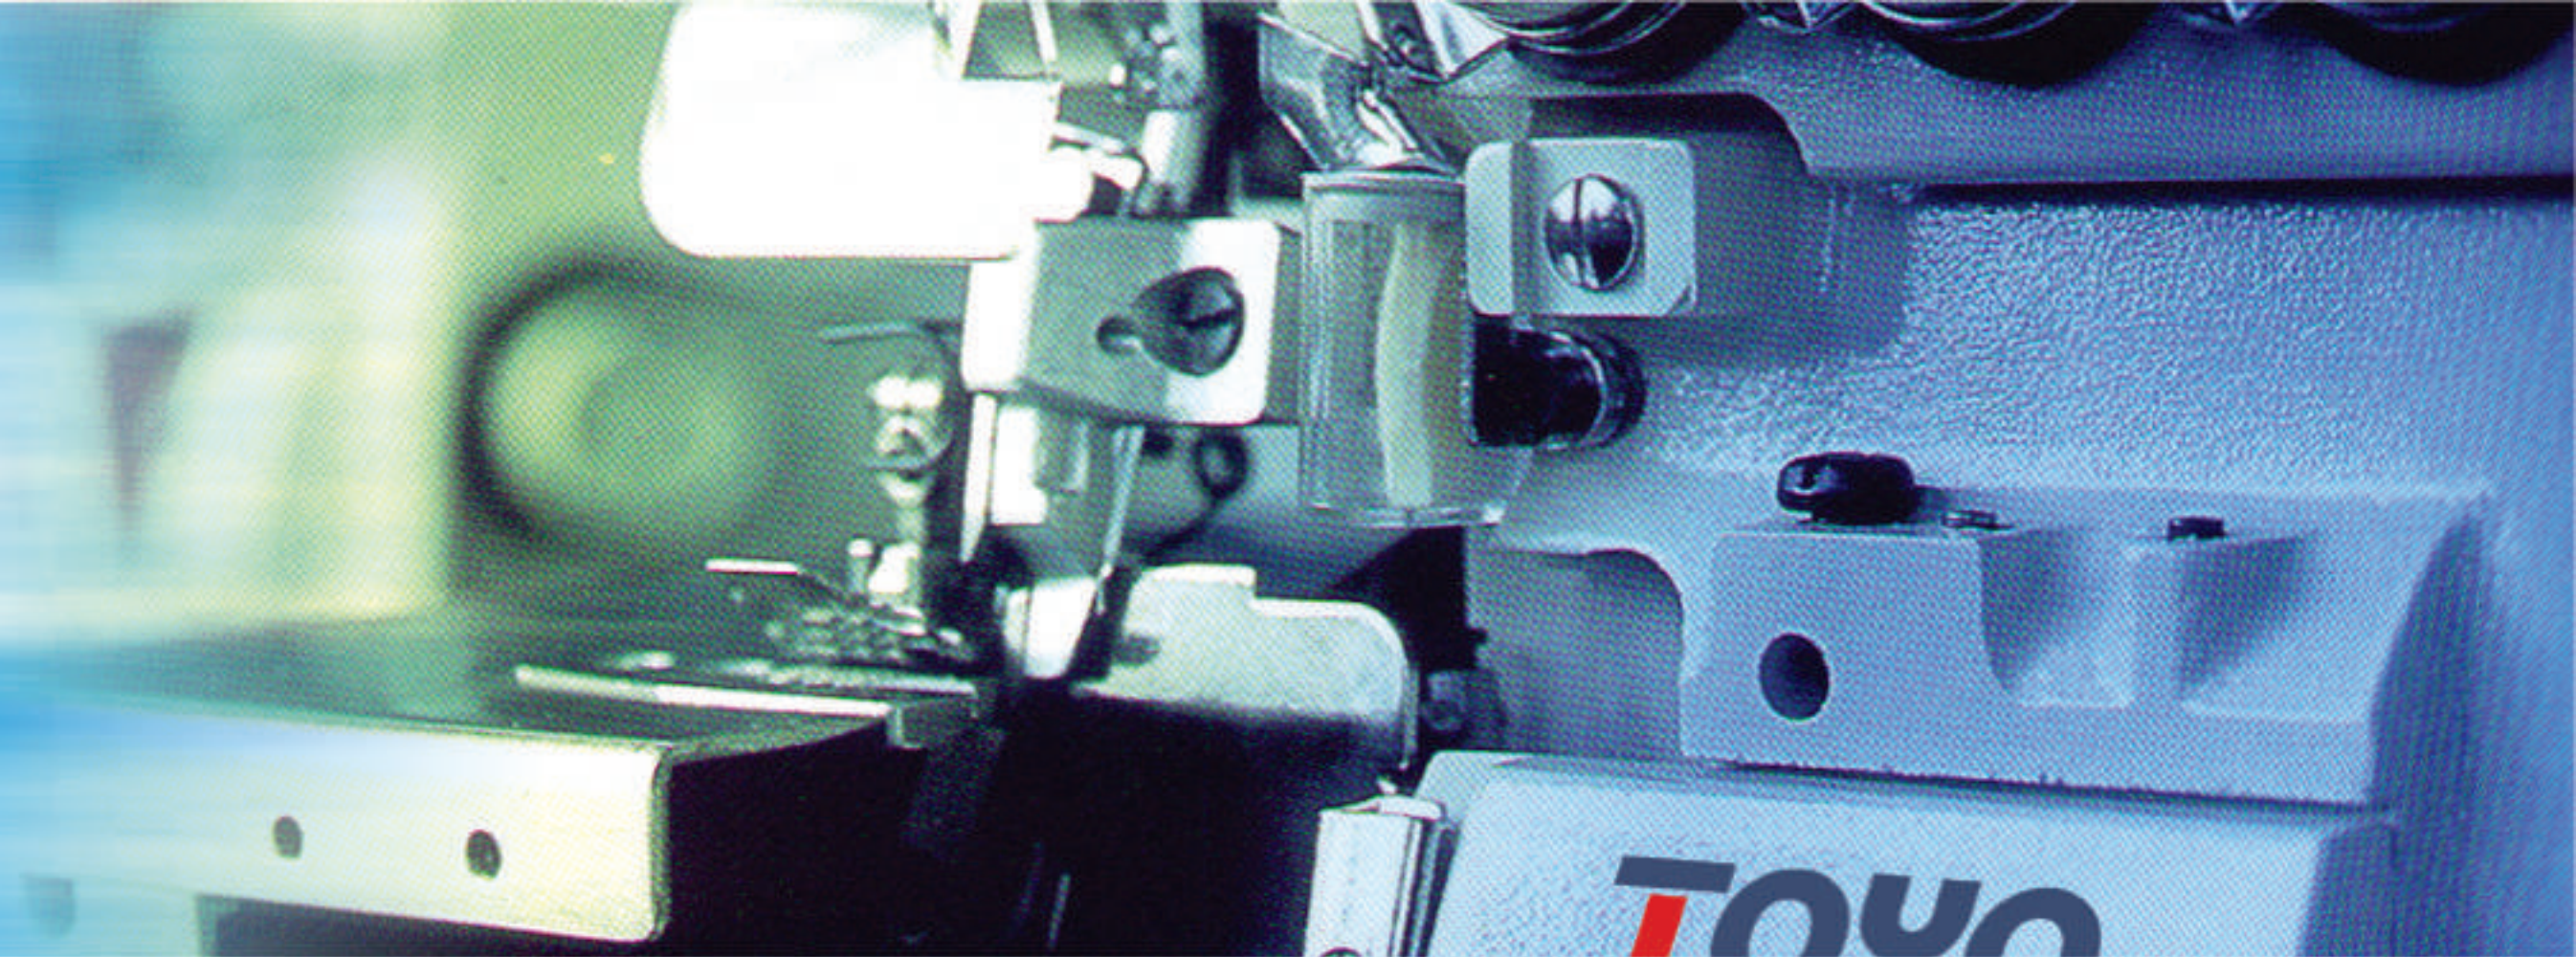





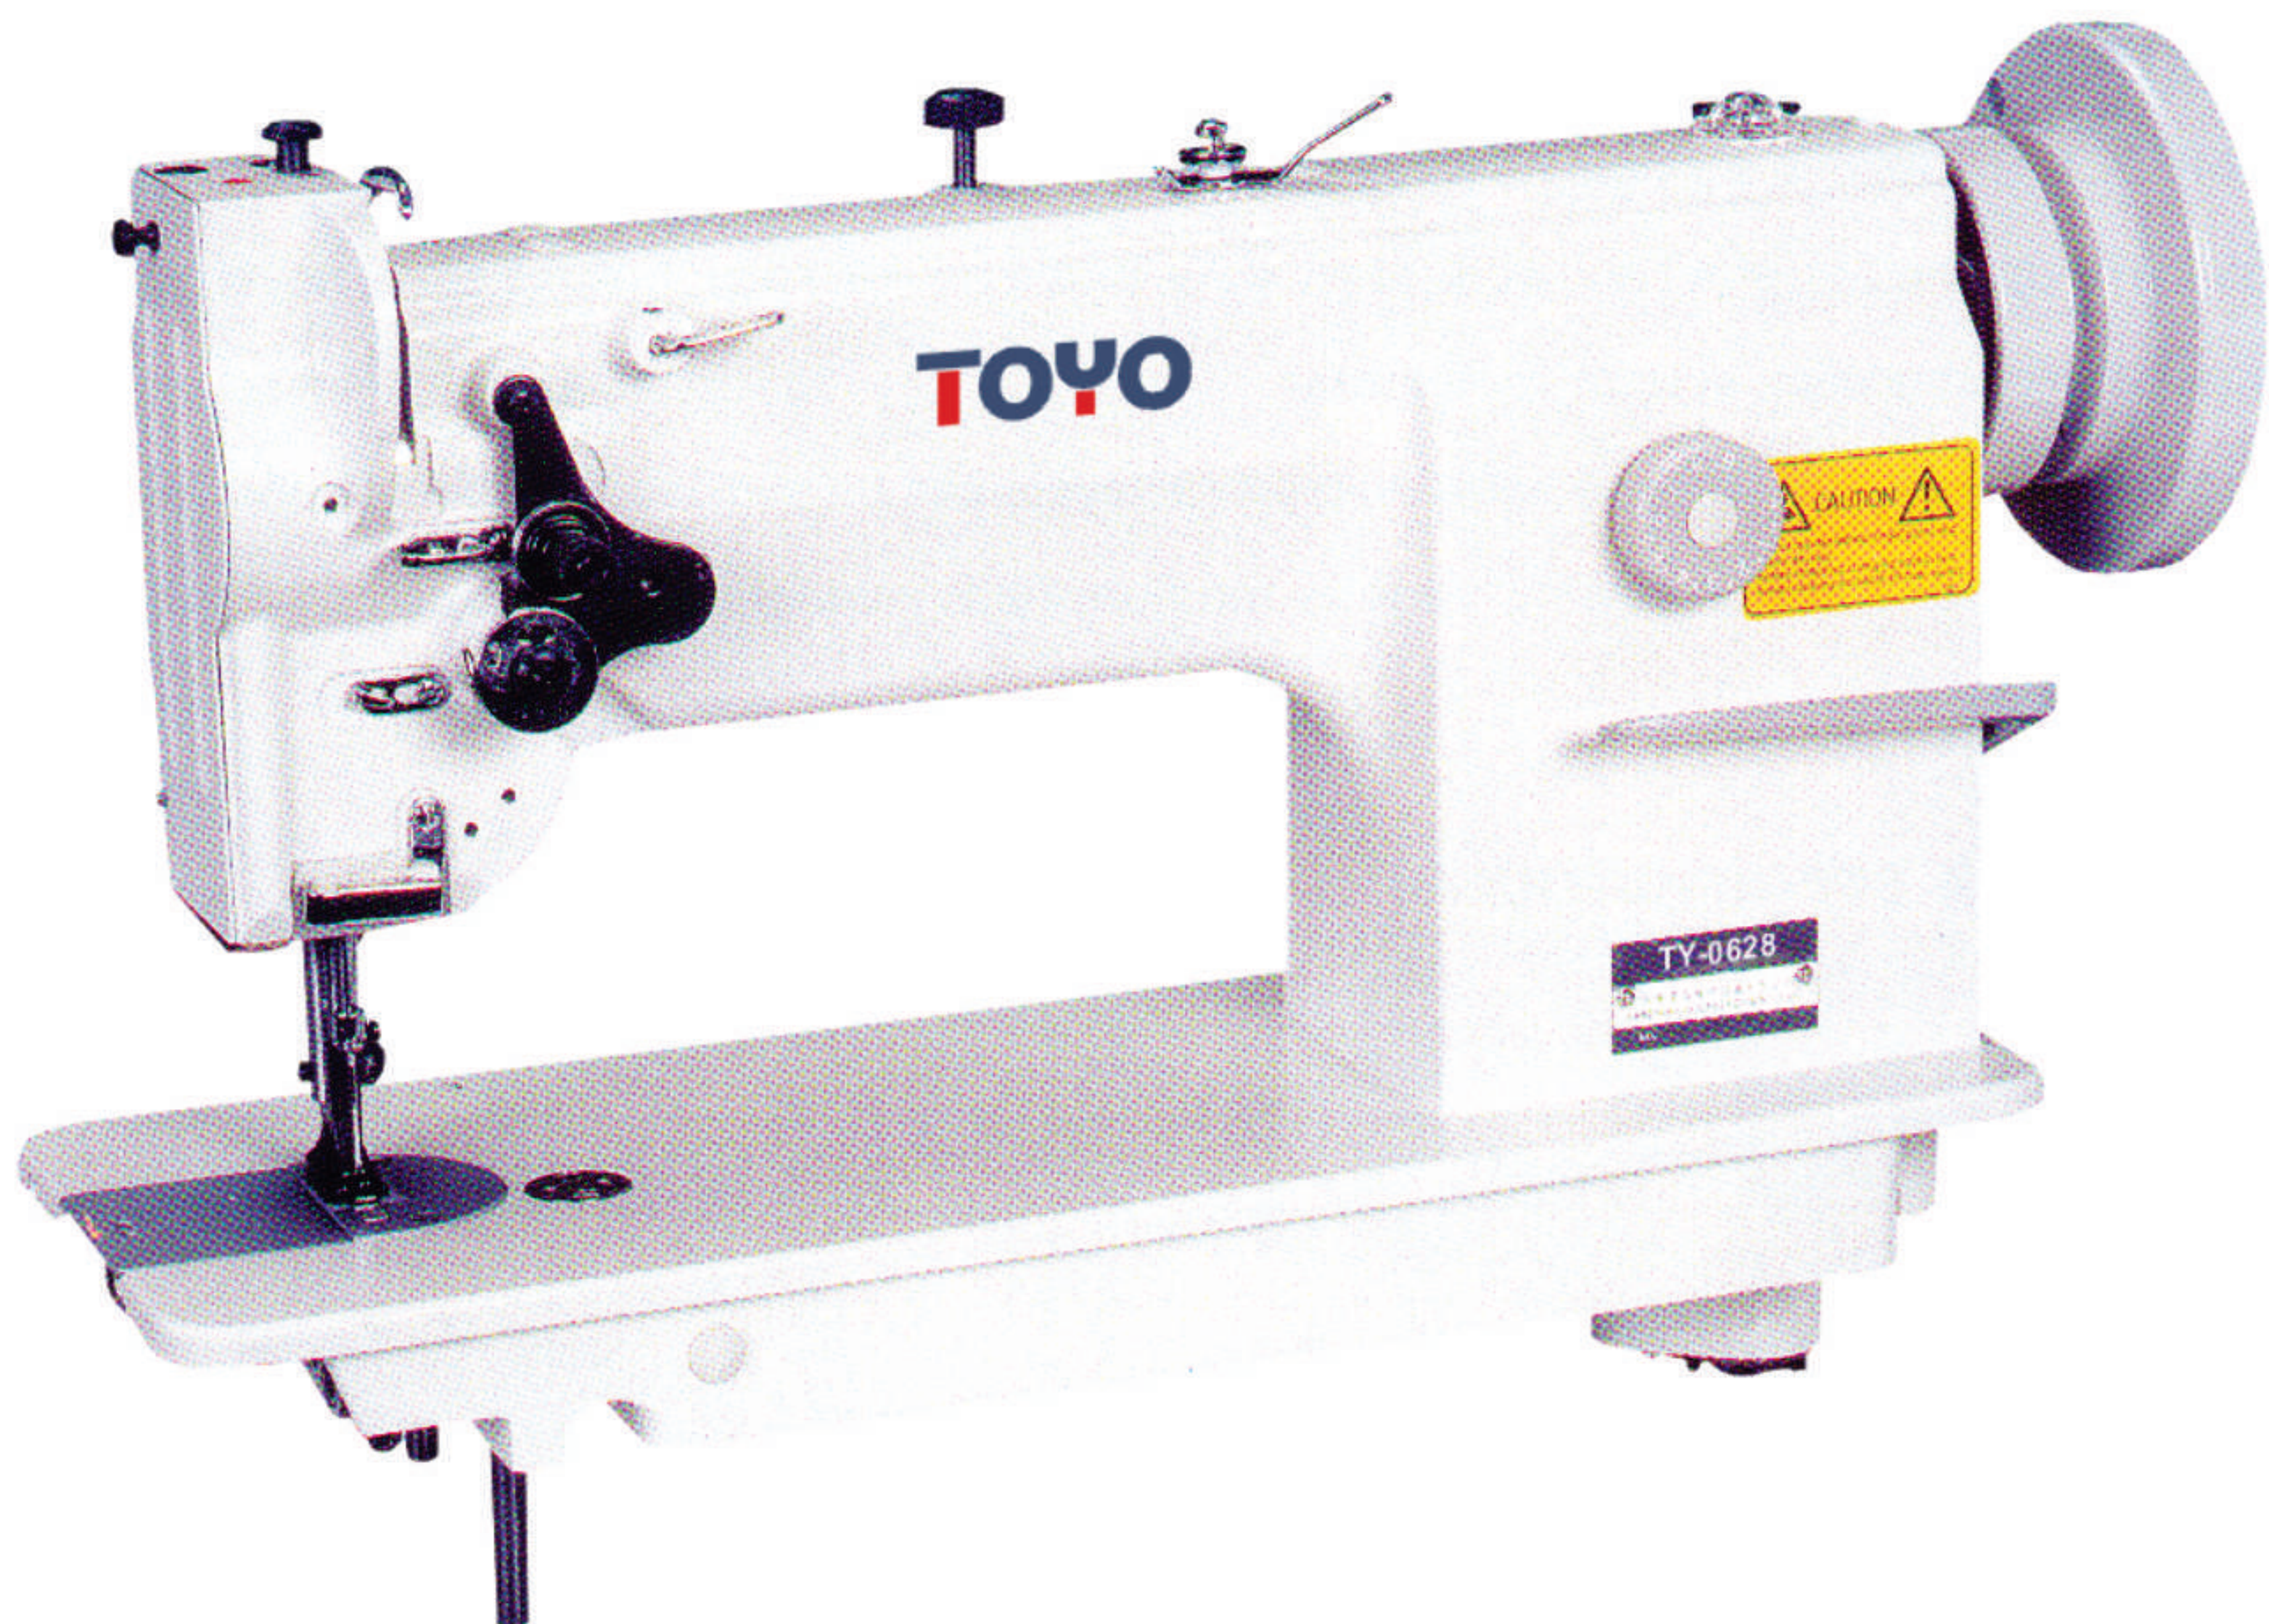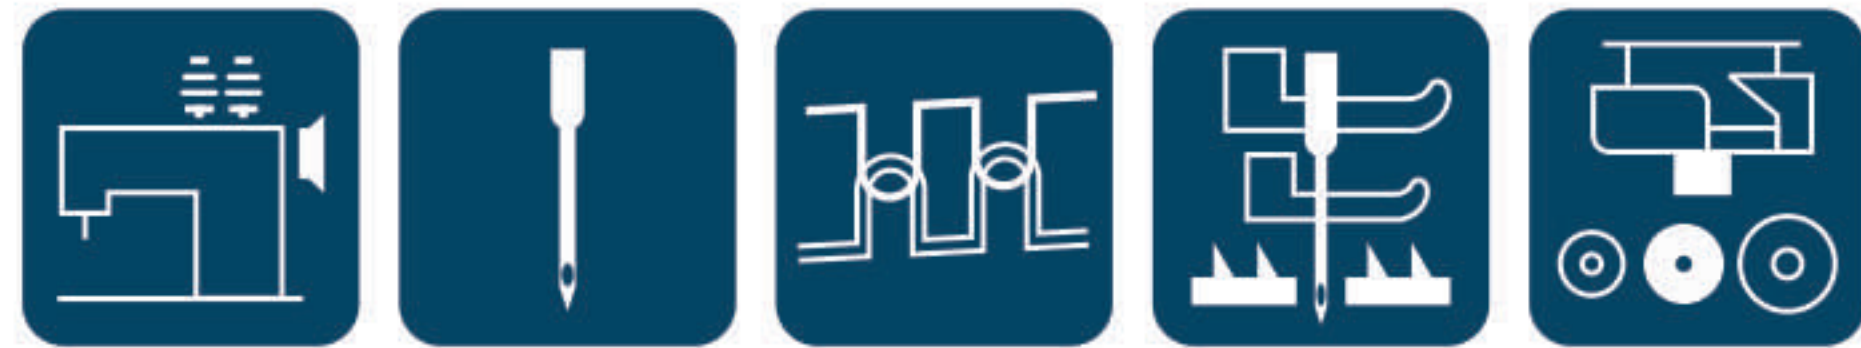







TY-0628

SINGLE NEEDLE FLATBED SEWING MACHINE




FEATURES

- The machine adopts sliding bar thread take-up, the arm shaft and hook shaft transfer the device by high-precise spiral bevel gear.
- Automatic lubricating system, smooth & quiet running and easy maintenance.
- Running noises and vibrations are minimized significantly.
- As the compound feed, the slippage between material layers can be avoided with beauty and uniform stitches.
- This machine is ideally suited for sewing various medium-heavy weight fabrics.

 Model	 Max.Sewing Speed	 Needle System	 Needle Bar Stroke	 Stitch Length	 Presser Foot Lift		 Sewing Material	 Motor	 Rotary Hook	 Packing Size L.W.H	 GW/NW
					Hand	Knee					
TY-0628	2000 s.p.m	DP x 17 #18 ~ #25	33.2 mm	9 mm	8 mm	15 mm	Medium Heavy	370 w		580x254x530	35/30 kg

Specifications subject to change without notice.



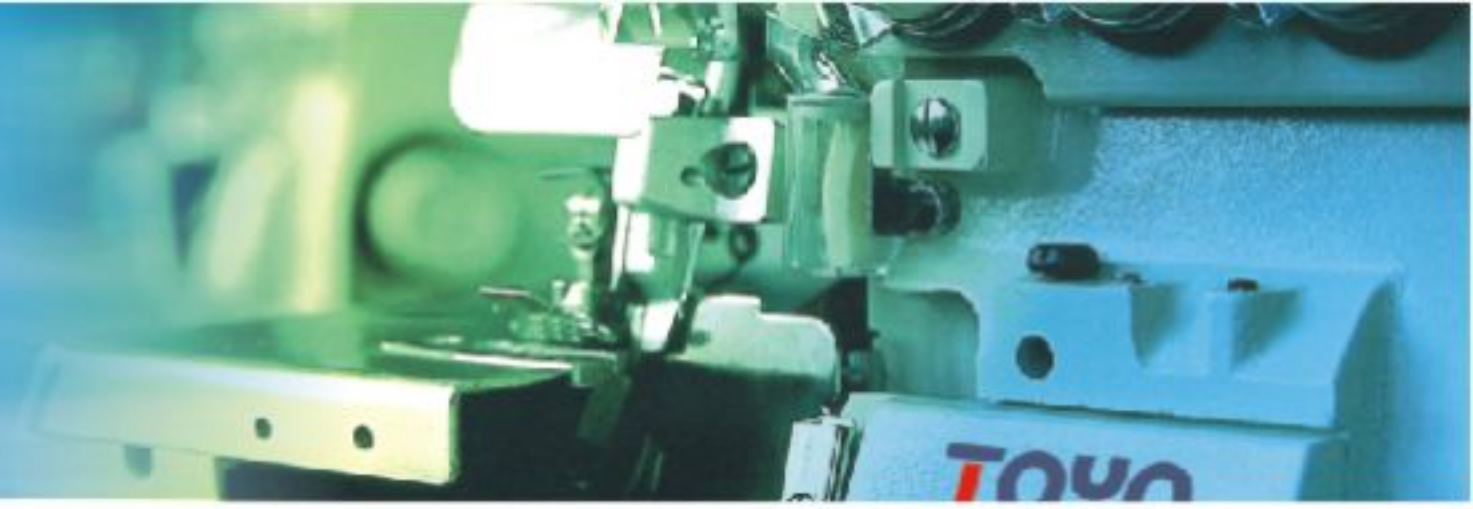

TY-737 TY-747 TY-757

OVERLOCK SEWING MACHINE




FEATURES

- Excellent automatic lubricating and filtering (interchangeable) system, ensures the maximum sewing speed is up to 6,000 s.p.m.
- The super-speed overlock machine is with the latest technology and excellent performance.
- High-preciseness and stability assures a high-quality stitch.
- Available to combine with different kinds of attachment and automatic device.
- Micro-adjustable and lever-adjustable differential feeding ratio.
- Various sub-class models with different kinds of attachments are available for different applications.
- These machines are ideally suited for various garments & knitted materials such as under-garments, sport-wears, T-shirts, shorts, etc.

Model	Max Sewing Speed	Needle System	No. of Needle	No. of Threads	Stitch Length	Ratio	Presser Foot Lift	Needle Gauge	Packing Size L.W.H	GW/NW
TY-737	6000 s.p.m	DC x 27 #11 ~ #14	1	3	4 mm	0.7 : 2	5.5 mm	-	470x330x485	34 kg
TY-747	6000 s.p.m	DC x 27 #11 ~ #14	2	4	4 mm	0.7 : 2	6 mm	2	470x330x485	34 kg
TY-757	6000 s.p.m	DC x 27 DM x 13 #11 ~ #14	2	5	5 mm	0.7 : 2	6 mm	3	470x330x485	34 kg

Specifications subject to change without notice.



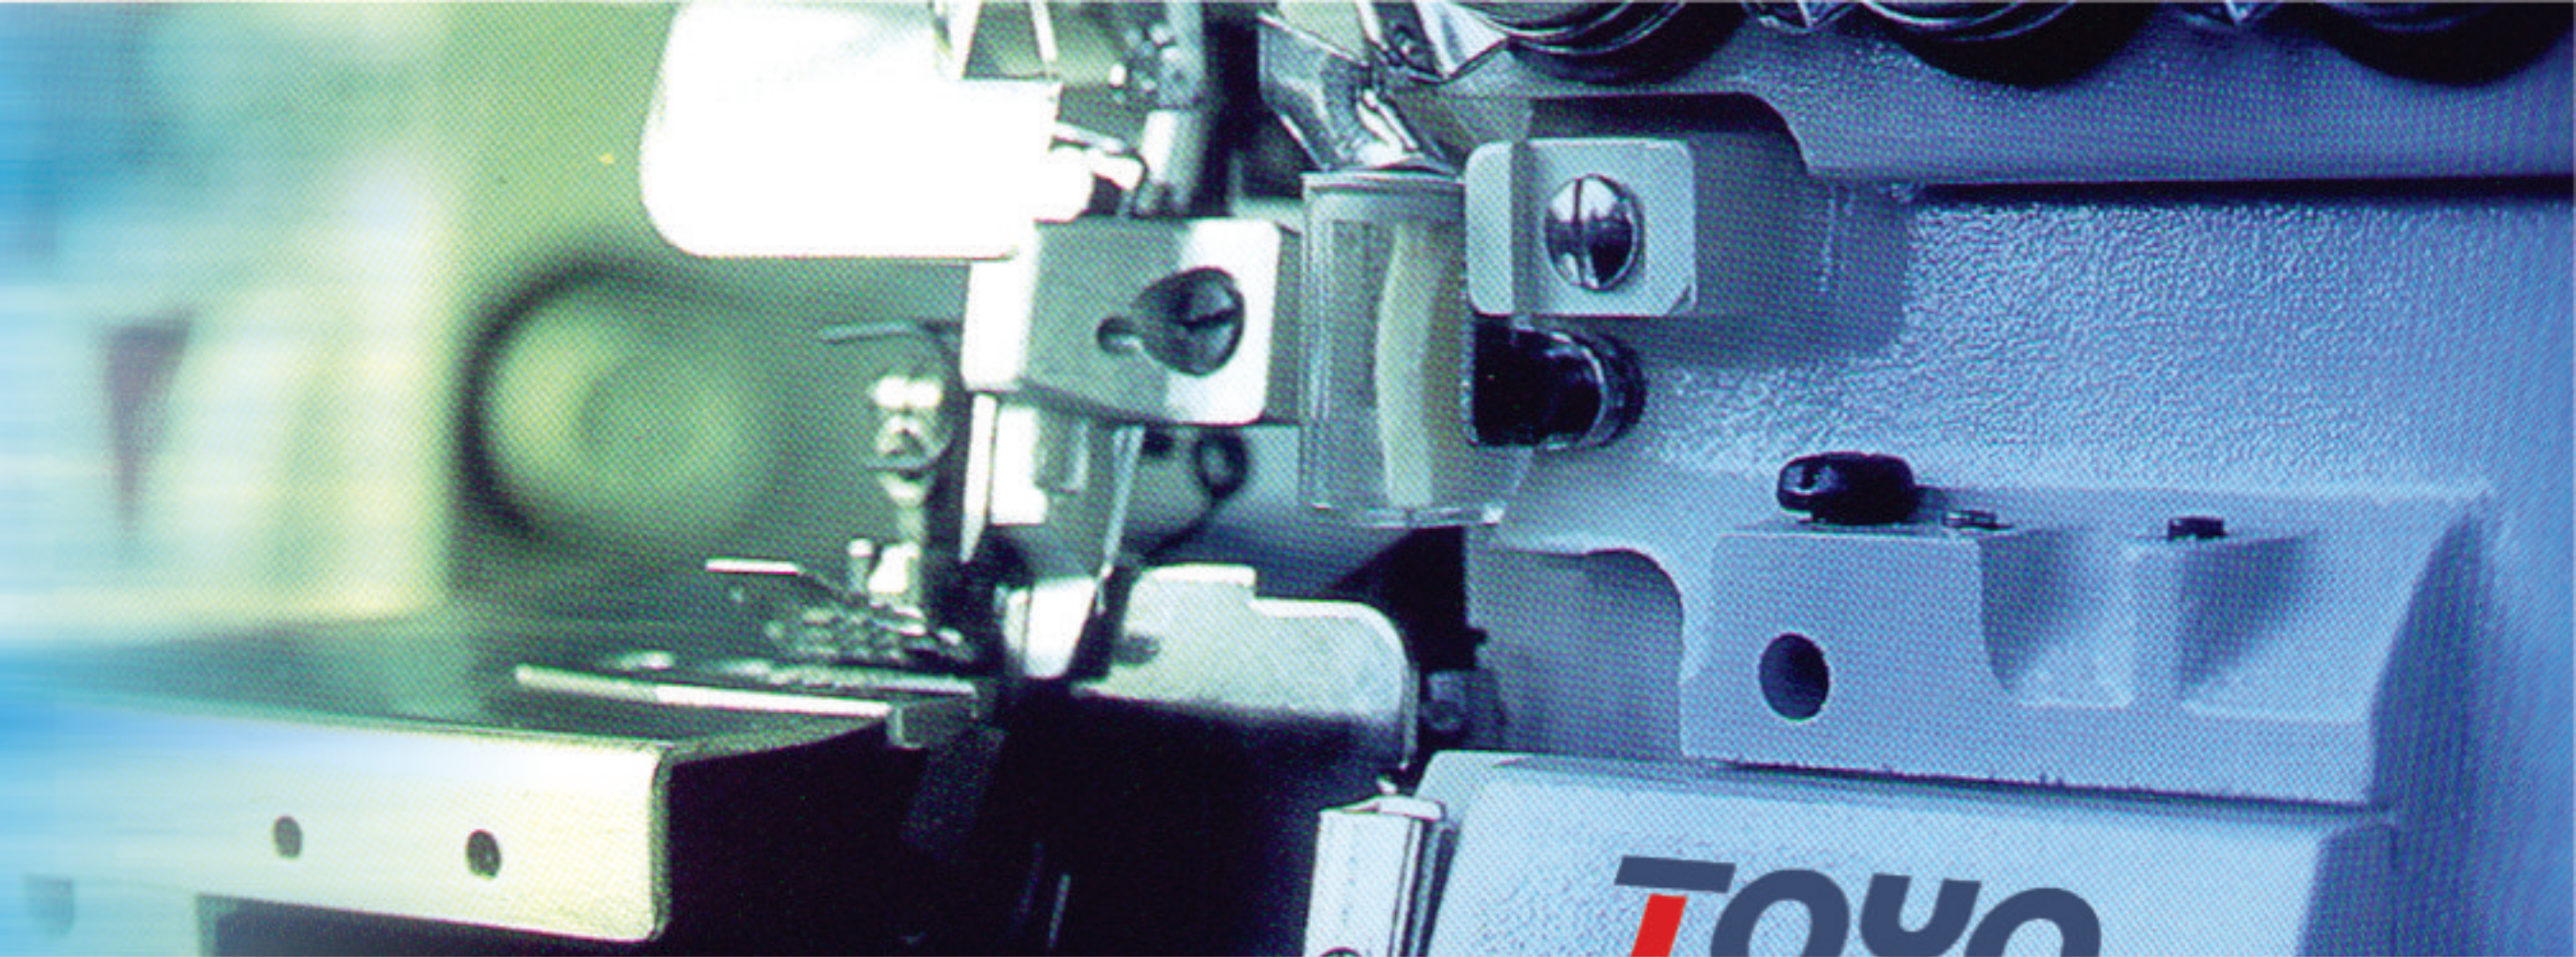













TY-781D

DIRECT DRIVE LOCK STITCH BUTTON HOLE MACHINE COMPLETE SET




FEATURES

- The lift of the work clamp has been greatly increased so that heavy-weight materials may be sewn easily.
- The improved throat plate base, tension release cam and feed cam will provide still better button-holing finish.
- The improved lifting lever which moves smoothly will greatly reduce operator's fatigue.
- The change in the button-holing size can easily be met by the use of exchangeable gauge.
- The improved bobbin thread winding & the fully automatic lubricating system.
- The number of stitches can be set at any value between 54 and 345 simply by changing the spur gears.
- The machine for purl stitching is equipped with a device for preventing the bobbin from running idle.
- The safety device to prevent knife from being dropped in case of needle thread breakage.
- The specially designed mechanisms could provide the perfect buttonholing stitches even at the high speed operation.
- These machine are ideally suited for button-holing on ordinary or knitted material with light or heavy weight, etc.

 Model	 Max.Sewing Speed	 Needle System	 Needle Bar Stroke	 Stitch Length	 Presser Foot Lift	 Sewing Material	 Motor	 Rotary Hook	 Packing Size L.W.H	 GW/ NW
TY-781D	3600 s.p.m	DB x 5 #14	34.6 mm	6.4-19 mm	12 mm	Medium Heavy	370 w		745x340x930	69/58 kg

Specifications subject to change without notice.



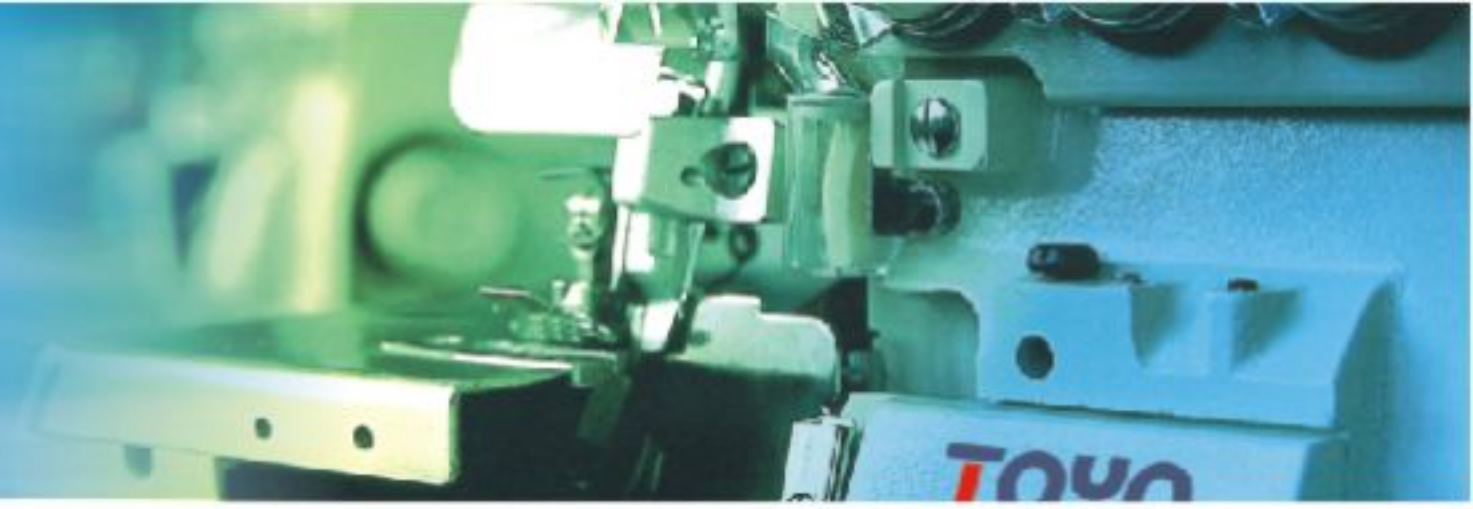


TY-801

SKIVING MACHINE




FEATURES

- With advanced technique and precise parts, high precision and durability, operate easily and safety.
- Maximum width of plain skiving is 50 mm, the designated width could be obtained by skiving some more times.
- With a waste releasing device & knife grinding clutch set, easy operation.
- Convenience for changing parts, easy maintenance.
- This machine is ideally suited for edge skiving and whole surface skiving of any kinds of leather as well as vinyl and rubber for shoes, bags, belts, gloves, wallets, etc.

 Model	 Max. Speed	 Max. Skiving Width	 Motor	 Packing Size L.W.H	 GW/NW
TY-801	1200 r.p.m	50 mm	370 w	580 x 390 x 410 mm	40 / 37 kg

Specifications subject to change without notice.



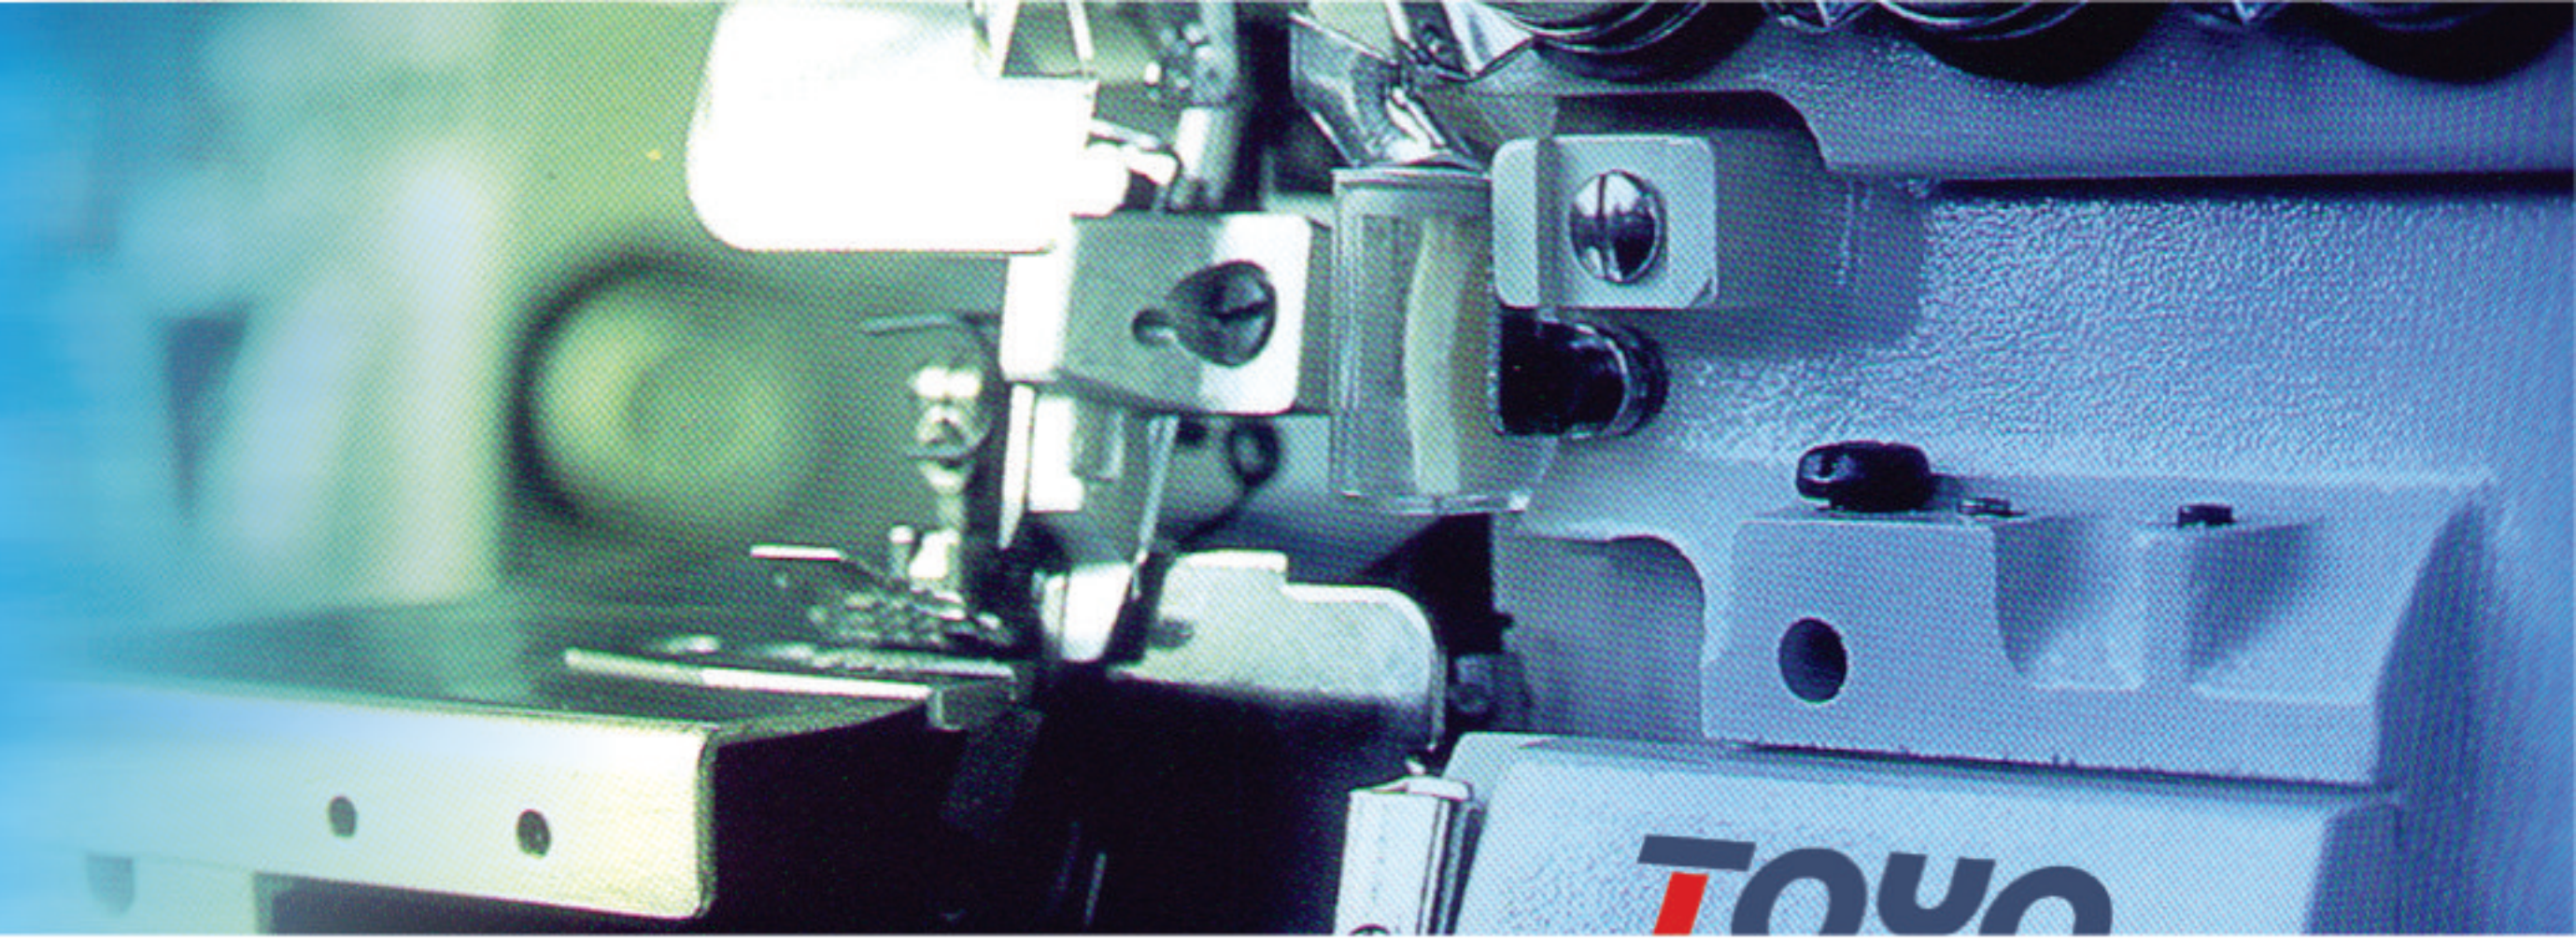

TY-810

TY-820

(DOUBLE NEEDLE)

SINGLE NEEDLE POSTBED SEWING MACHINE




FEATURES

- Easy guiding of work when sewing on closed shoe uppers, e.g. children's, because the post is arranged to the right of the needle.
- Excellent sewing effects and first class quality thank to vertical rotating hook and link take-up lever.
- Easily adjustable stitch length variation.
- Backtacking only with gentle press on the backtacking bar, convenient operation.
- Lock stitch with drop feed can promise a smooth sewing quality on either thin or thick materials.
- Changed the roller presser foot accessories into the flat presser foot accessories, could stitch the cap and wig.
- These machines are ideally suited for sewing sports shoes, lady shoes, jackboots, bags, etc.

Model	Max.Sewing Speed	Needle System	Needle Bar Stroke	Stitch Length	Presser Foot Lift		Sewing Material	Motor	Rotary Hook	Packing Size L.W.H	GW/NW
					Hand	Knee					
TY-810	2500 s.p.m	DP x 5	38 mm	4 mm	5 mm	9 mm	Medium Heavy	370 w		675x300x599	44/38 kg
TY-820	2500 s.p.m	DP x 5	38 mm	4 mm	5 mm	9 mm	Medium Heavy	370 w		675x300x599	44/38 kg

Specifications subject to change without notice.



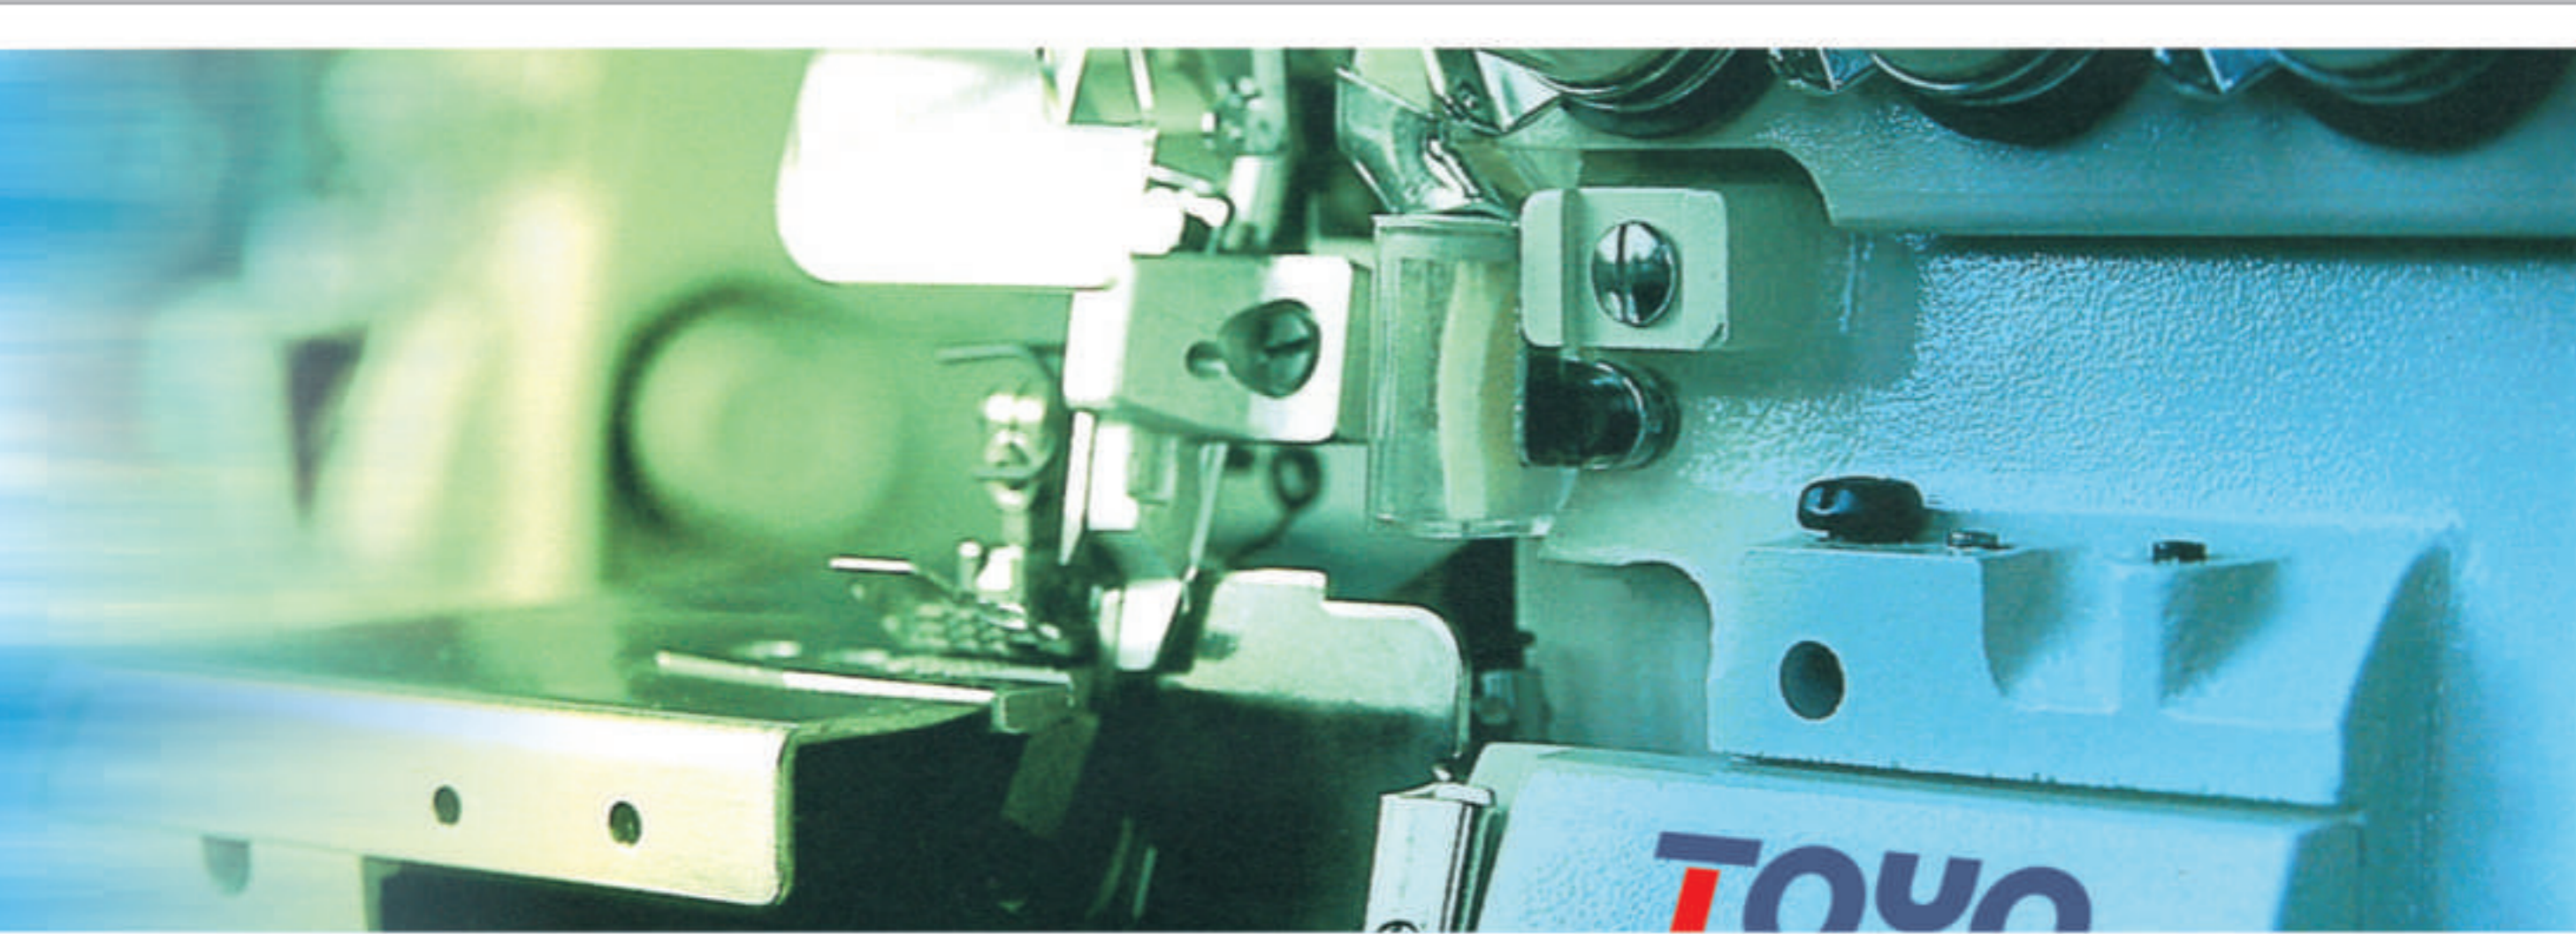

TY-818D-A

SNAP FASTNERS FIXING AND EYELETING RIVETING MACHINE WITH DIRECT DRIVE




FEATURES

Model:	TY-818D-A
Volt.:	220V/50HZ
Pressure:	0.4-0.6Mpa
Power:	550W
Motor Speed:	4500RPM
Punching Speed	60 Time /Min
Packing Size:	460x350x195mm
N.W./G.W:	15/17 kgs

Specifications subject to change without notice.



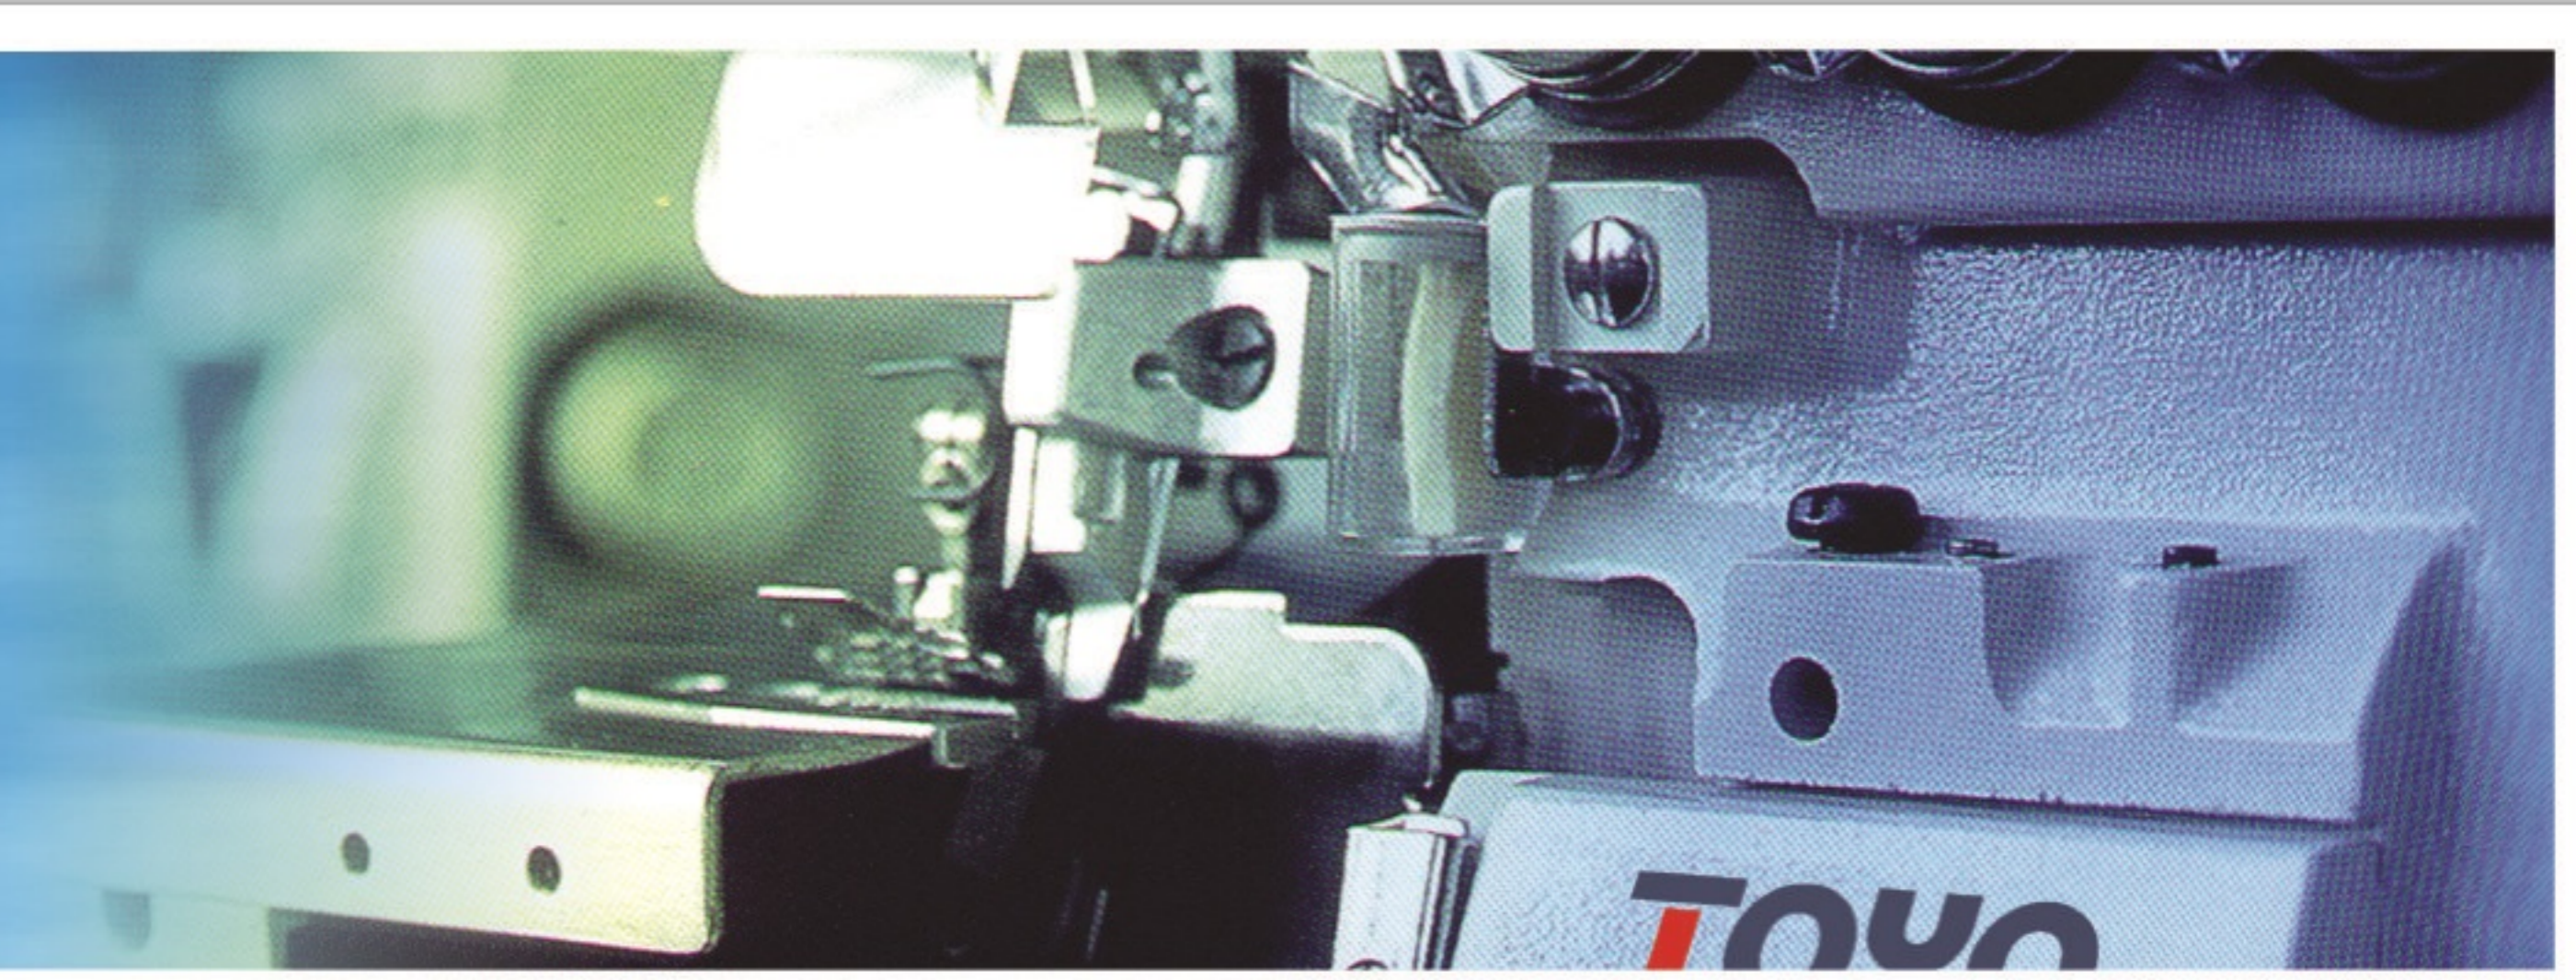




TY-872D

TOYO DOUBLE NEEDLE FLATBED LOCKSTITCH SEWING MACHINE WITH DIRECT DRIVE (LARGE HOOK)




FEATURES

- Applied with the newly improved main shaft mechanism, ensured further durability. super work space, adopted advanced feeding mechanism, prevented leaping in high-speed at lower tension, upgrading the efficiency. Beautiful appearance. easily operation. Lower noise, without radiation. Suitable for light , medium, heavy of garment sewing.

											
TY-872D	DPX5 16-22#	2	7/32" 3/8"	2	0-5	7-13	3000	★	-	675X310X660	43/48

Specifications subject to change without notice.



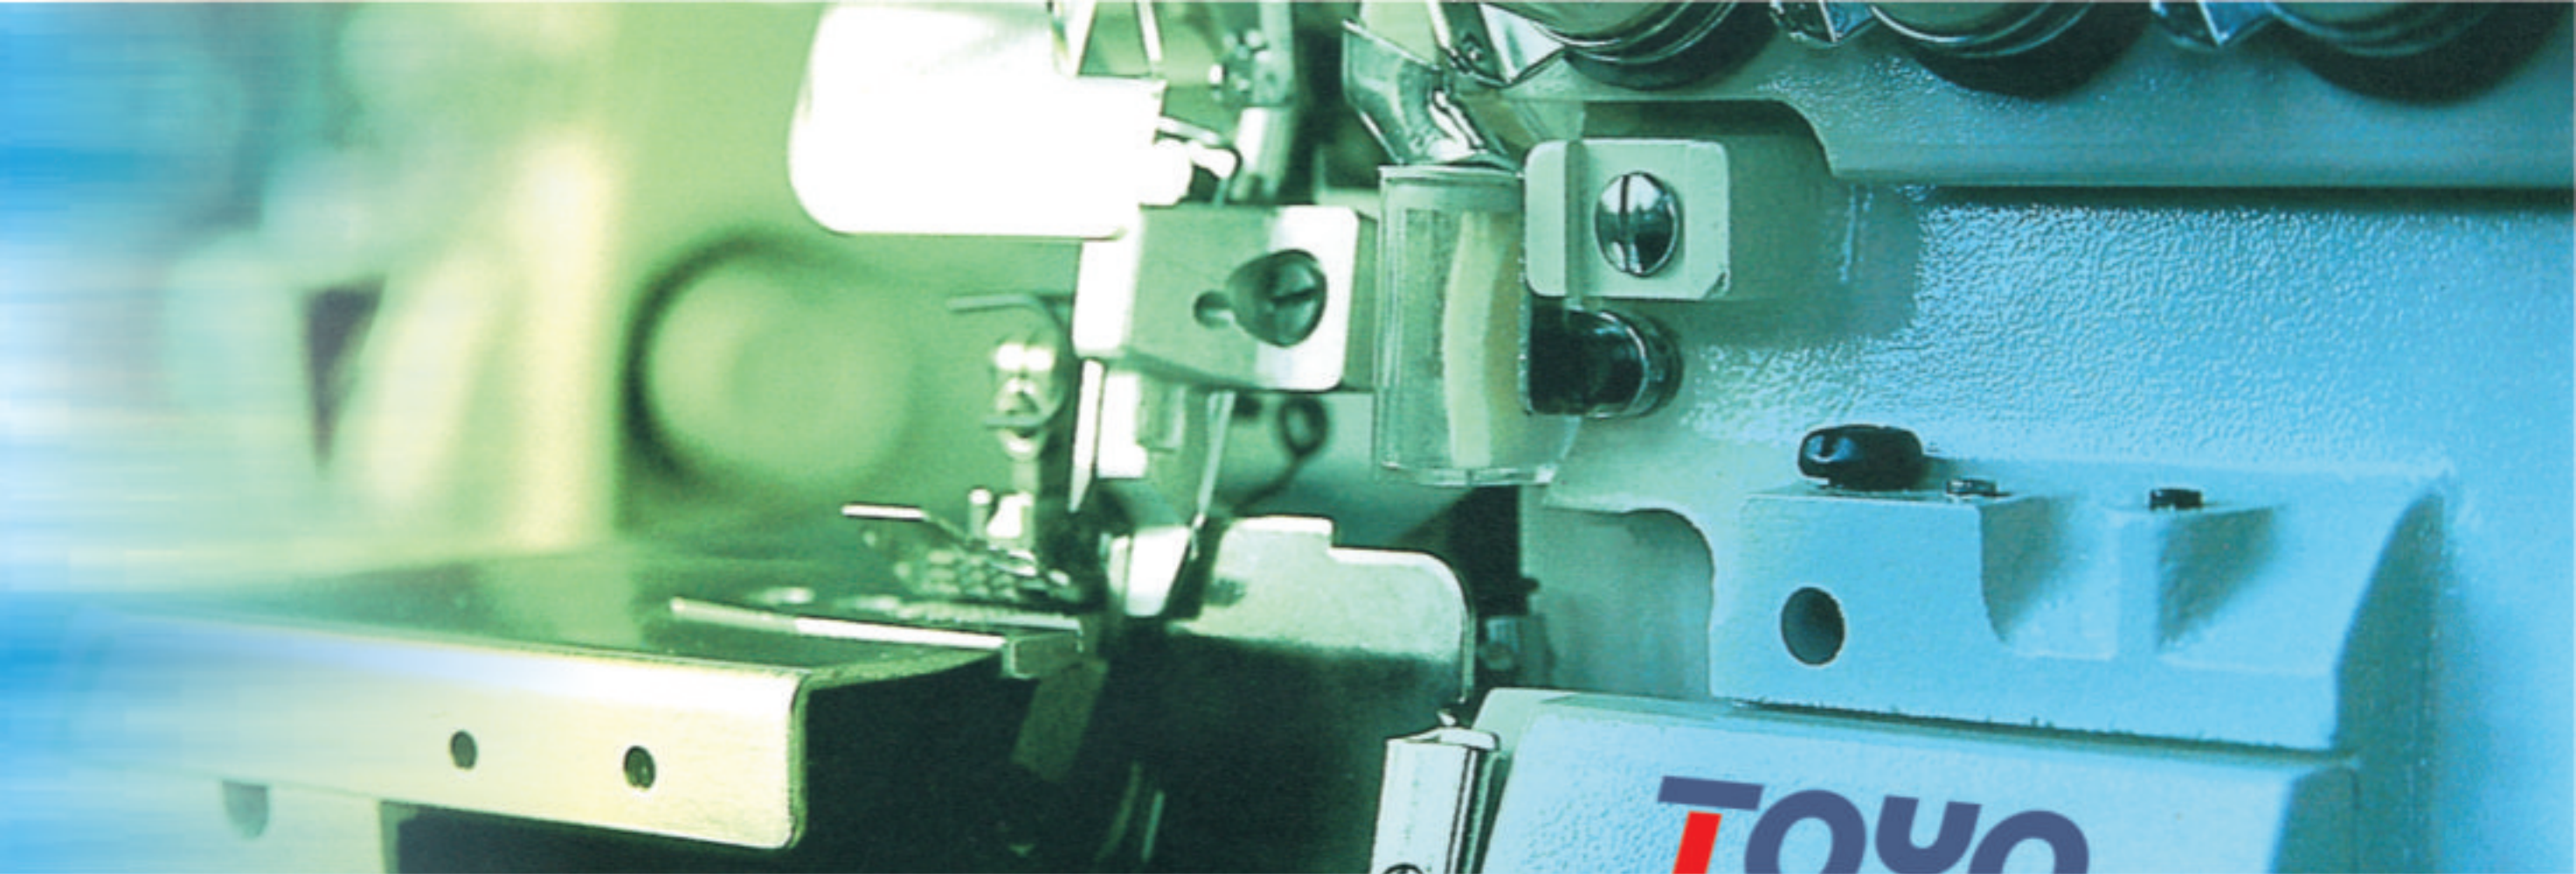





TY-900 Series

MULTIHEAD COMPUTERISED EMBROIDERY MACHINE



FEATURES

- Mainshaft Motor : Chinese Micro, and Silent Motor : Standard (3-phase stepping motor)
- Embroidery Area : X-Direction : 135-1200mm, Y-Direction : <1200 mm
- Computer Options : 5" Black & White screen, 5" Color screen, 10" Color screen
- These machines are ideally suited for flat embroidery, shirts embroidery, other garments embroidery, etc.


Model	 Max.Sewing Speed	 Stitch Length	Head	 No. of Needle	Head Interval	Memory Capacity	 Power Source
TY-904A TY-904M	250 ~ 1000 r.p.m.	0.1 ~ 12.7 mm	4	9 (6)	400 mm	500,000 stitches	3-Phase, 220v/380v (50Hz/60Hz) Single-Phase, 110v/220v (50Hz/60Hz)
TY-906A TY-906M			6	9 (6)	400 mm		
TY-908A TY-908M			8	9 (6)	400 mm		
TY-910A TY-910M			10	9 (6)	400 mm		
TY-912A TY-912M			12	9 (6)	300 mm		
TY-915A TY-915M			15	9 (6)	300 mm		
TY-918A TY-918M			18	9 (6)	275 mm		
TY-920A TY-920M			20	9 (6)	275 mm		
TY-C901A TY-C901M			1	9	400 mm		
TY-C902A TY-C902M			2	9	400 mm		
TY-C904A TY-C904M			4	9	400 mm		
TY-C906A TY-C906M			6	9	400 mm		
TY-C912A TY-C912M			12	9	400 mm		
TY-S906A			6	9 (6)	400 mm		

Specifications subject to change without notice.





TOYO

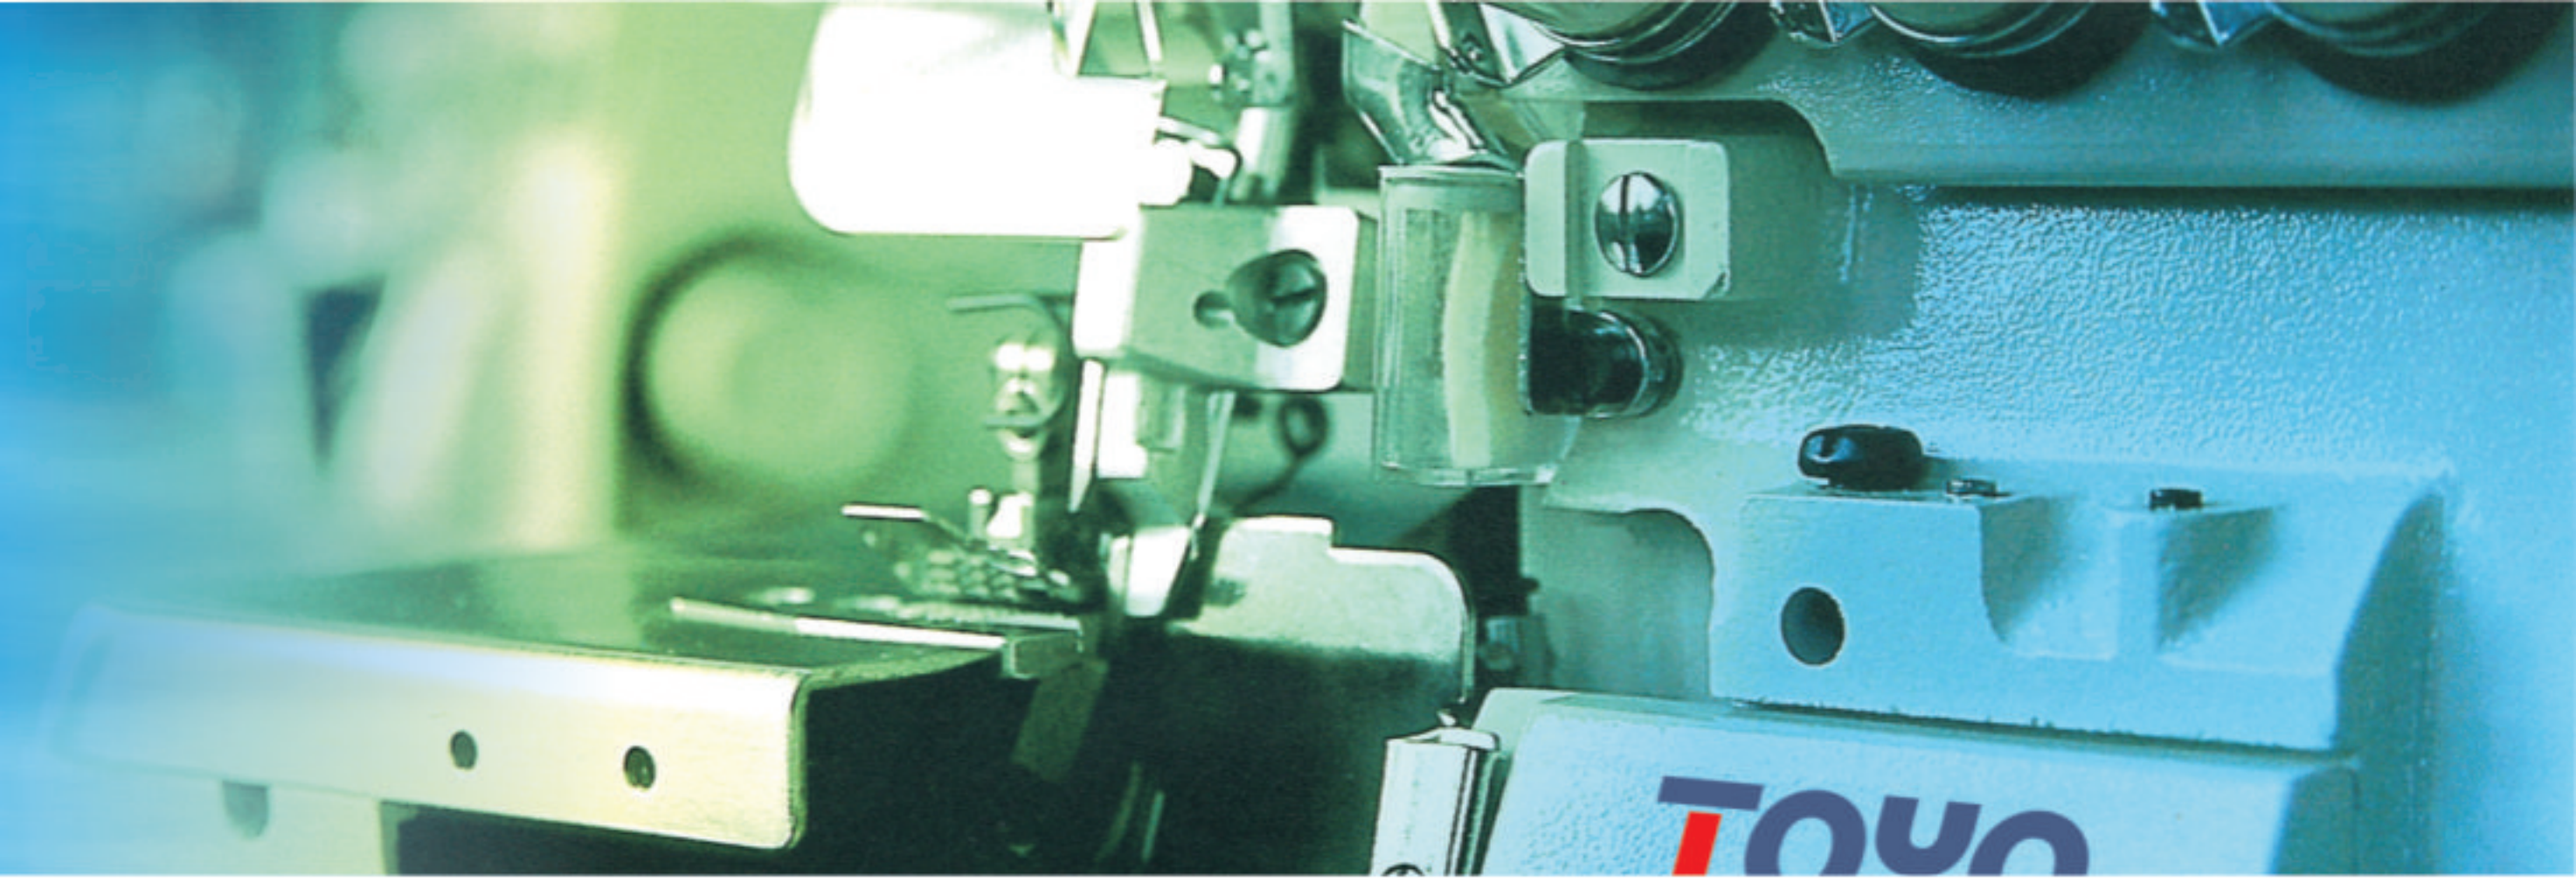

TY-1130BL

SINGLE NEEDLE HIGHSPEED LOCK STITCH MACHINE

TY-1130

(STANDARD HOOK)




FEATURES

- Applied with the newly designed sewing mechanisms in order to achieve the low-tension sewing, the machine flexibly responds to various kinds of materials and produces beautiful seams of consistent quality. No matter in high-speed or low-speed operation, the machine could obtain best stitches.
- The best design technology created the optimum balance and highly rigid machine head, could reduce the vibration and noise. The machine could provide the operator with a comfortable work environment.
- The lift of the presser foot is 13mm, easy for in and out of the sewing products and easy operate, could increase working efficiency.
- Automatic lubricating system, smooth and quiet running, easy maintenance and increase the durability of the machine.
- By graduation dial, easy adjustment of stitch length can be obtained.
- Reverse feed by simple lever operation.
- These machines are ideally suited for sewing heavy materials of leather, knit, cotton, wool, denim & synthetic materials etc. such as shoes, bags, leather goods, leather garments & textile made-ups, etc.

Model	Max.Sewing Speed	Needle System	Needle Bar Stroke	Stitch Length	Presser Foot Lift		Sewing Material	Motor	Rotary Hook	Packing Size L.W.H	GW/NW
					Hand	Knee					
TY-1130BL	3500 s.p.m	DP x 5 #18 ~ #24	35 mm	0-7 mm	7 mm	13 mm	Heavy	370 w		580x250x530	33/28 kg
TY-1130	5000 s.p.m	DB x 1 #14 ~ #22	31.8 mm	0-5 mm	6 mm	13 mm	Medium Heavy	370 w		580x250x530	33/28 kg



Specifications subject to change without notice.



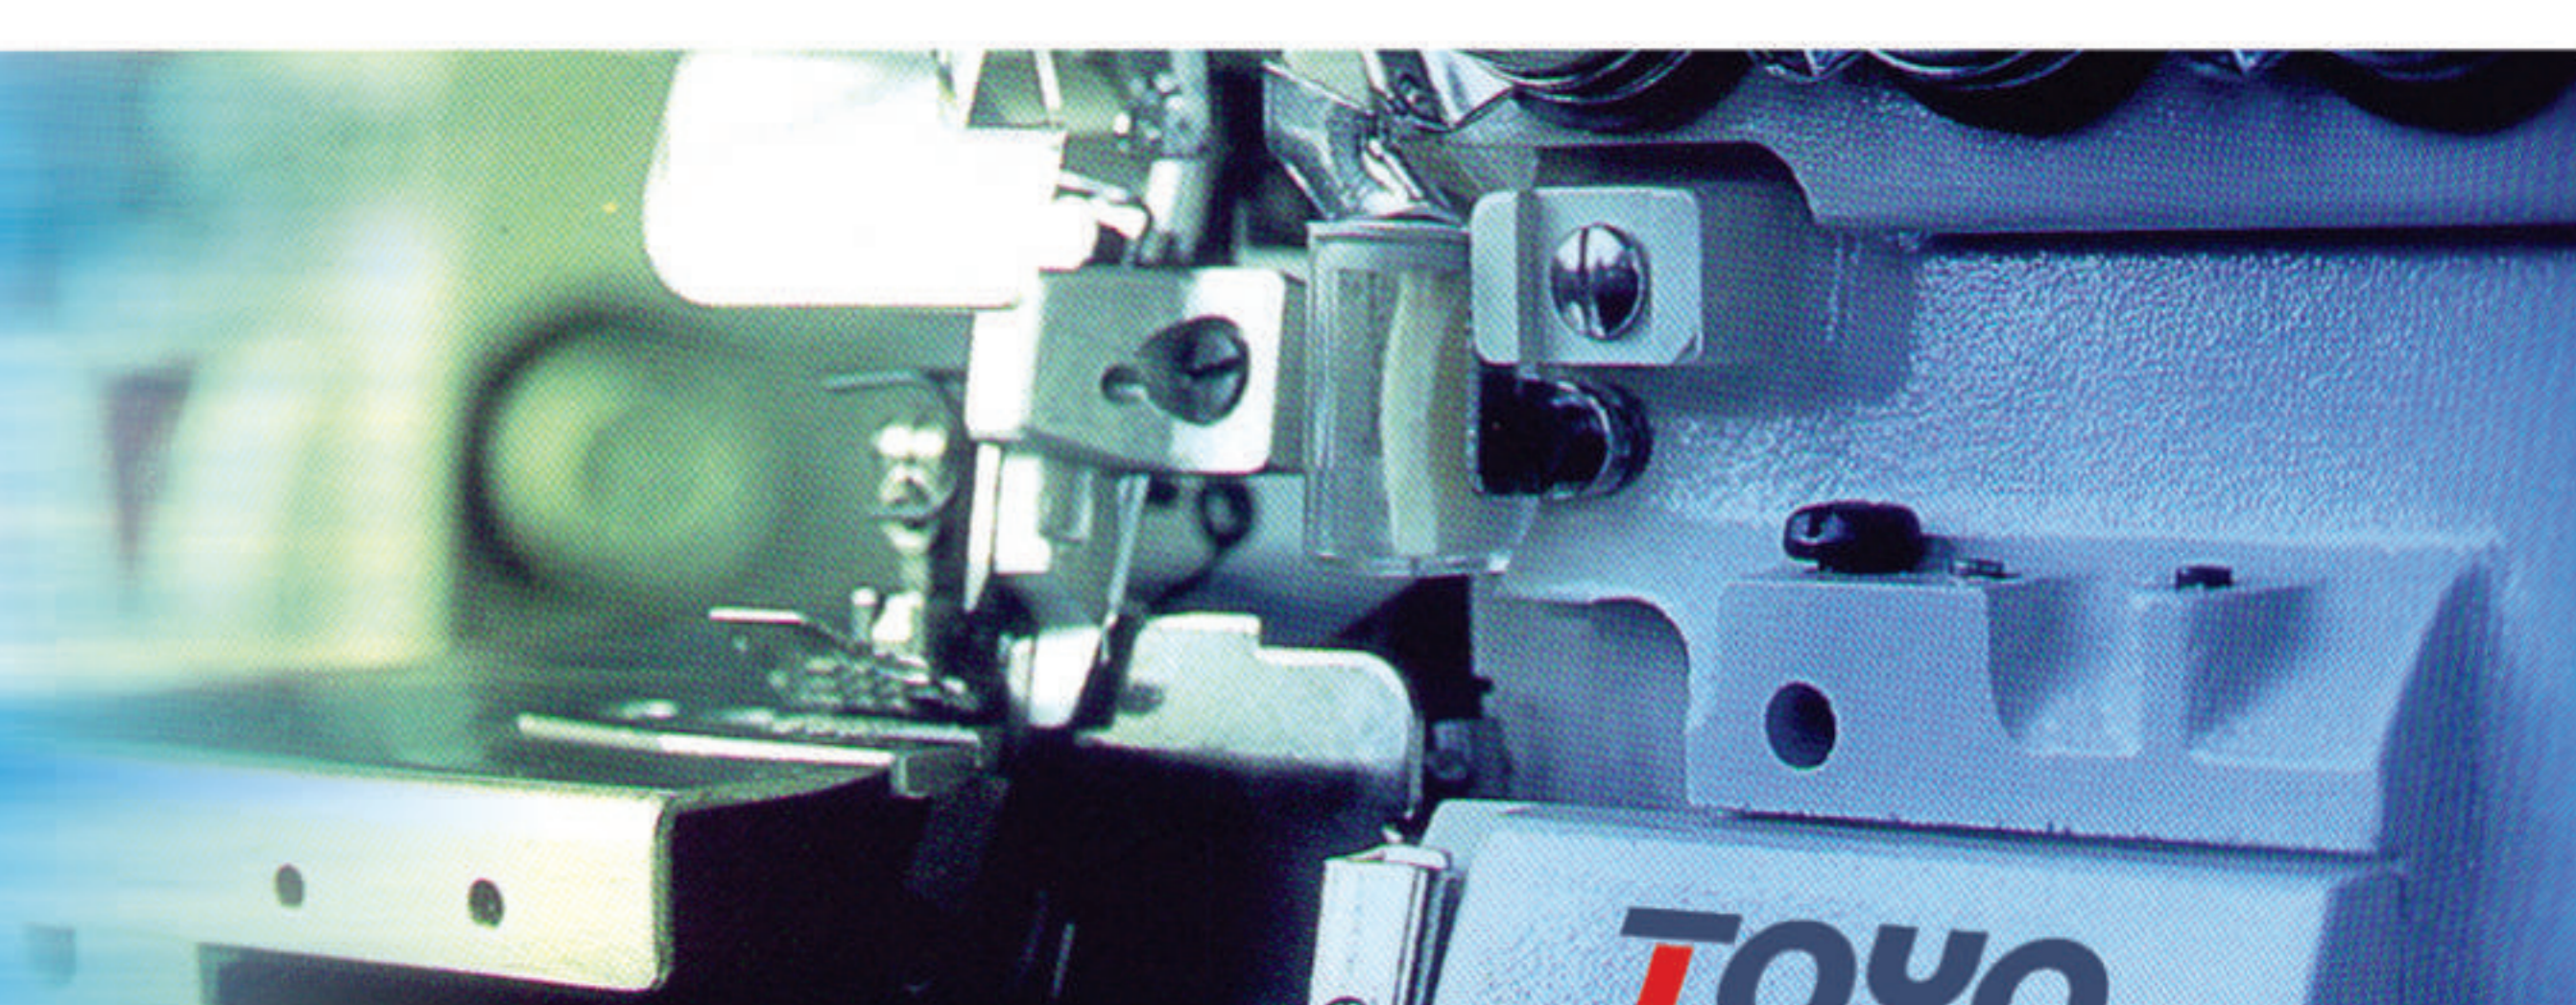





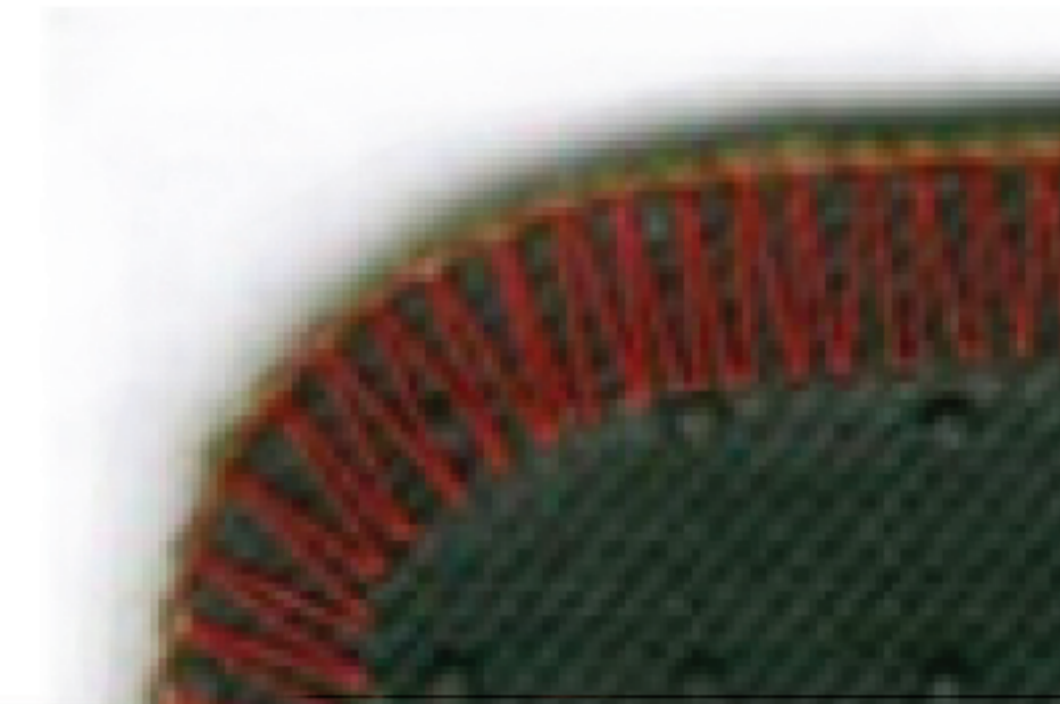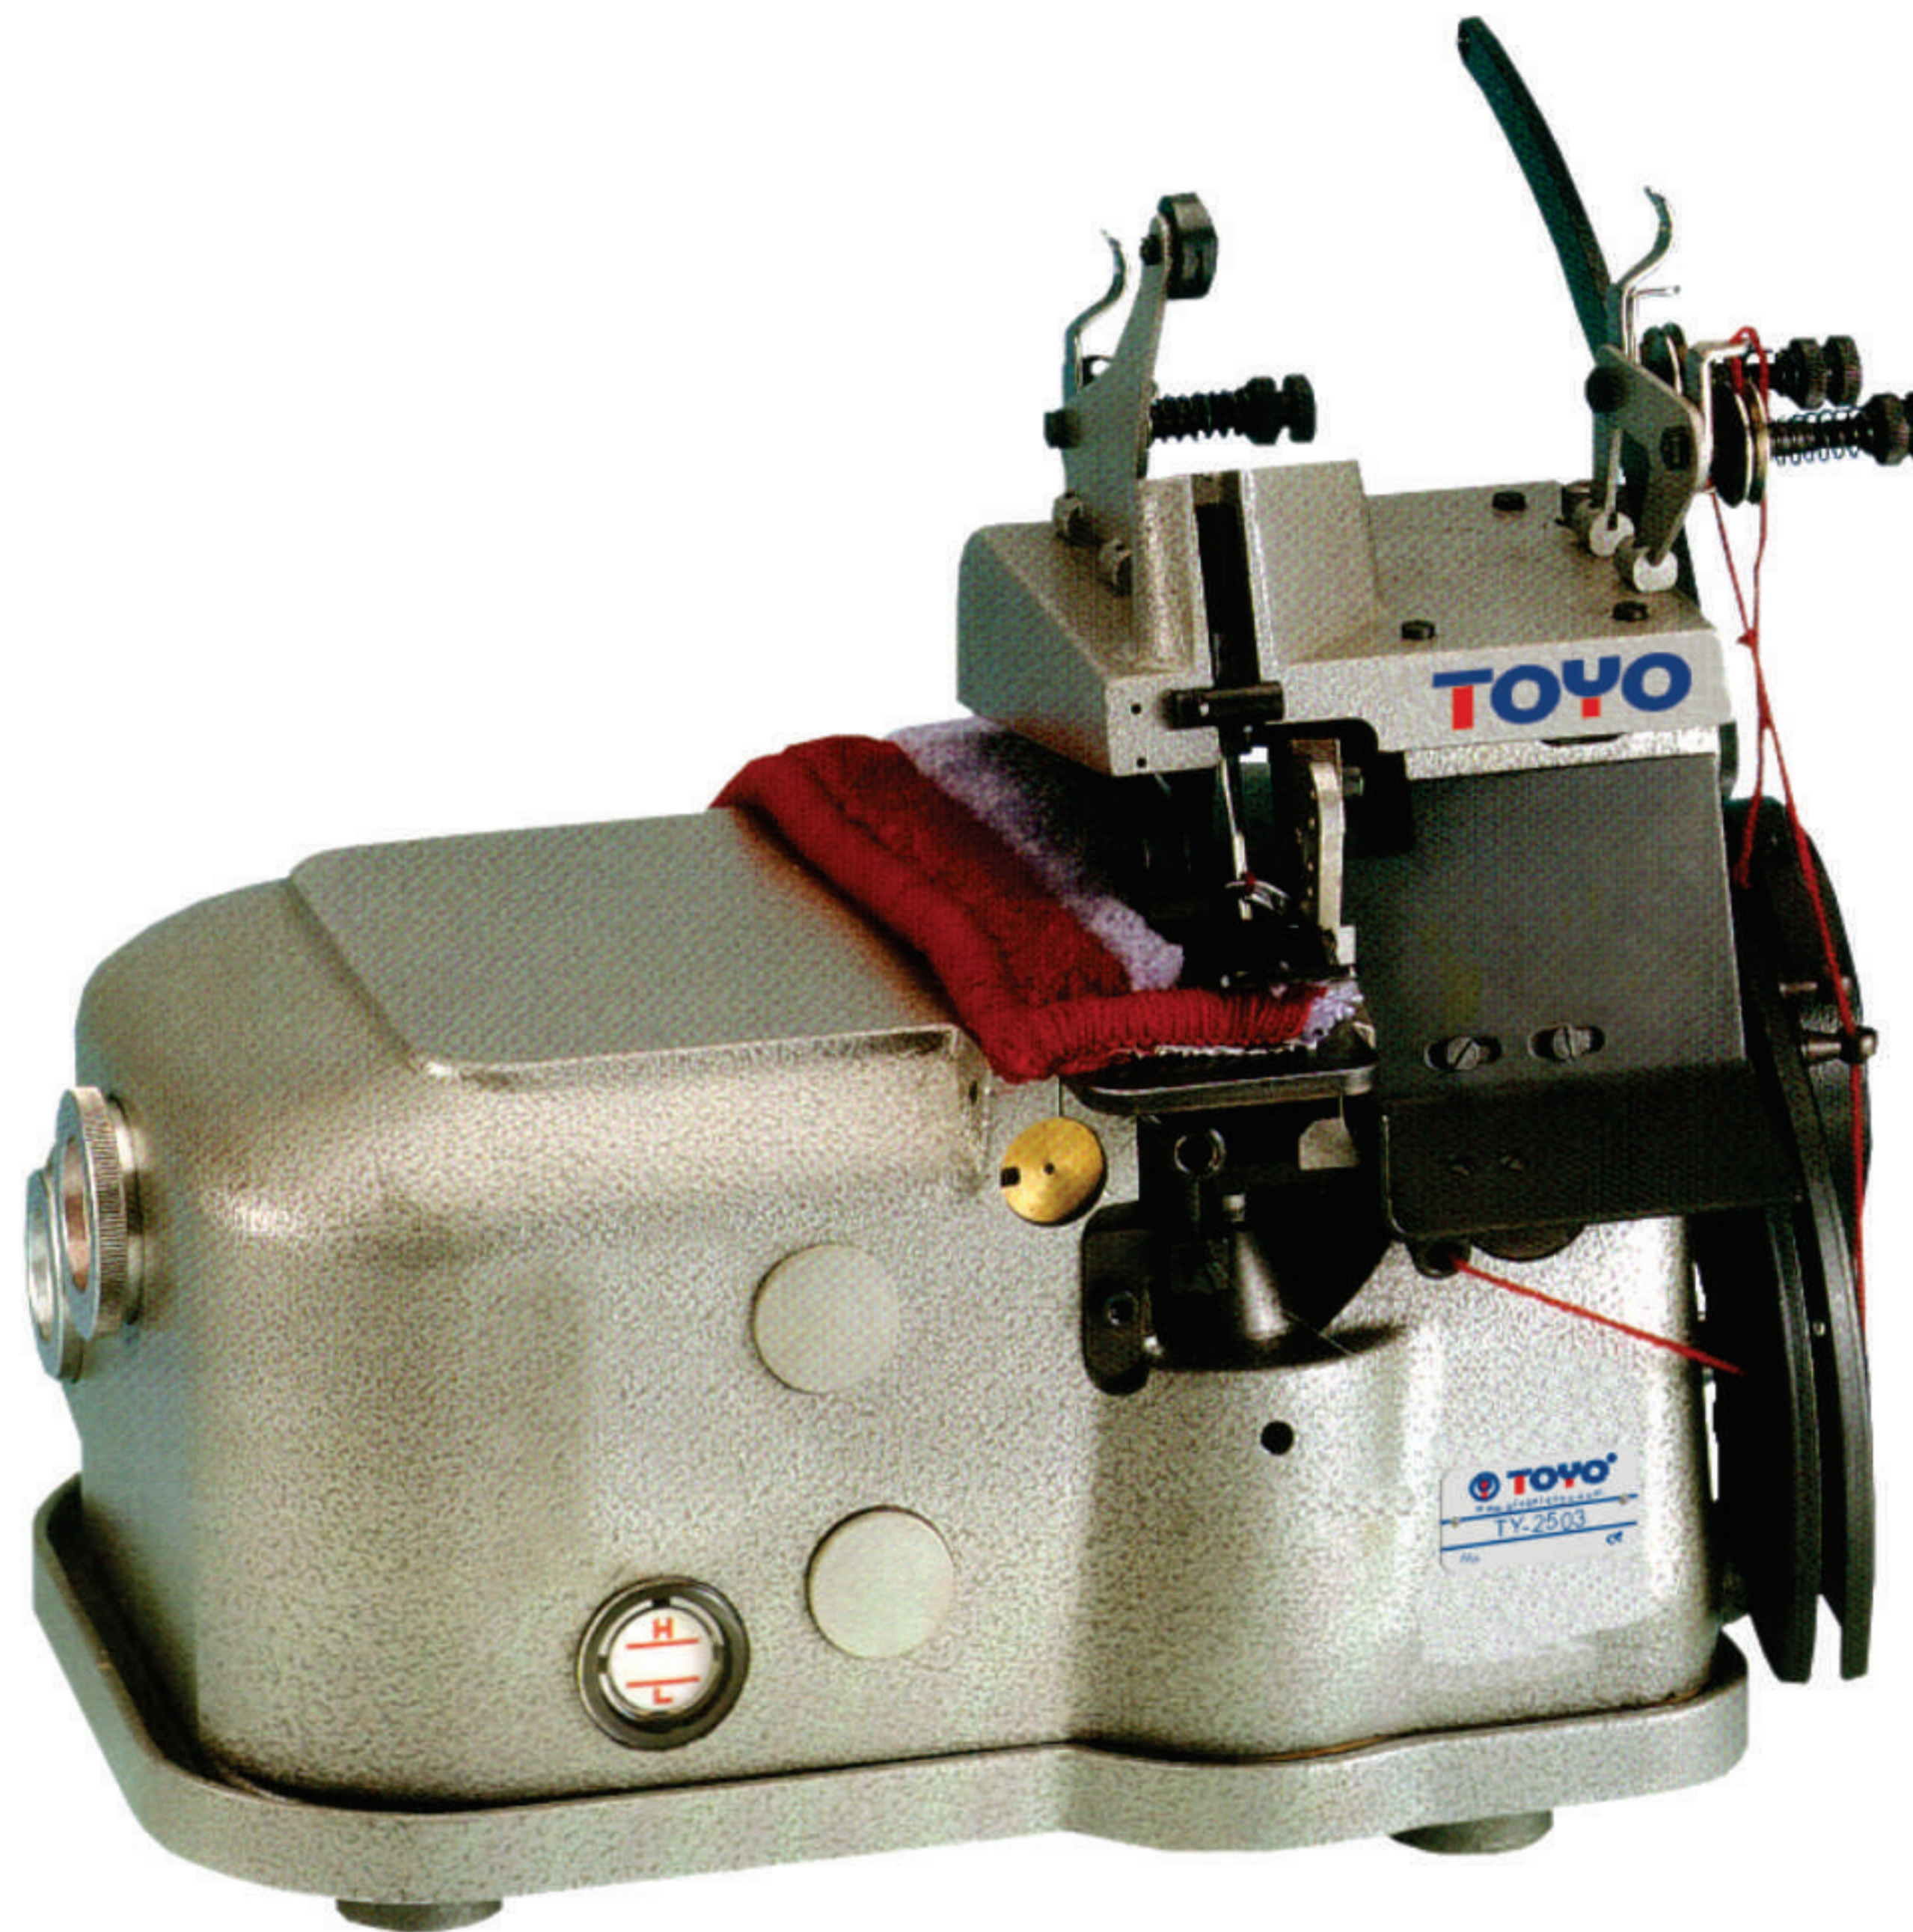



TY-2503

THREE THREAD CARPET OVEREDGING SEWING MACHINE




FEATURES

- Smooth & quiet running, easy maintenance.
- Easy adjustment ensure further refined sewing condition and quality.
- These machines are ideally suited for overedging on tufted carpets or rugs, blankets jute or poly propylene bags and any extra materials.

 Model	 Max.Sewing Speed	 No. of Needle	 No. of Threads	 Stitch Length	 Seam Width	 Sewing Material	 Trimmer
TY-2503	3500 s.p.m	1	3	3-8 mm	12 mm	Medium Heavy	-

Specifications subject to change without notice.



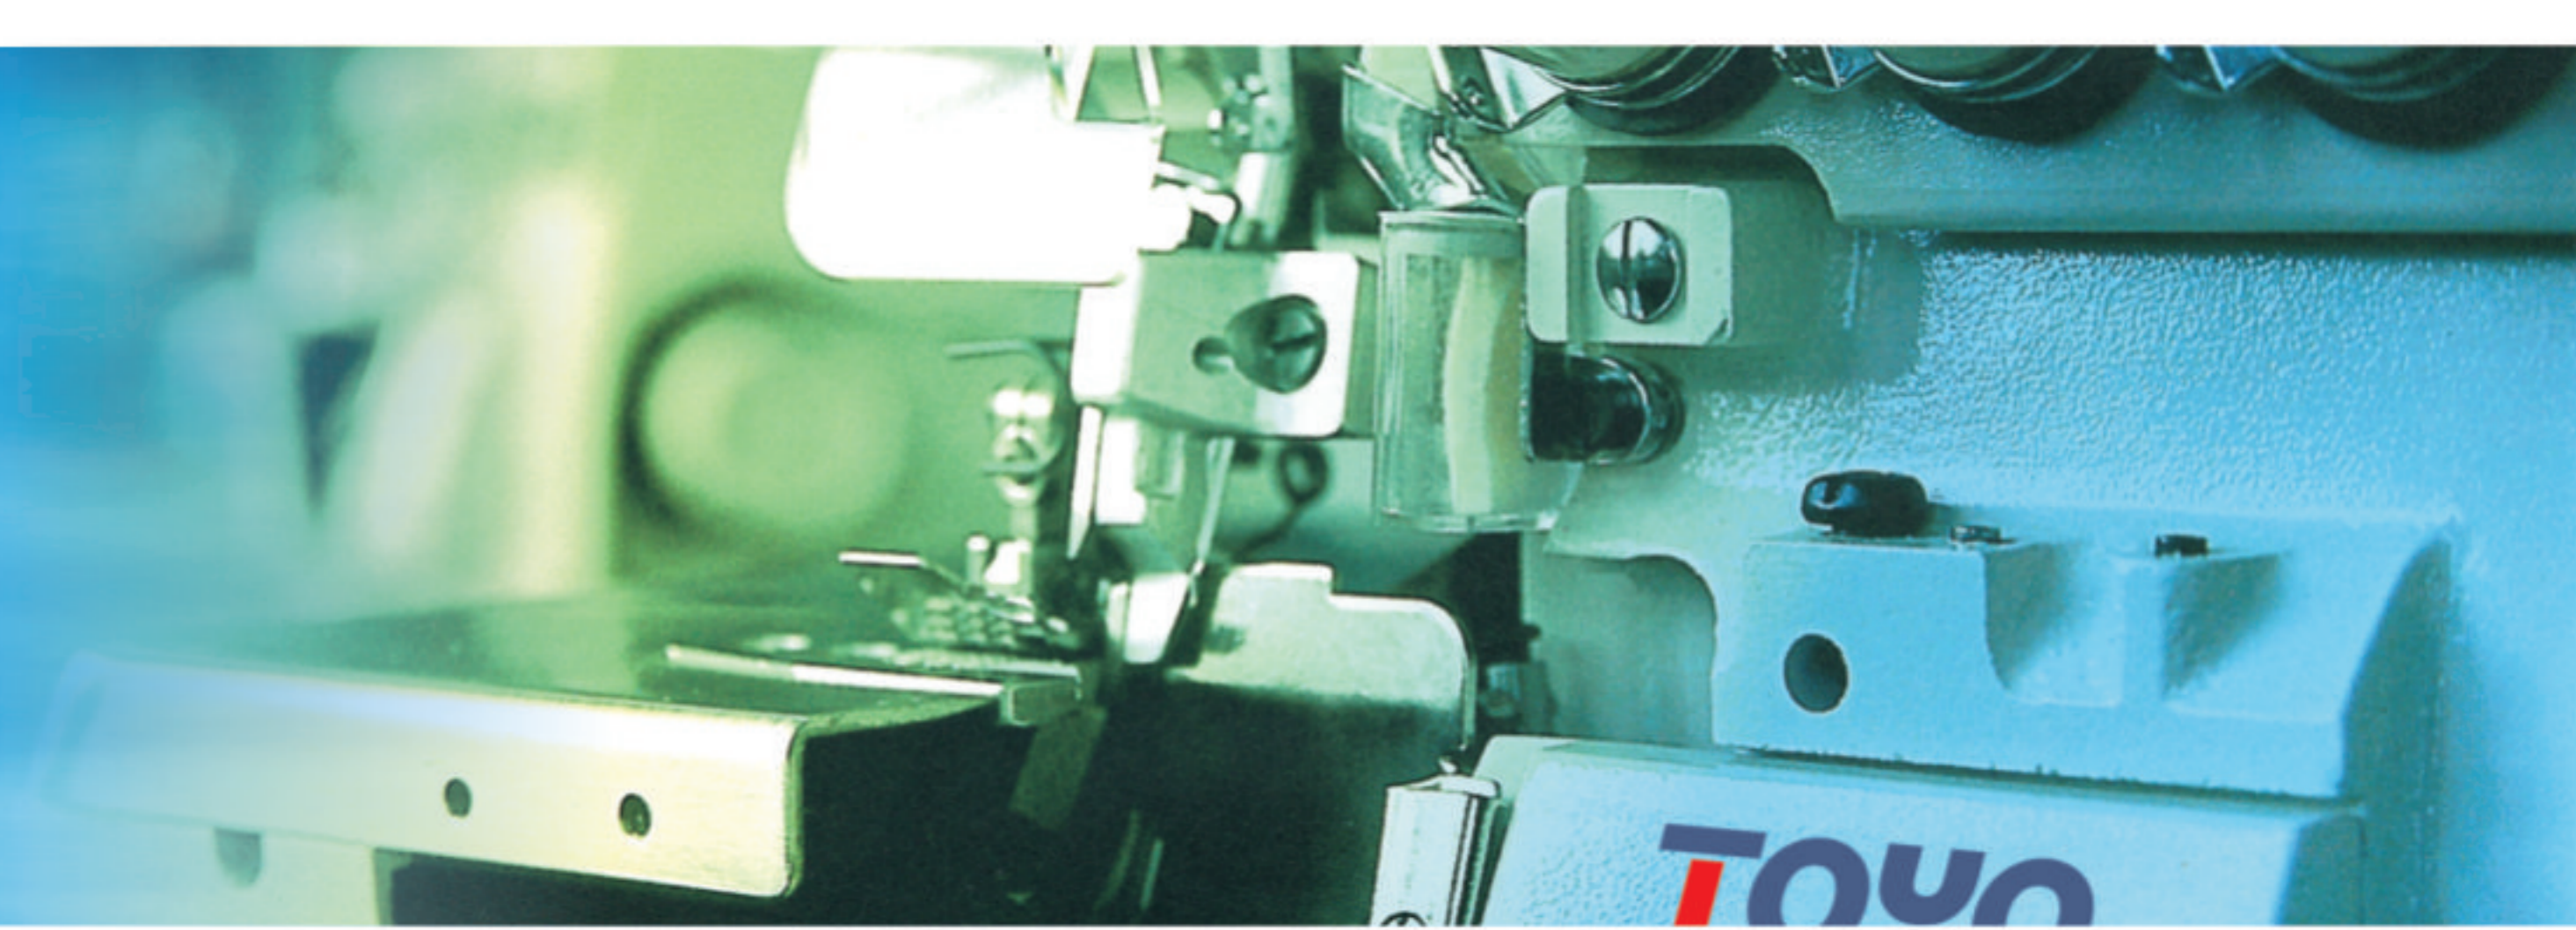

TY-3020R

Electronically Controlled Pattern Sewing Machine



FEATURES


1. High speed sewing machine.
2. Low power consumption, economical and practical.
3. Sewing completely according to stitching data.
4. Raising amount of the presser foot can be adjusted easily by the operation board.
5. Simple programme editor with colored LCD screen.
6. High quality sewing with fair lines.
7. High speed sewing with fair lines achieves, excellent sewing quality, high efficiency as well as energy saving.
8. The perforation of the needle can be strengthened.
9. Mass memory can store vast amount of data.
10. Changing memory switches from 3 mode i.e. 2-step lowering, 1-step lowering & Analog lowering.
11. The presser foot can be changed quickly & exactly.
12. The presser foot system can always provide sewing by consistent tension.
13. Fair sewing lines can be achieved by minimum resolution of 0.05mm.
14. It uses the small motor without transmission loss.

Model no.	Sewing area (mm)	Sewing speed (spm)	Stitch length (mm)	Work clamp height (mm)	Presser foot clearance (mm)	Presser foot drive	Max. Needle numbers	Feed mechanism	Memory	Power
TY-3020R	300x200	2700	0.05-12.7	30	22	Pulse motor drive	20,000 (stitches/pattern)	Intermittent	Flash (CF) or 3.5" floppy	1-Phase 3-Phase
TY-4030R	400x300	2700	0.05-12.7	30	22	Pulse motor drive	20,000 (stitches/pattern)	Intermittent	Flash (CF) or 3.5" floppy	1-Phase 3-Phase





TOYO

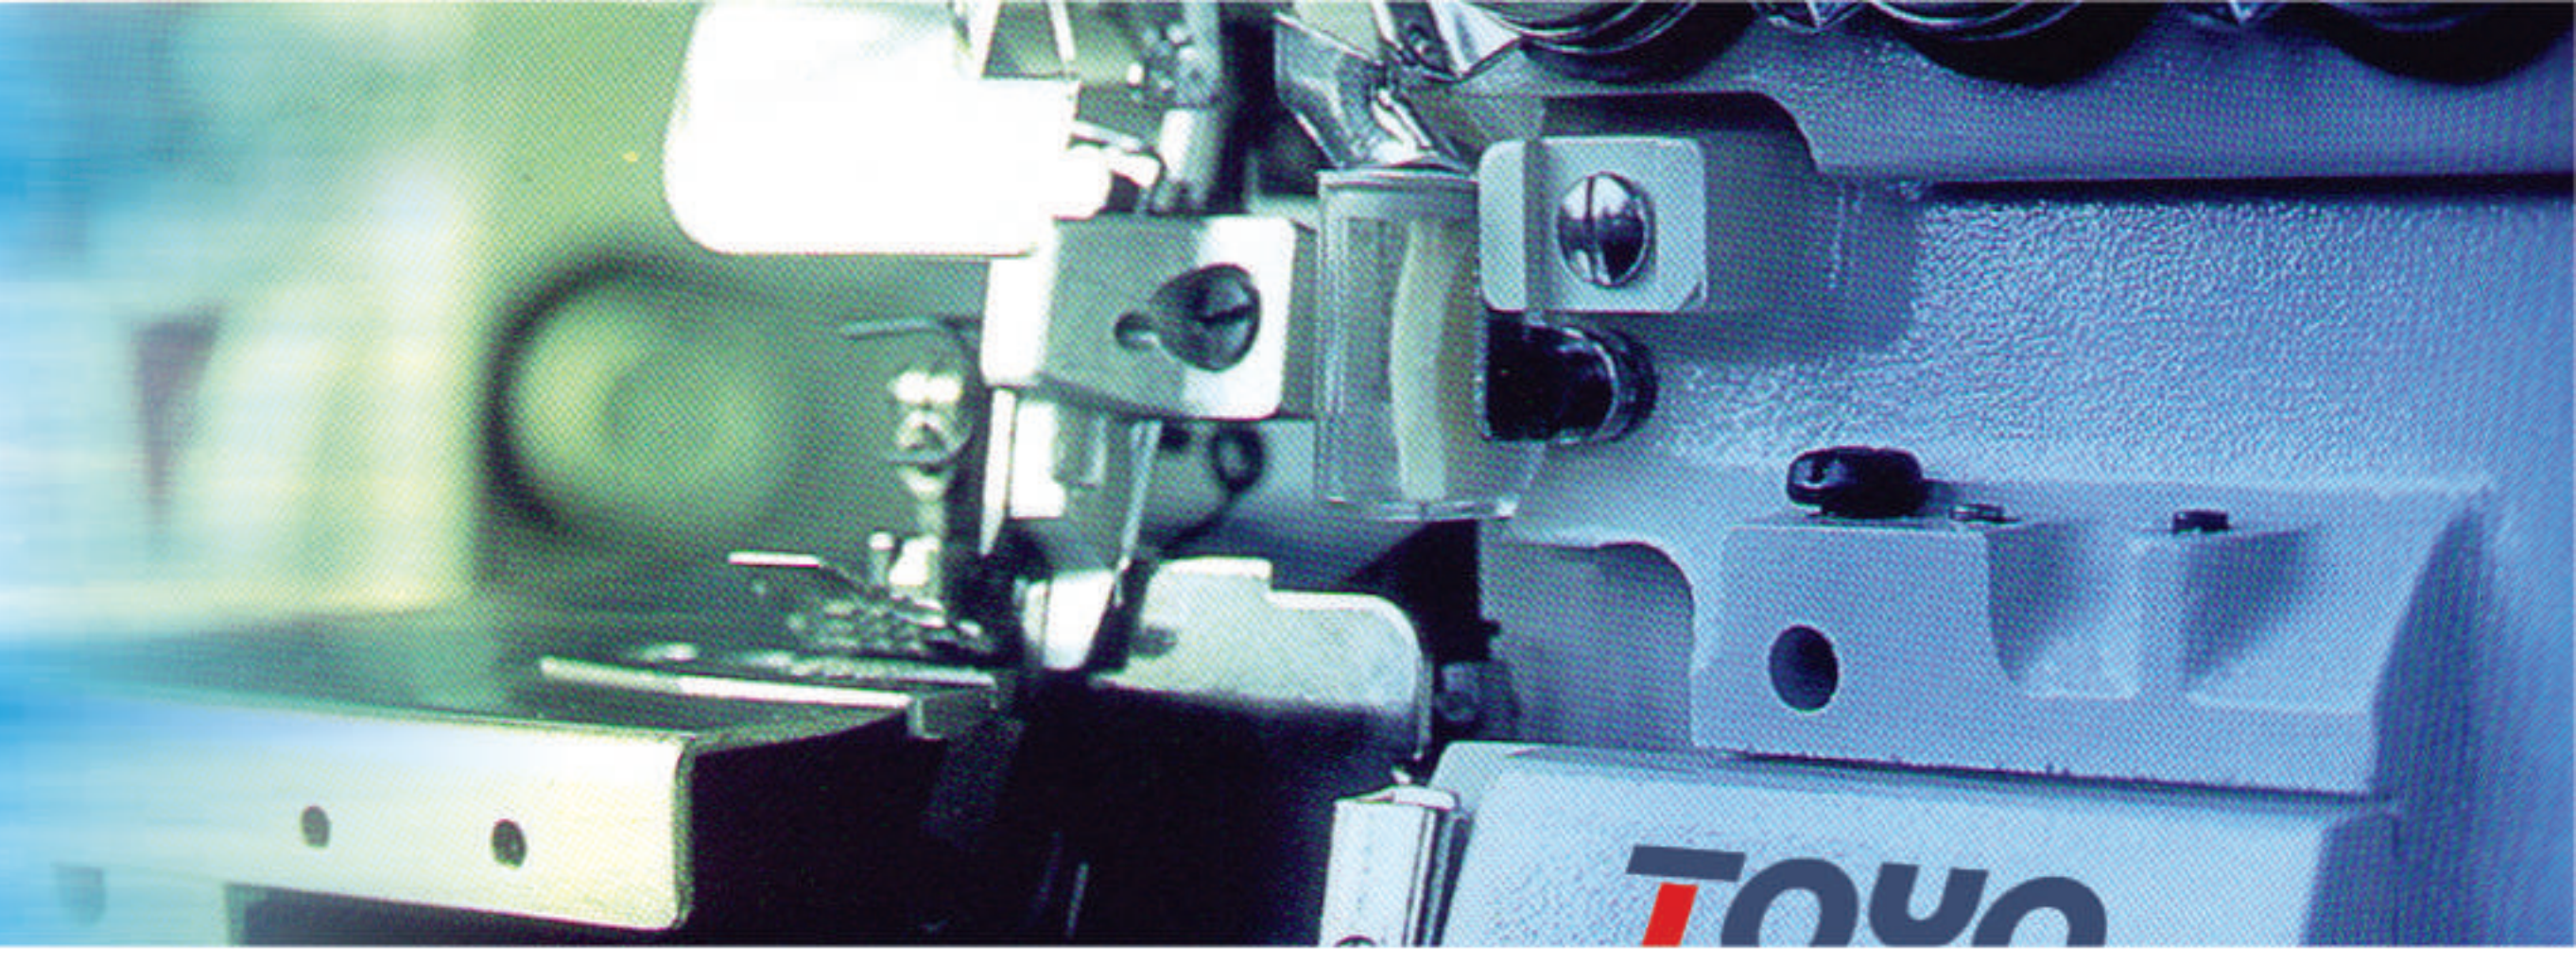

TY-3300-1D

SINGLE NEEDLE TOP-BOTTOM FEED FLATBED HEAVY DUTY LOCKSTITCH DIRECT DRIVE SEWING MACHINE




FEATURES

1. Heighten design in rear cover and cover axis design to avoid oil leakage and operating more safely.
2. Adopt the Innovative direct drive, energy-saving servo motor directly connect to the main shaft, start fast and stop accurately, reducing the responsive time.
3. 750W energy-saving servo motor, more powerful trimmer. Round knives, high-performance trimmer structural to ensure accurate trimming effect, the cut is flat.
4. Have the functions of automatic trimmer, automatic needle positioning, automatic counting and automatic reverse sewing.

TY-3300-1D	DPX17 20#-23#	8	7/13	★	★	★	★	2000	-	★	630X250X560	34/38	

Specifications subject to change without notice.





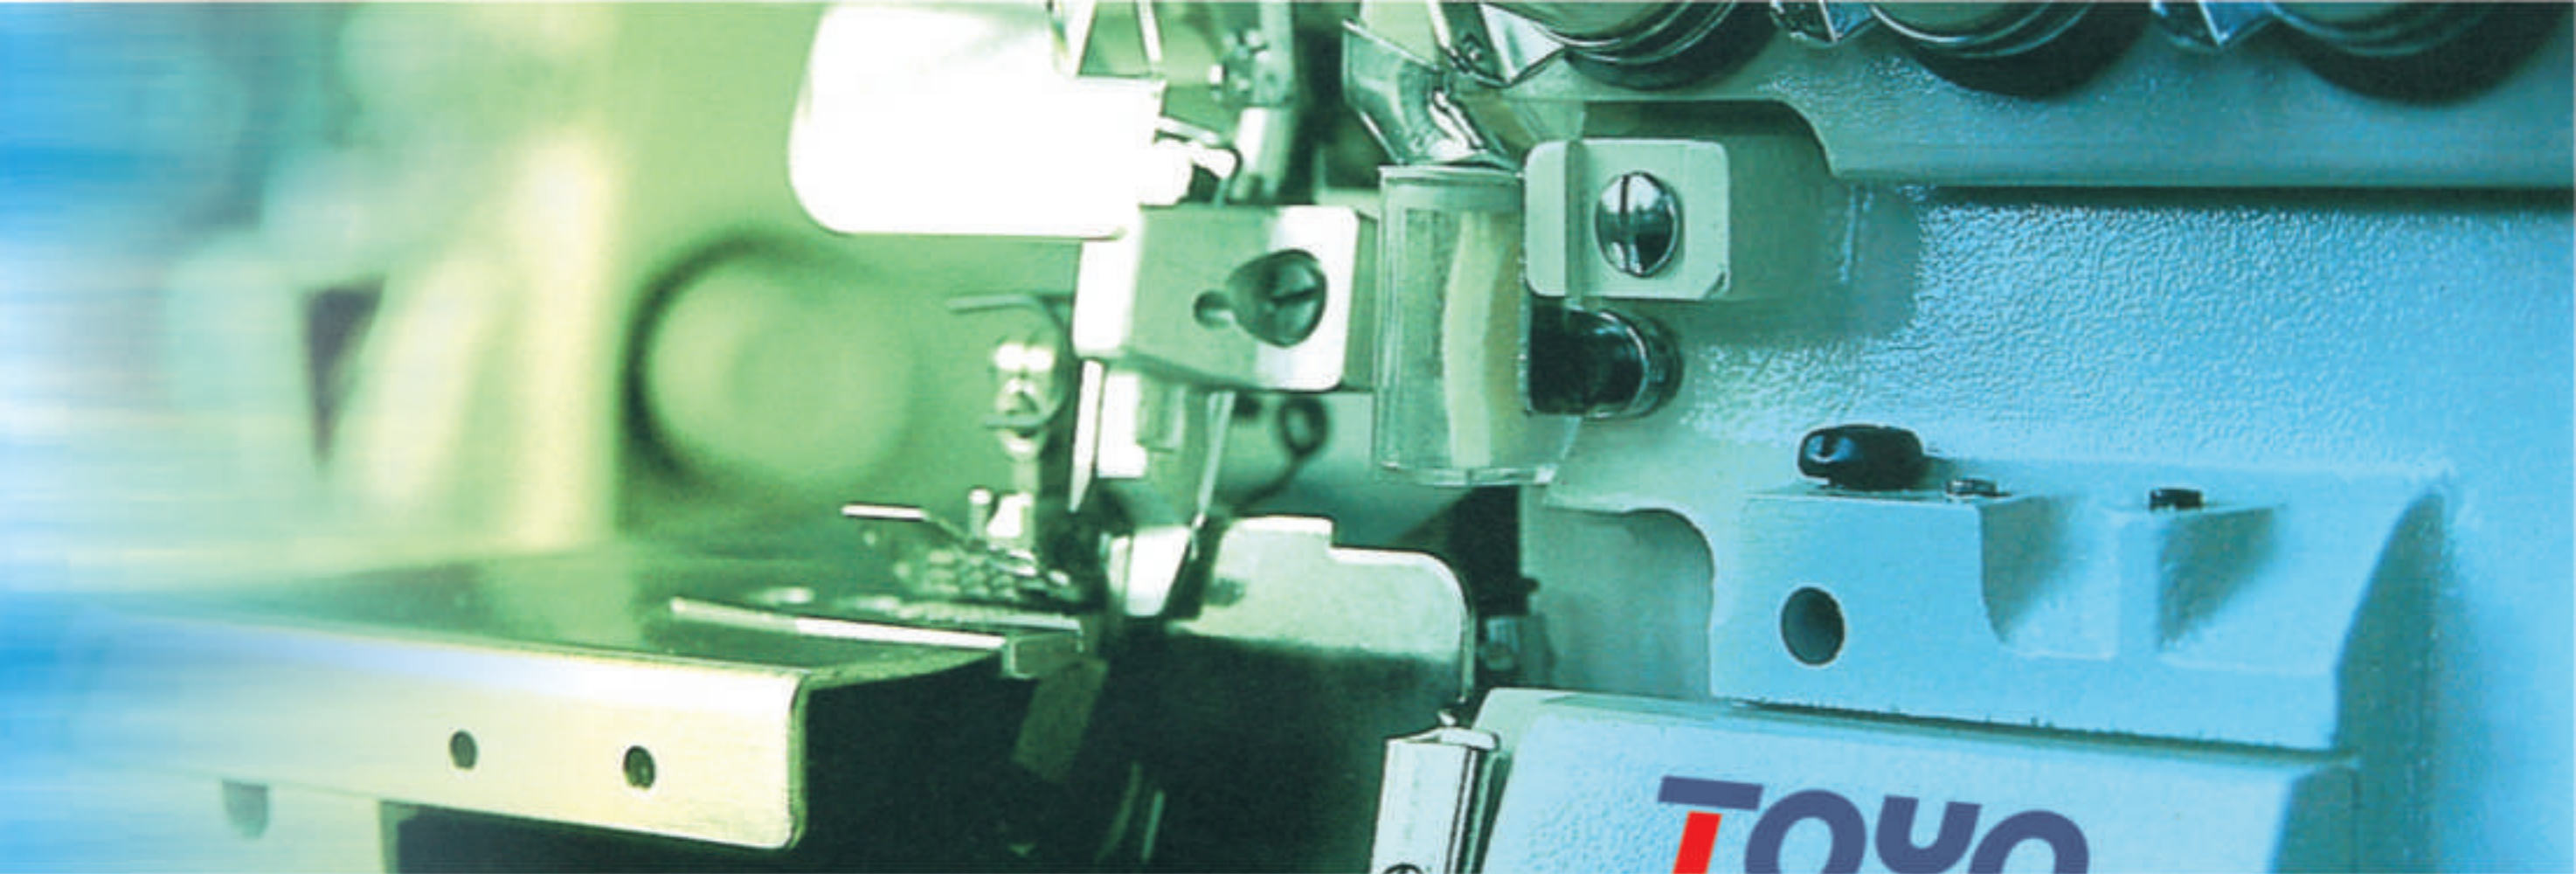


TY-4150

TY-4250

(DOUBLE NEEDLE)

SINGLE NEEDLE FLATBED LOCKSTITCH SEWING MACHINE WITH UNISON FEED (LARGE HOOK)

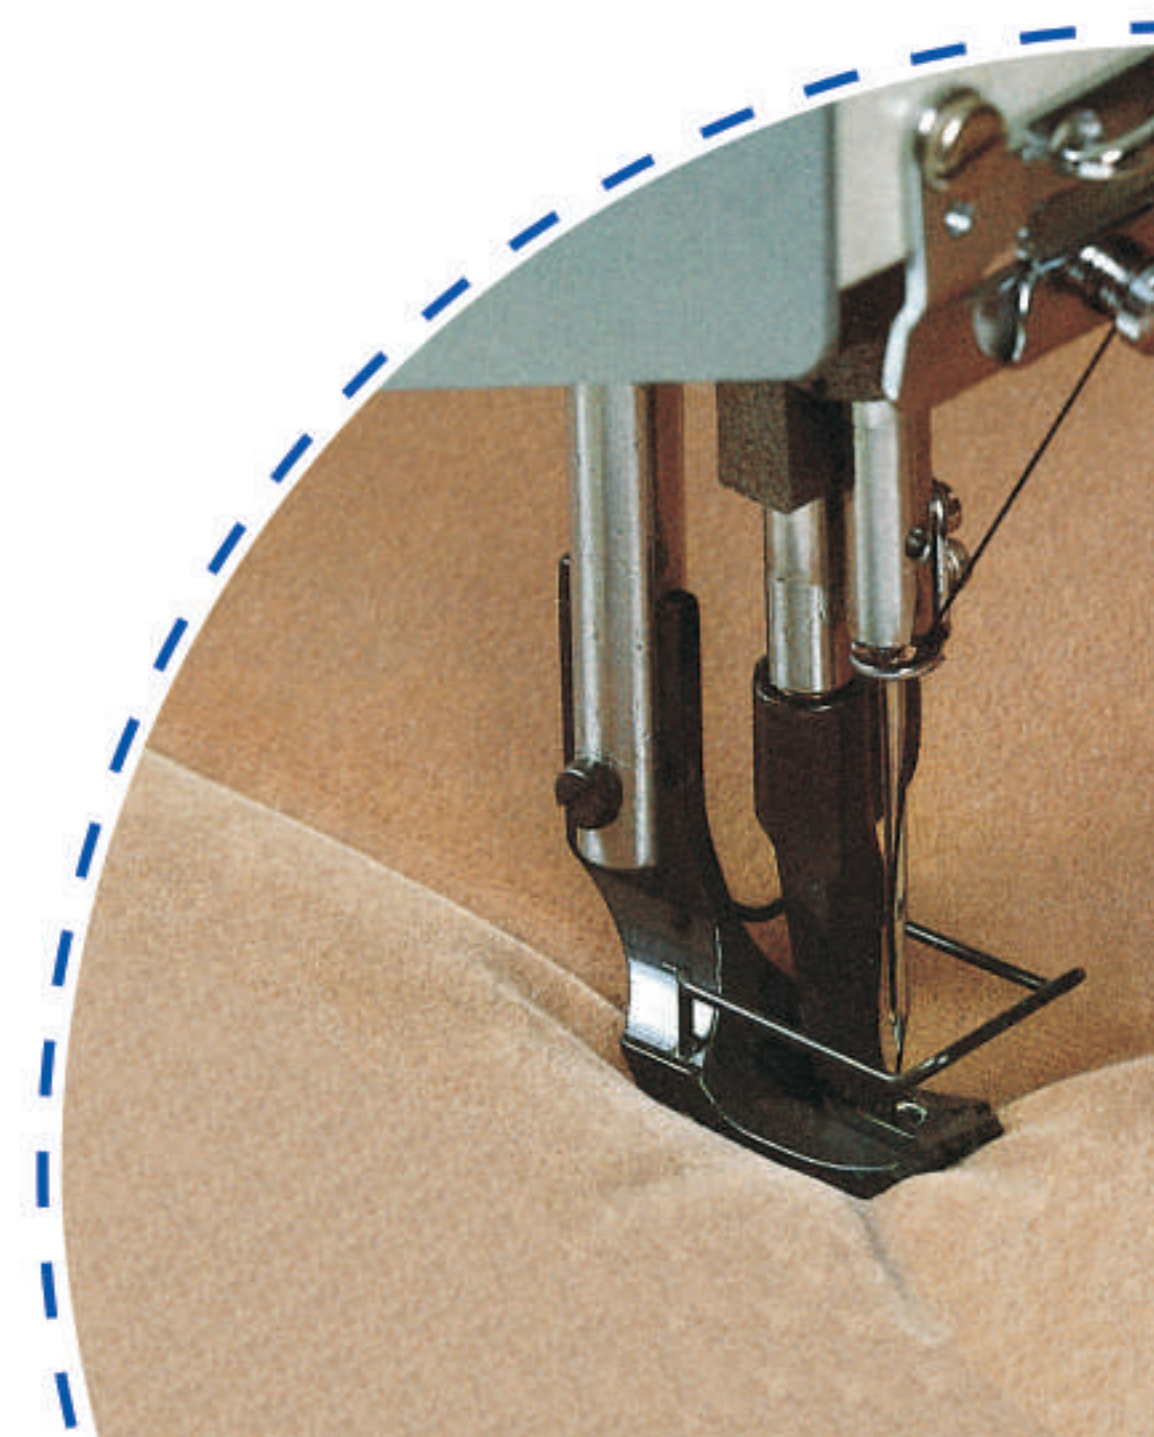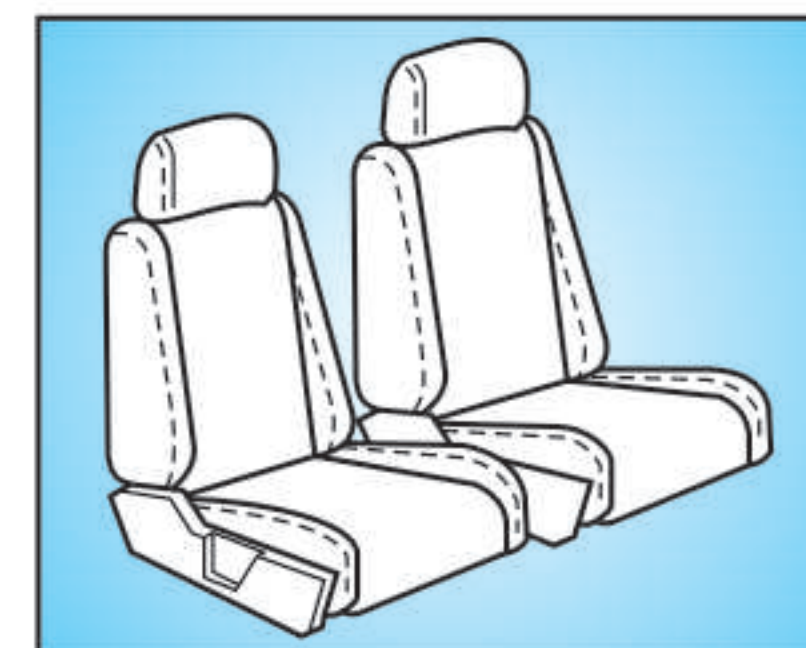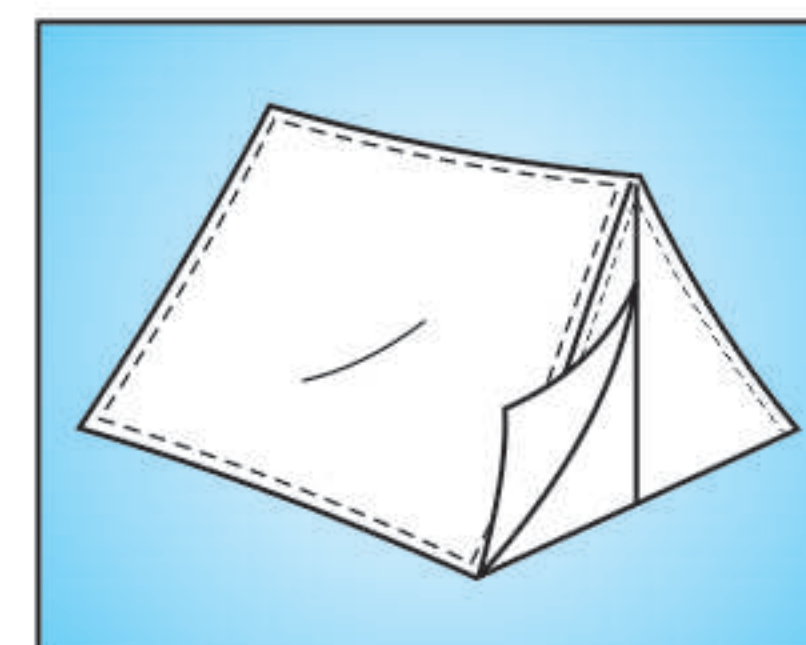


FEATURES

- Positive feed mechanism, sturdy durability, easy adjustment.
- Automatic lubricating system, smooth and quiet running, easy maintenance.
- Large hook to assure high efficiency, perfect stitch.
- These machines are equipped with walking foot, needle feed and feed dog, all of which act completely in unison. Consequently, the upper or lower sewing material does not slip and also these machines can sew accurately and easily several sheets of heavy-weight materials piled up together.
- The stitch length adjusting dial can be turned with ease and with light touch to the lever, stitching can be reversed.
- These machines are best suited for sewing tents, rugs, seats, cushions, bags, saddlery, leather products, interior furnishings of automobiles, etc.

Model	Max.Sewing Speed	Needle System	Needle Bar Stroke	Stitch Length	Presser Foot Lift		Sewing Material	Horizontal Rotating Hook	Needle Gauge	
					Hand	Knee			Standard	Optional
TY-4150	2000 s.p.m	DP x 17 #16 ~ #25	36 mm	0-9 mm	8 mm	16 mm	Medium Heavy	Large	---	---
TY-4250	2000 s.p.m	DP x 17 #16 ~ #25	36 mm	0-9 mm	8 mm	16 mm	Medium Heavy	Large	6.4 mm	3.2,4,4.8,8,9.5, 12.7,16,19,25.4 mm


Specifications subject to change without notice.



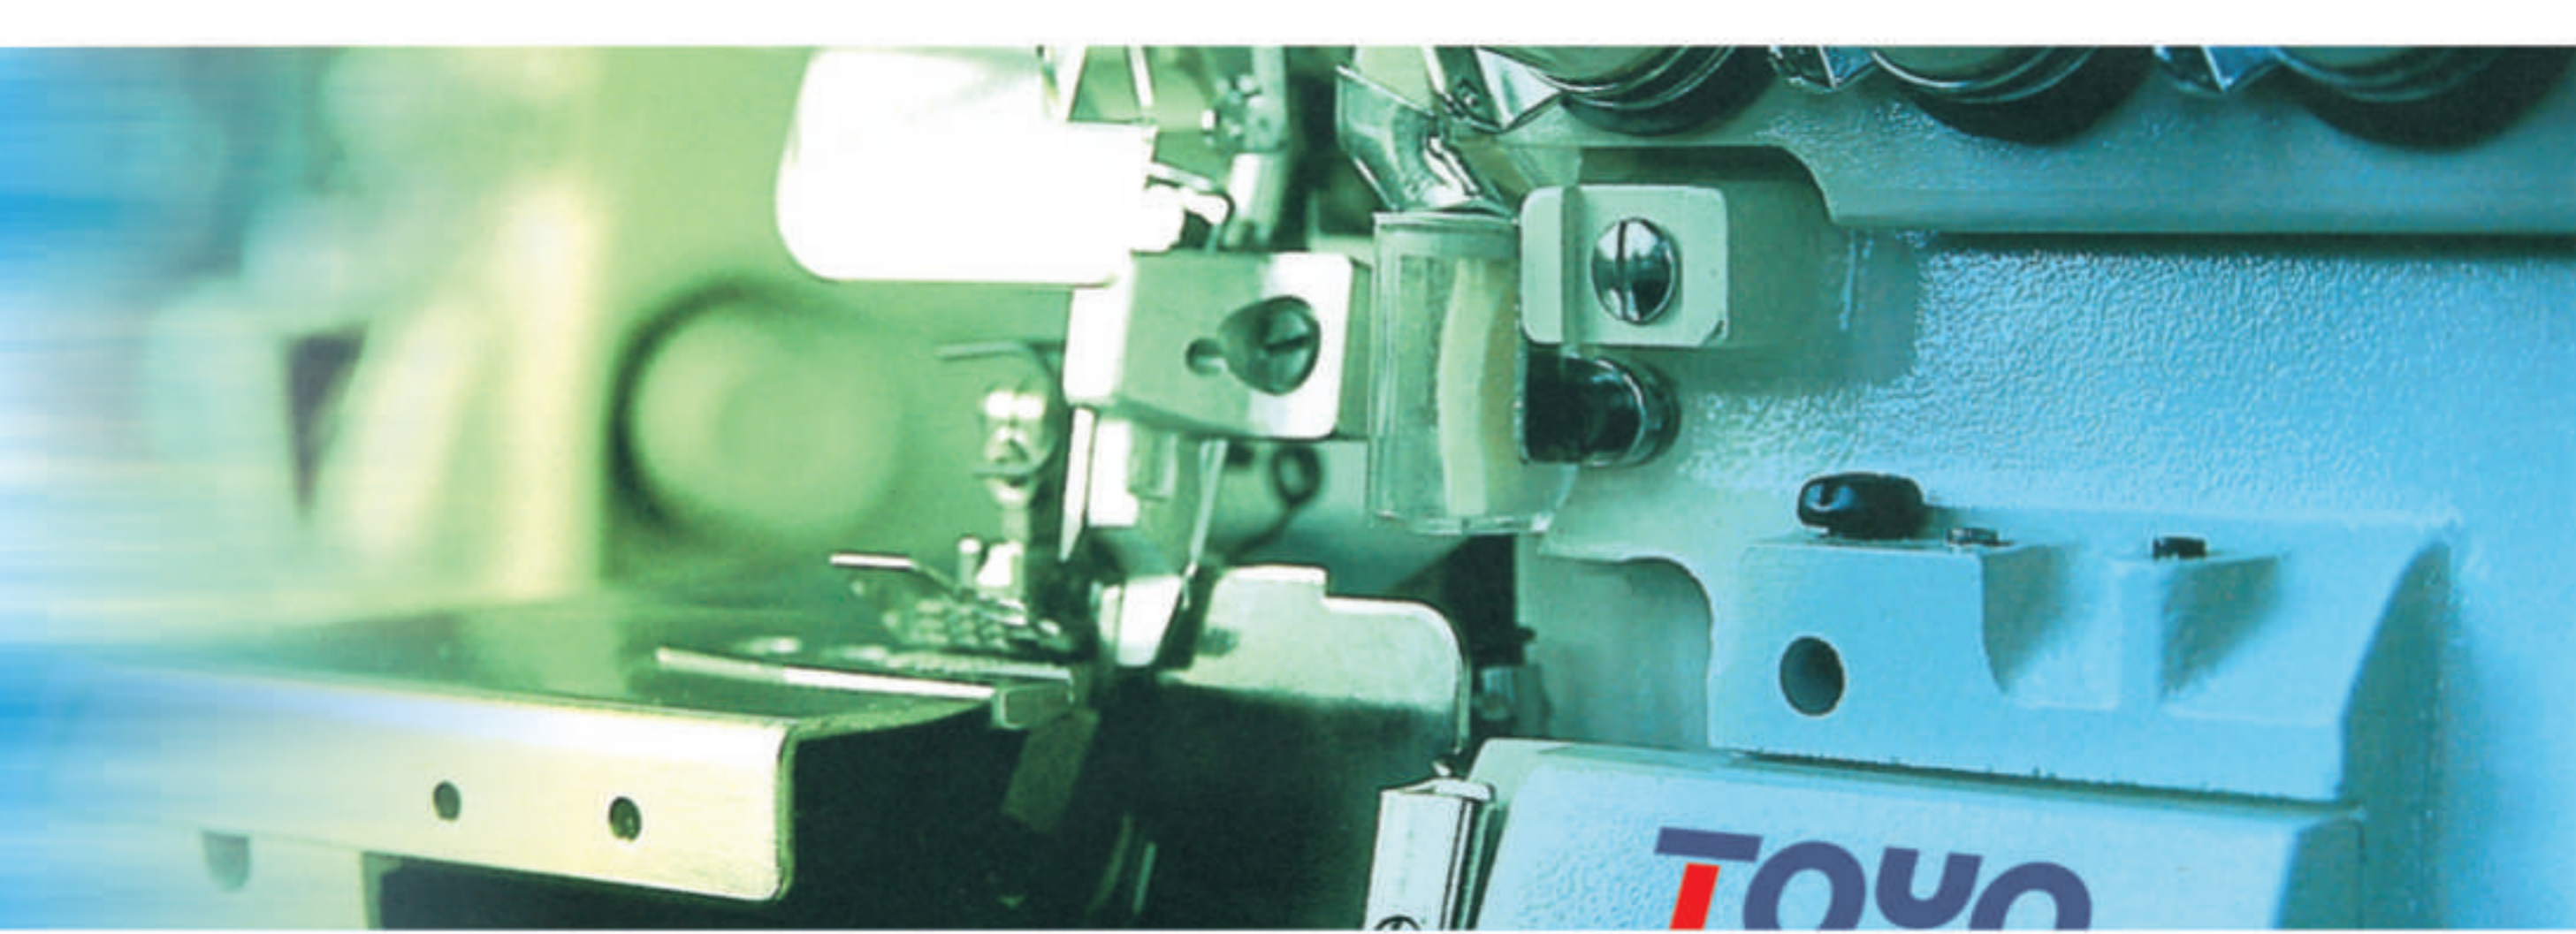



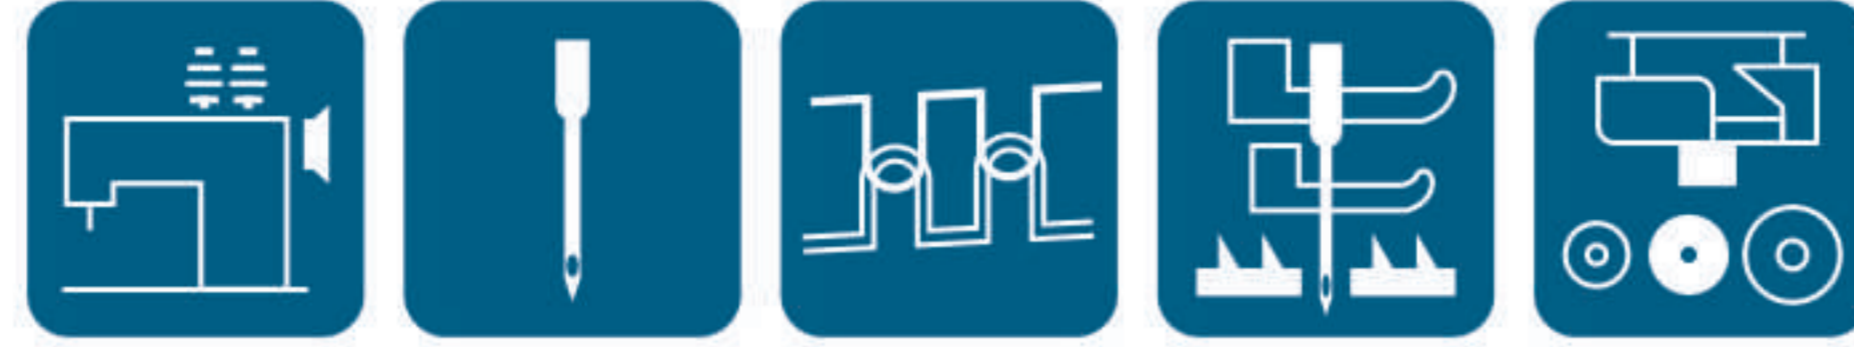



TY-8243

Single Needle Cylinder Bed Sewing Machine with Unison Feed (Large Hook)




FEATURES

- Applied with large hook ensures high sewing efficiency. These machines are equipped with walking foot, needle feed and feed dog, all of which act completely in unison. Consequently, the upper or lower sewing material does not slip and also these machines can sew accurately and easily several sheets of heavy weight materials piled up together. The stitch length adjusting dial can be turned with ease. And with light touch to the lever, stitching can be reversed.

Model No.	 Max. Sewing Speed S. P. M.	 Lifting Of Presser Foot (Knee) mm	 Max. Stitch Length mm	 Needle Bar Stroke mm	Hook System	 Needle System	 The Alternating Movement of Presser Foot mm
CS-8243	2000	13	6	36	Large Hook	DP×17#23 (#20~#23)	3~7

Specifications subject to change without notice.



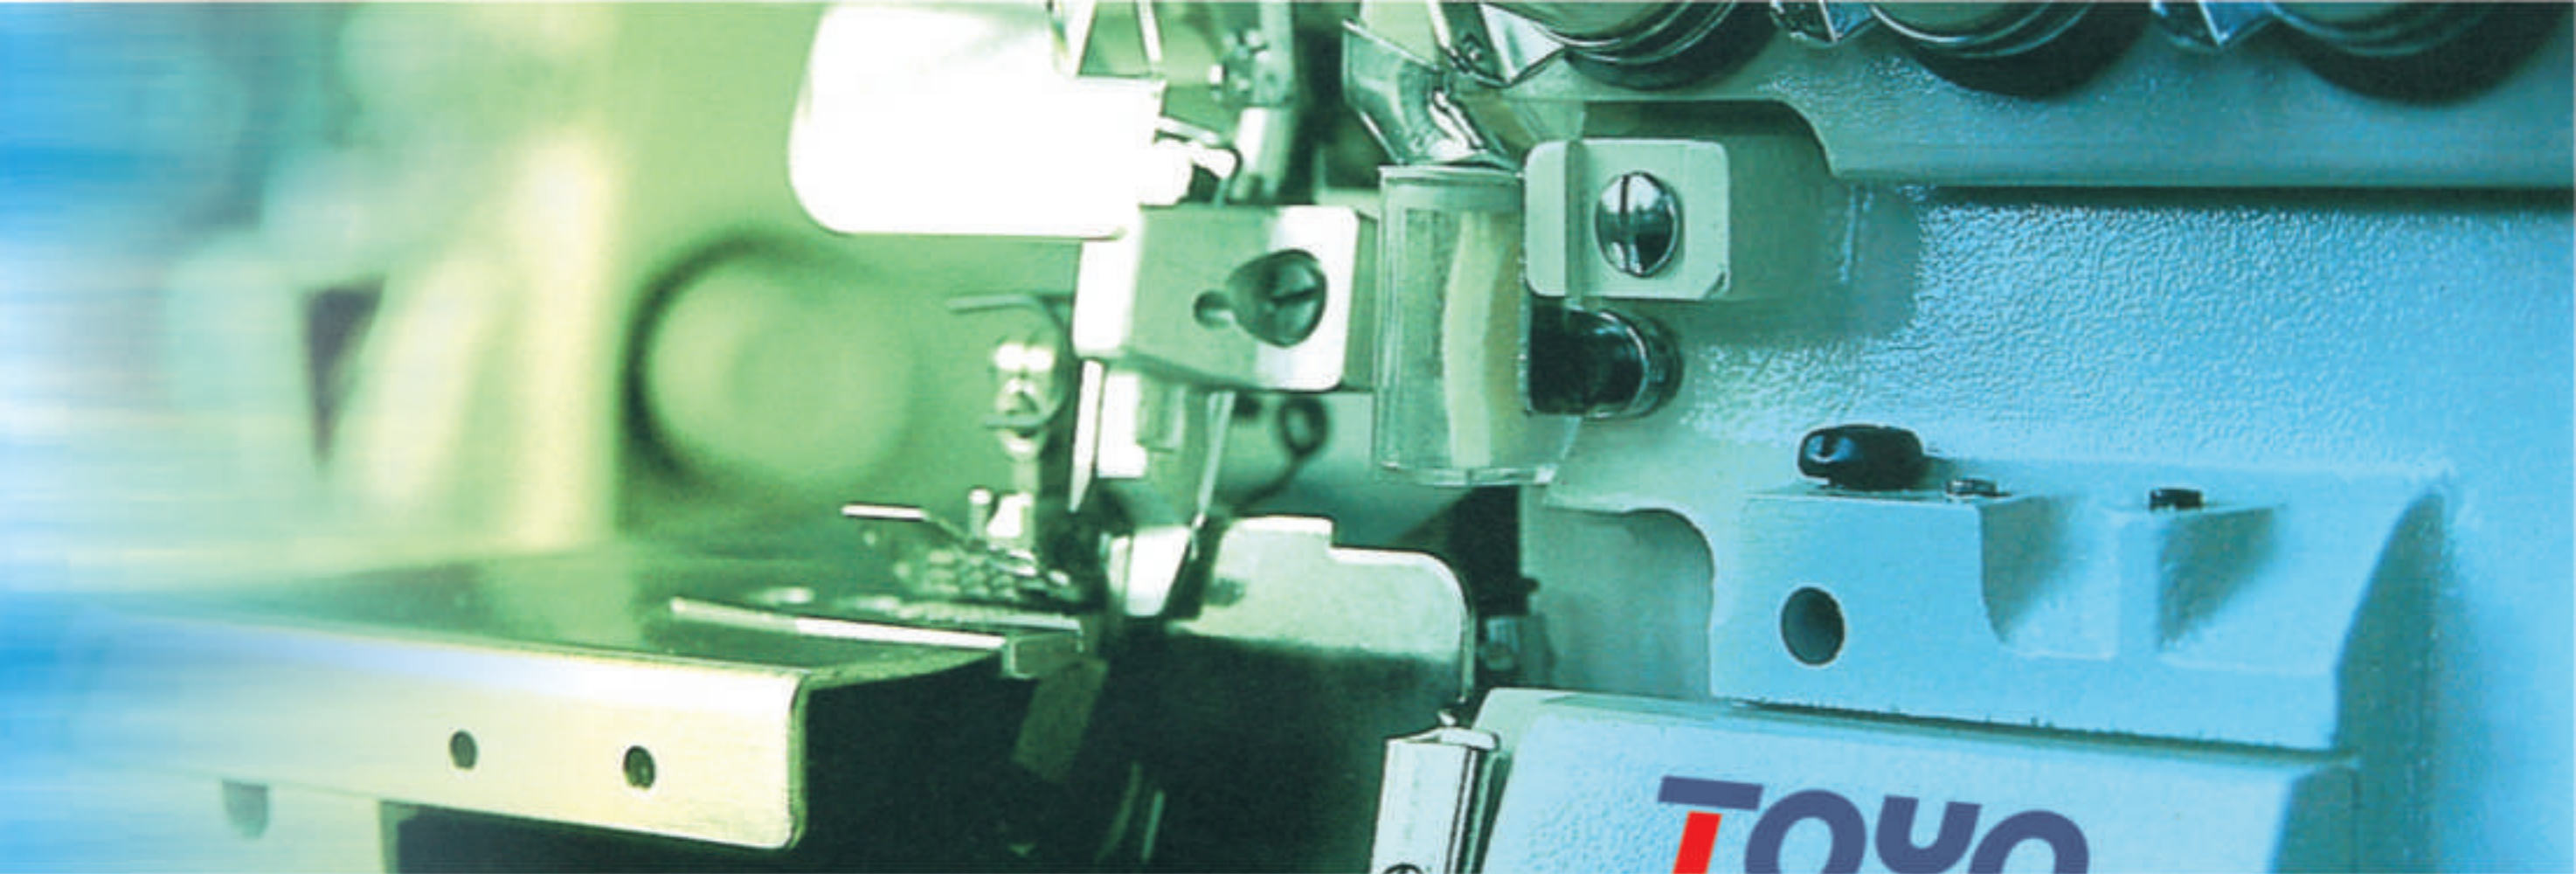


TY-8365

TY-8366







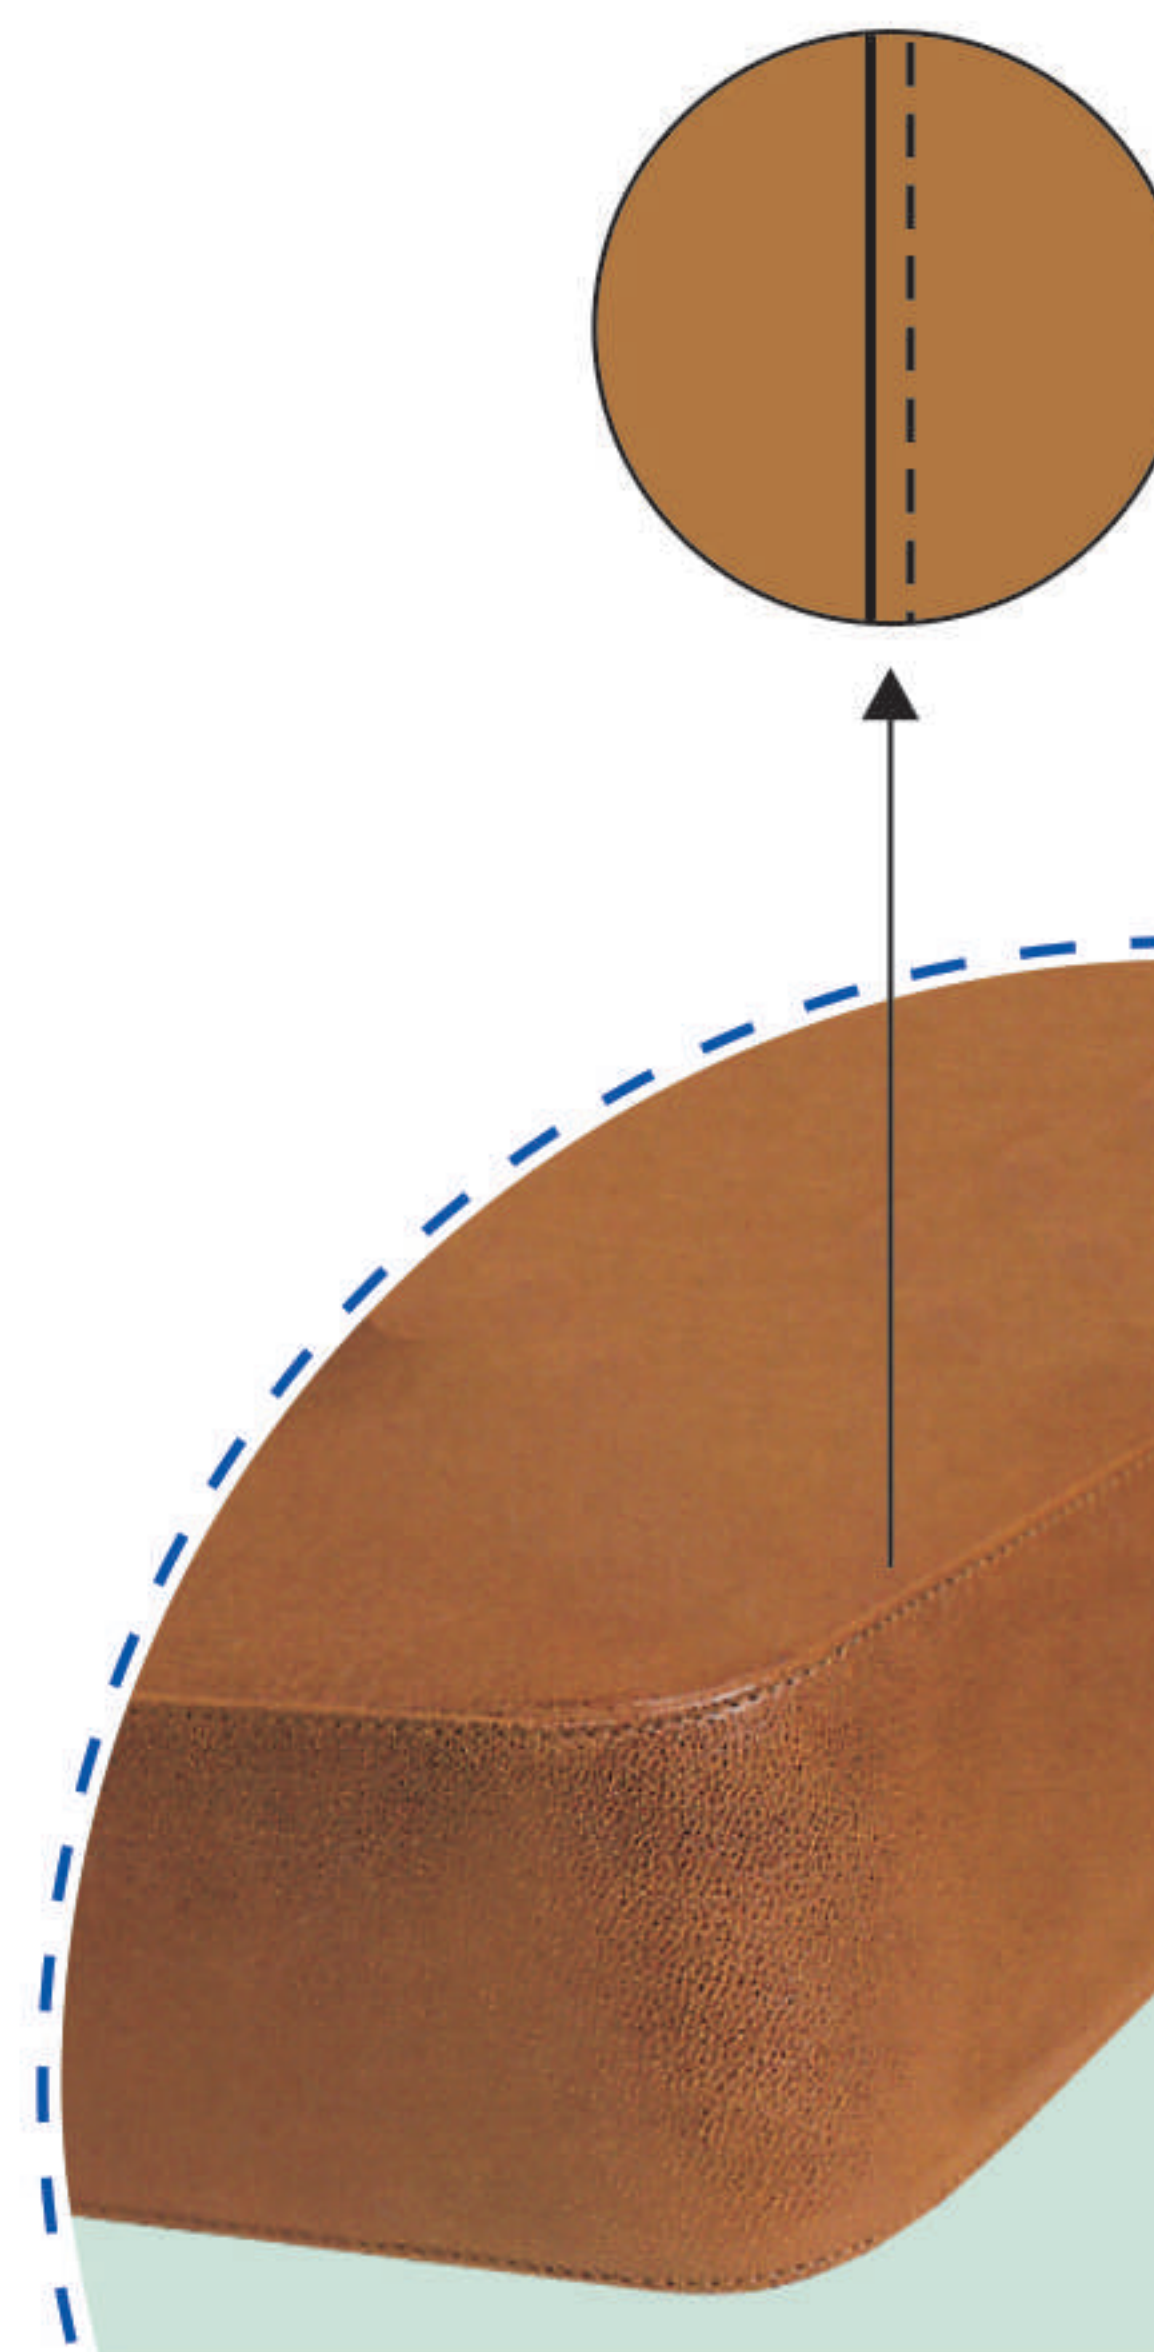

(RIGHT SIDE POST)

HIGH POSTBED SEWING MACHINE




FEATURES

- High-postbed design (postbed height : 443mm & postbed diameter : 47mm)
- Distance from edge to needle is 2.6mm, hence can stitch at extreme corners.
- With special designed needle plate, suitable for stitching the small-curved portions such as the bottoms, gores & corners of the bags.
- The stitch length could be easily adjusted with the stitch dial.
- With unison feed, could obtain a smooth sewing quality on either thin or thick materials.
- Backtacking only with gentle press on the backtacking bar, convenient operation.
- These machines are ideally suited for stitching the large & three-dimensional articles such as boots, bags, suitcase, etc.

 Model	 Max.Sewing Speed	 Needle System	 Needle Bar Stroke	 Stitch Length	 Presser Foot Lift	 Sewing Material	 Alternating Movement
TY-8365	1600 s.p.m	DP x 17	36 mm	6 mm	15 mm	Medium Heavy	3 ~ 7 mm
TY-8366	1600 s.p.m	DP x 17	36 mm	6 mm	15 mm	Medium Heavy	3 ~ 7 mm

Specifications subject to change without notice.



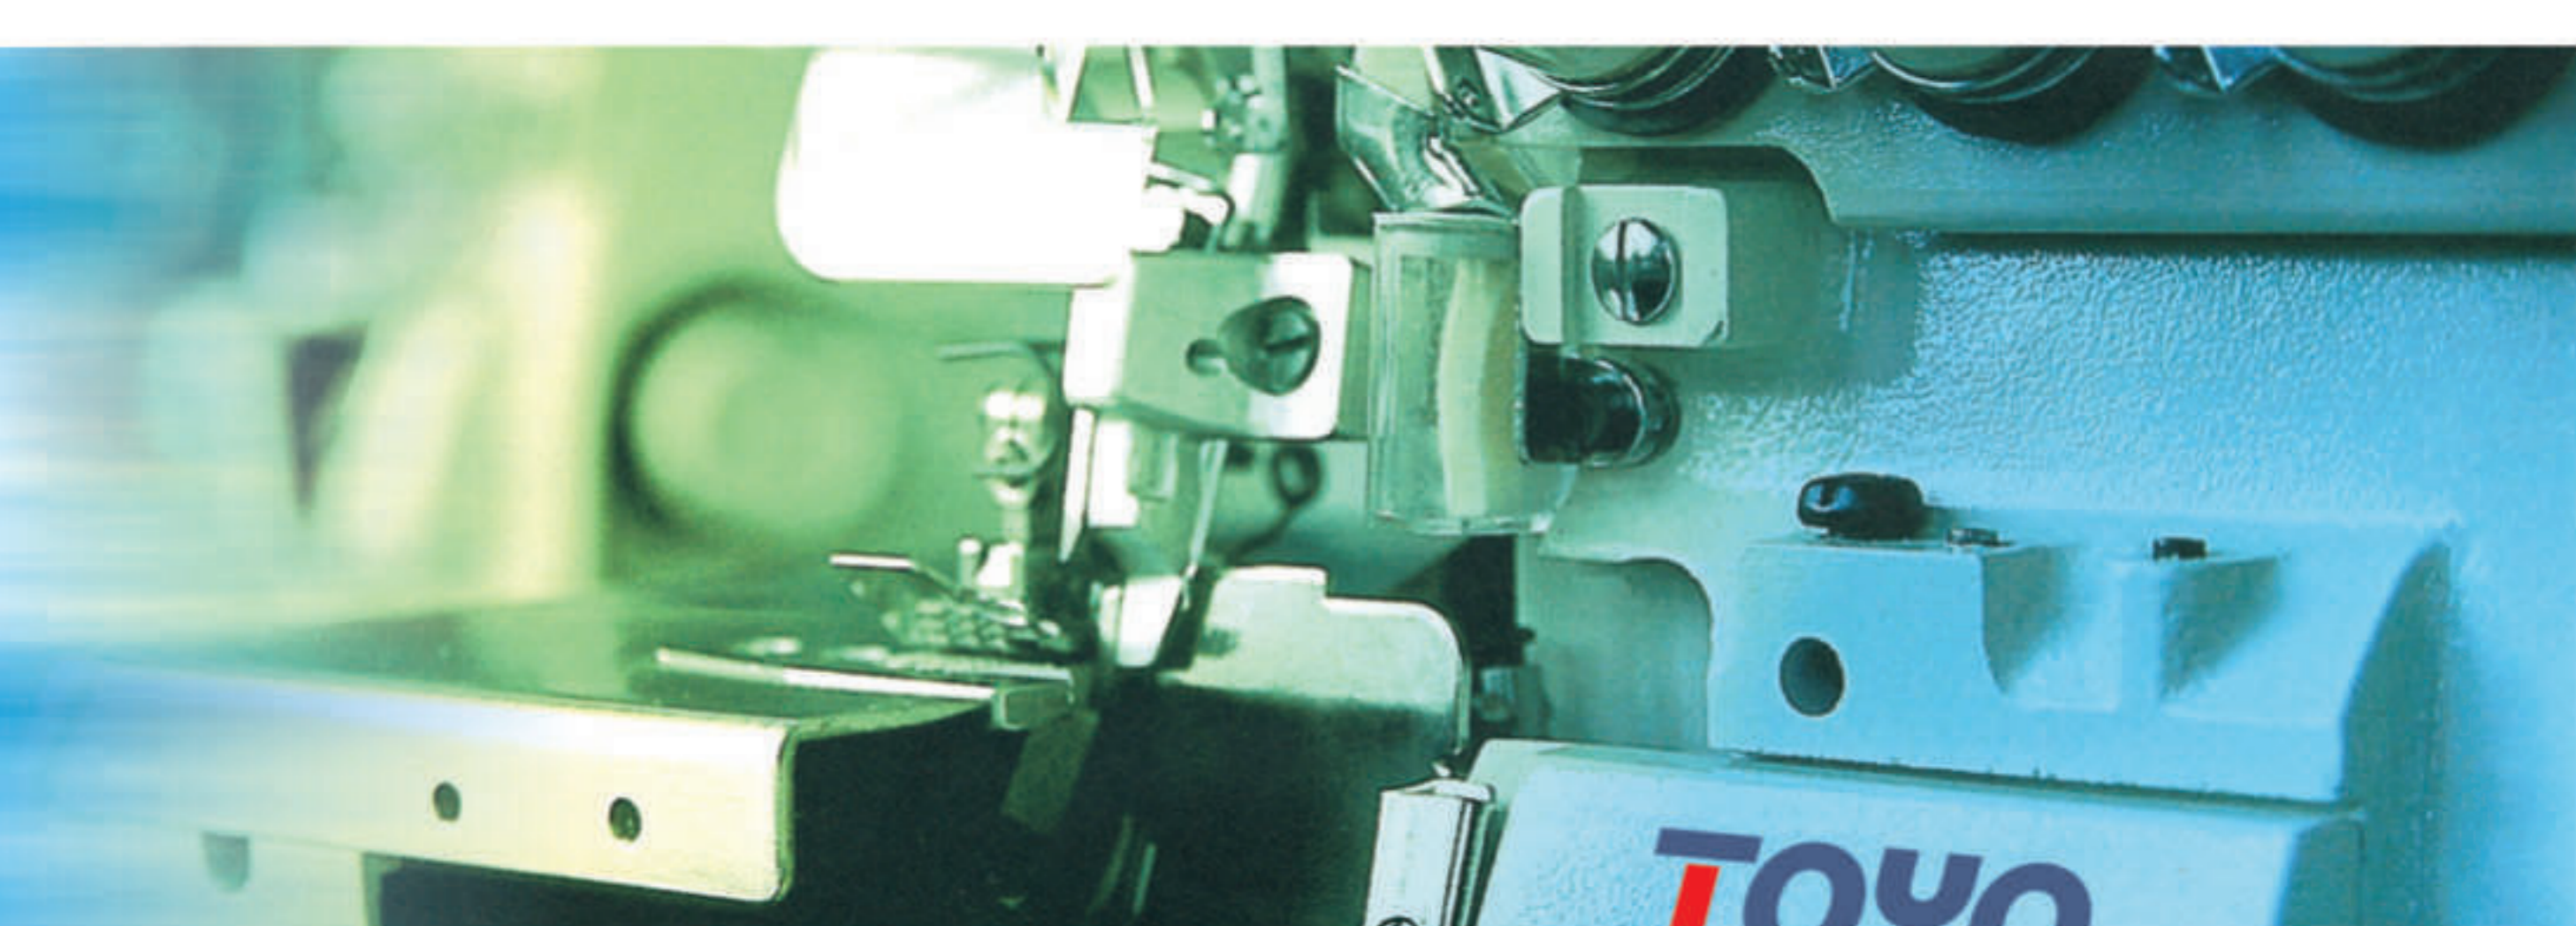

TY-8700D

HIGH SPEED SINGLE NEEDLE LOCKSTITCH FLATBED DIRECT DRIVE MACHINE WITH AUTOMATIC THREAD TRIMMER AND BACK TACKING



FEATURES

- Applied with the newly designed sewing mechanisms in order to achieve the low-tension sewing, the machine flexibly responds to various kinds of materials and produces beautiful seams of consistent quality. No matter in high-speed operation, the machine could obtain the best stitches.
- The best design technology created the optimum-balance and highly rigid machine could provide the operator with a comfortable work environment.
- The lift of the presser foot is 13mm, easy for in and out of the sewing products and easy operation, could increase working efficiency.
- Automatic lubricating system, smooth and quiet running, easy maintenance and increase the durability of the machine.
- By graduation dial, easy adjustment of stitch length can be obtained.
- Reverse feed by simple lever operation.
- These machines are ideally suited for stitching light to medium weight garments.

Model	Max.Sewing Speed	Needle System	Needle Bar Stroke	Stitch Length	Presser Foot Lift		Rotary Hook	Sewing Material	Packing Size L.W.H	GW/NW
					Hand	Knee				
TY-8700D	5500 s.p.m	DB x 1 #9 ~ #18	30.7 mm	5 mm	5.5 mm	13 mm	Standard	Light Medium	590 x 230 x 550	36/33 kg

Specifications subject to change without notice.






TY-8810

POSTBED SINGLE NEEDLE SEWING MACHINE




FEATURES

- Due to special unison feed, no wrinkle in light materials and the fine stitch in heavy material.
- Accurate and uniform setting of stitches and infinite stitch length variation.
- Maintenance-free ball and needle bearings and link take-up lever.
- Applied full-revolution vertical rotary hook with positive bobbin case opener.
- Equipped with easy-operating safety clutch which could protect the rotating hook from damage.
- Easy guiding of work when sewing on closed shoe uppers e.g. children's because the post is arranged to the right of the needle in TY-8810.
- In TY-8820 standard needle gauge : 1.6mm or 2.0mm or 2.4mm
- These machines are ideally suited for functional and ornamental seams preferably on concave portions of shoe uppers & leather products, etc.

Model	Max.Sewing Speed	Needle System	No. of Needle	Needle Bar Stroke	Stitch Length	Presser Foot Lift		Rotary Hook	Needle Feed	Wheel Feed	Packing Size L.W.H	GW/NW
						Hand	Knee					
TY-8810	2500 s.p.m	DP x 5	1	38 mm	7 mm	7 mm	15 mm		★	★	680 x 400 x 680	50/47

Specifications subject to change without notice.



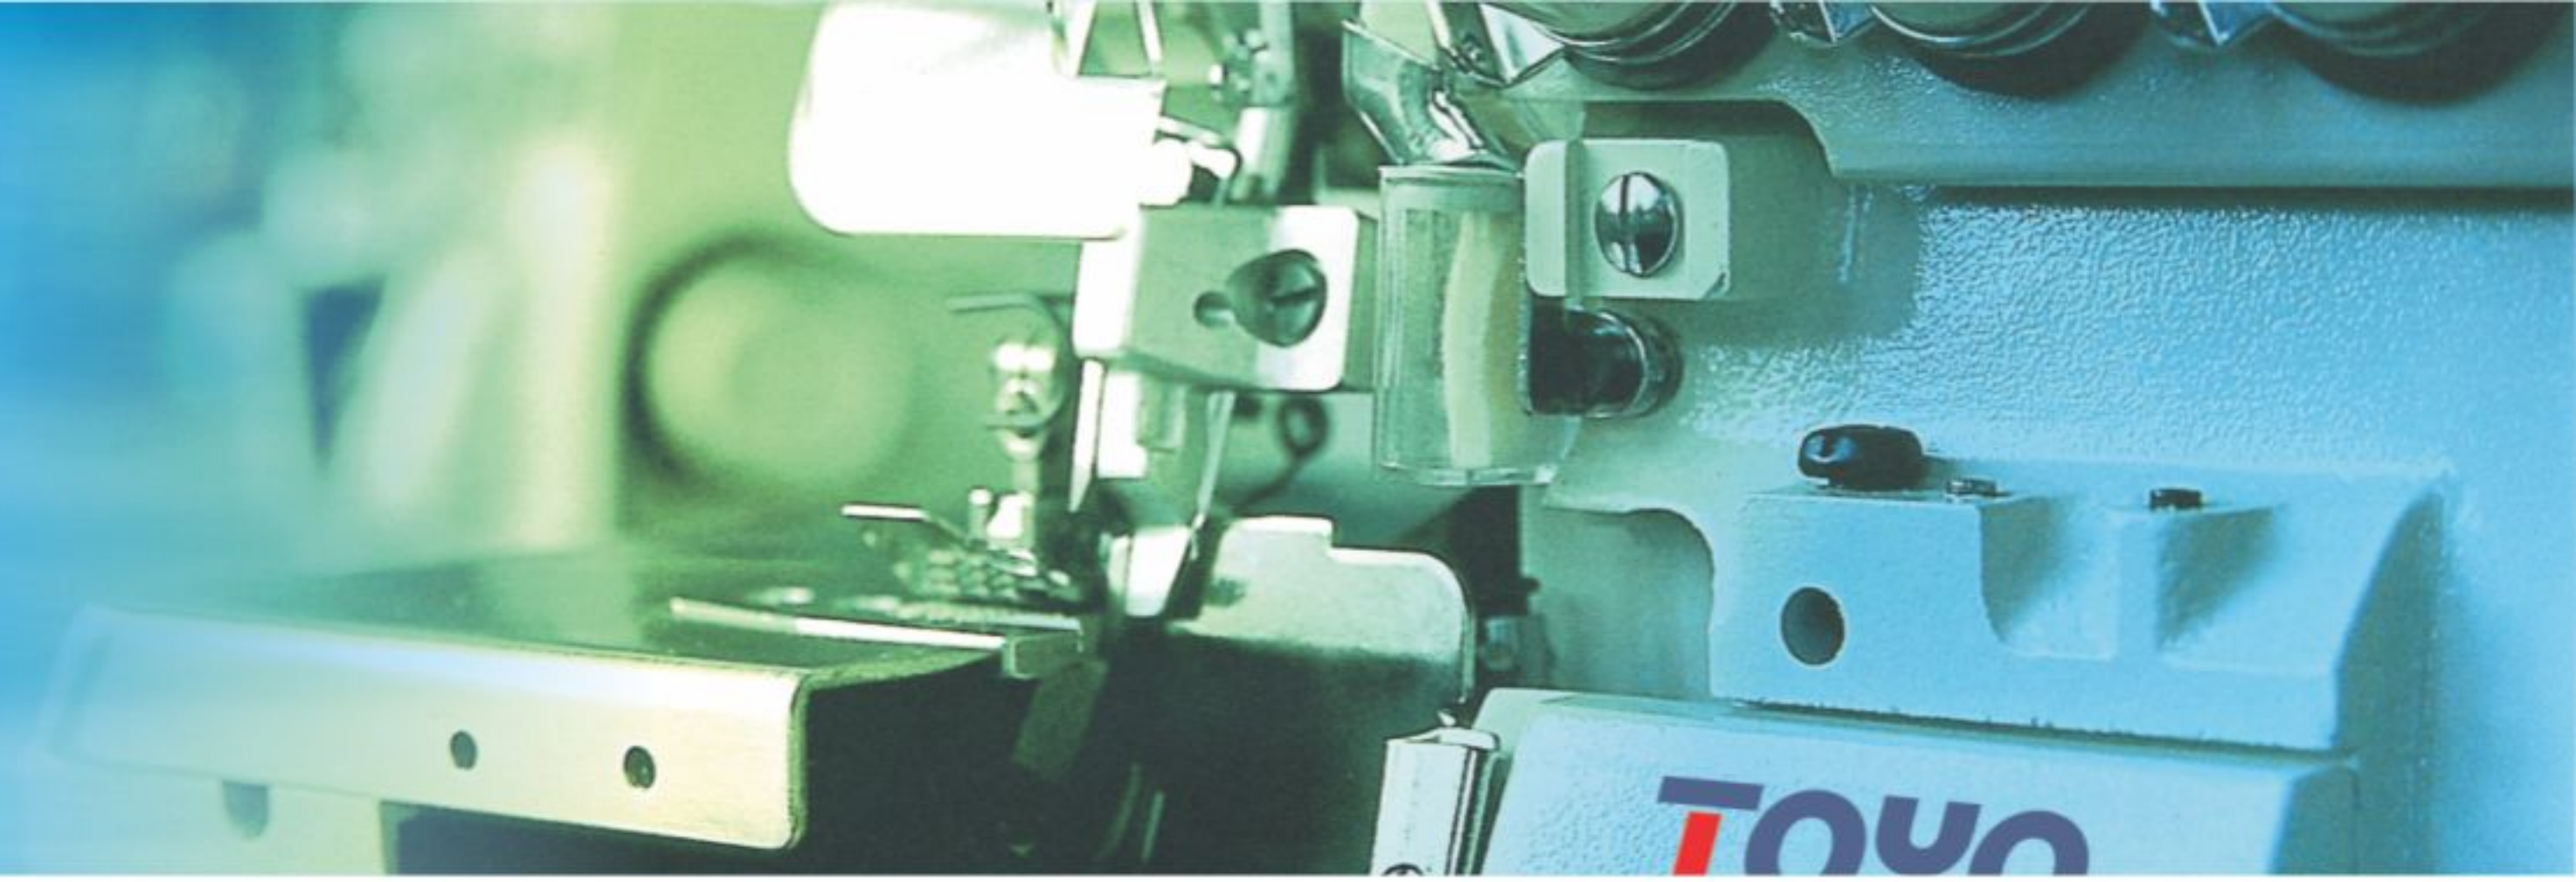


TY-8820

POSTBED DOUBLE NEEDLE SEWING MACHINE




FEATURES

- Due to special unison feed, no wrinkle in light materials and the fine stitch in heavy material.
- Accurate and uniform setting of stitches and infinite stitch length variation.
- Maintenance-free ball and needle bearings and link take-up lever.
- Applied full-revolution vertical rotary hook with positive bobbin case opener.
- Equipped with easy-operating safety clutch which could protect the rotating hook from damage.
- Easy guiding of work when sewing on closed shoe uppers e.g. children's because the post is arranged to the right of the needle in TY-8810.
- In TY-8820 standard needle gauge : 1.6mm or 2.0mm or 2.4mm
- These machines are ideally suited for functional and ornamental seams preferably on concave portions of shoe uppers & leather products, etc.

Model	Max.Sewing Speed	Needle System	No. of Needle	Needle Bar Stroke	Stitch Length	Presser Foot Lift		Rotary Hook	Needle Feed	Wheel Feed	Packing Size L.W.H	GW/NW
						Hand						
TY-8820	2500 s.p.m	DP x 5	2	38 mm	4 mm	7 mm	15 mm		★	★	680 x 400 x 680	50/47


Specifications subject to change without notice.



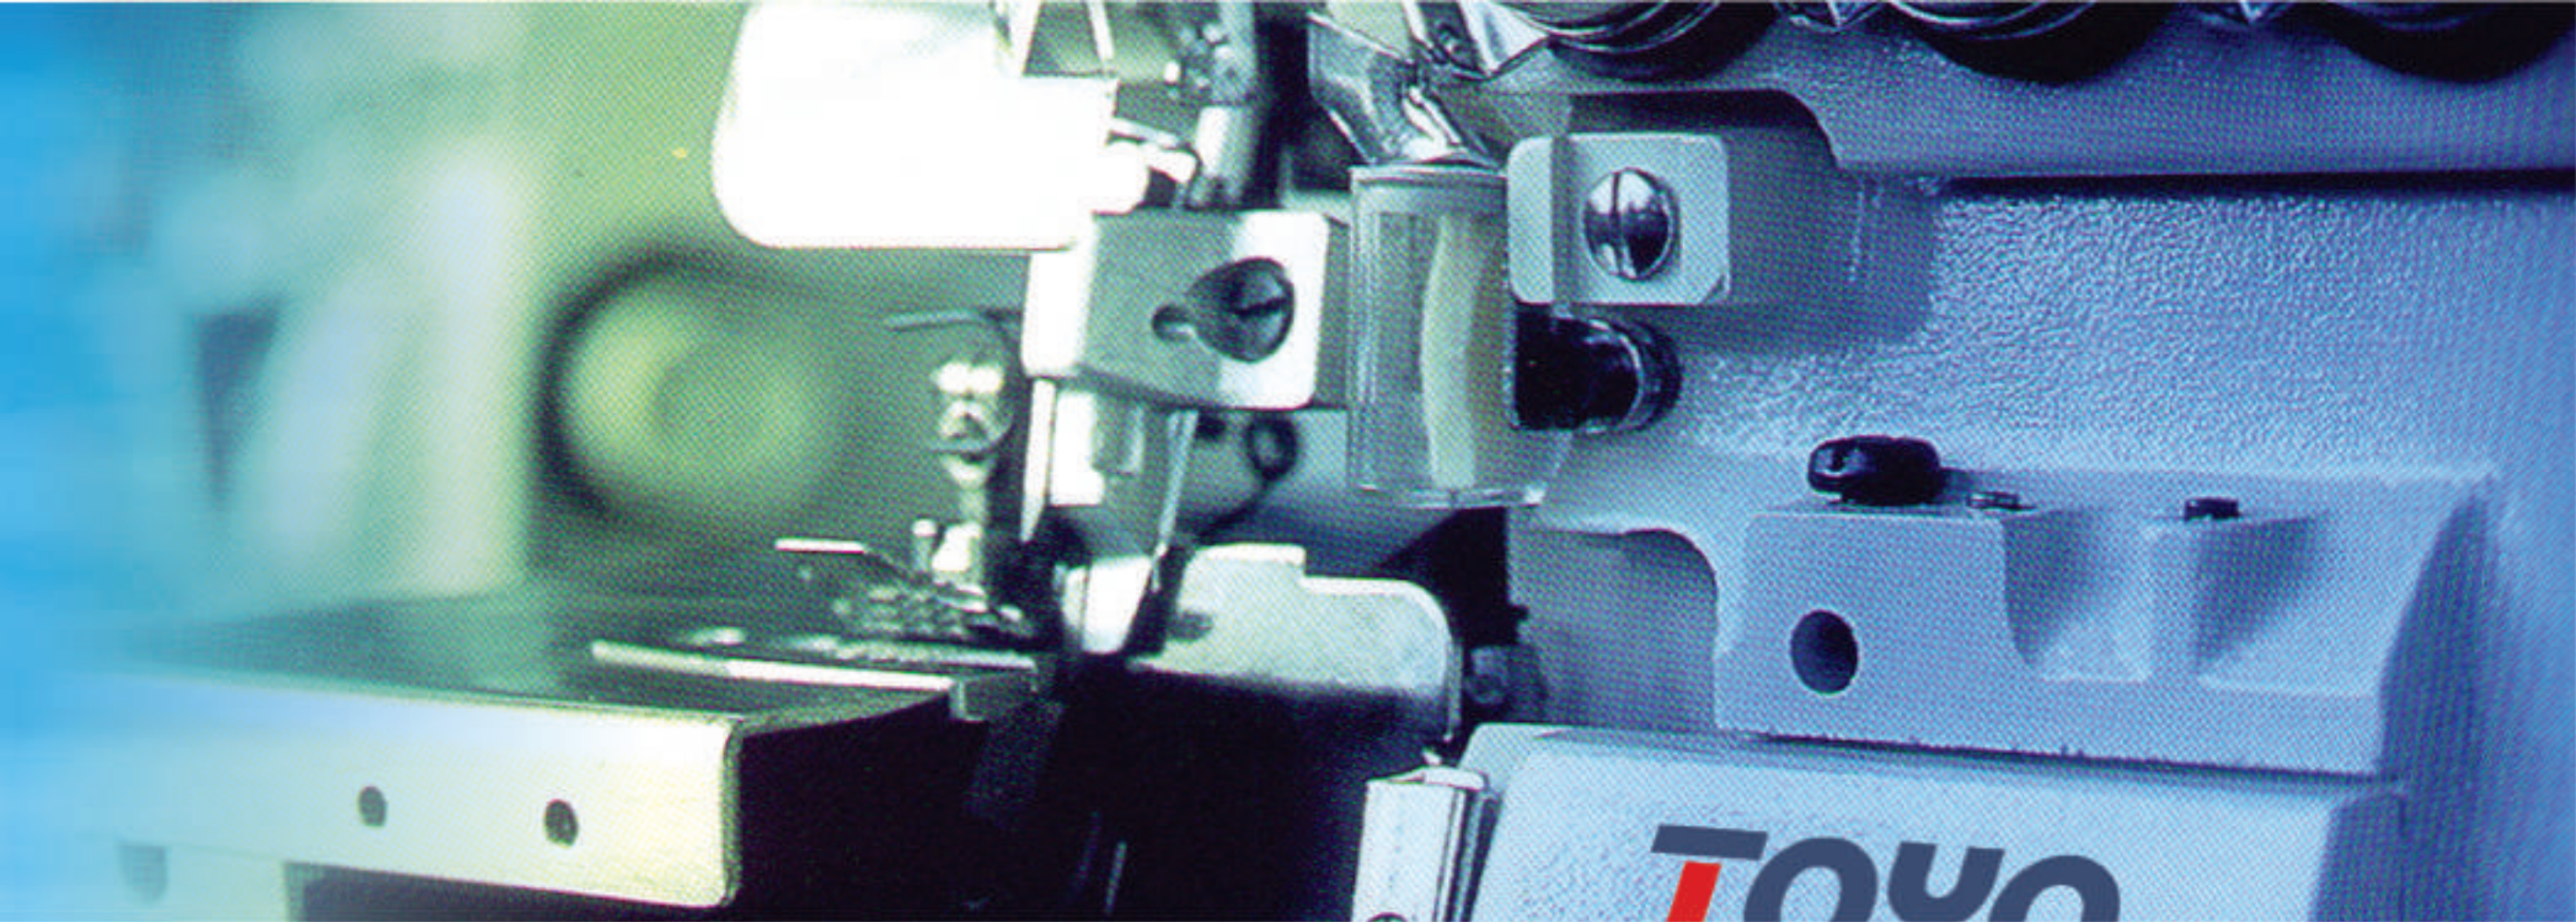

TY-9900D TY-9900D3

HIGH SPEED SINGLE NEEDLE LOCKSTITCH FLATBED DIRECT DRIVE MACHINE
HIGH SPEED SINGLE NEEDLE LOCKSTITCH FLATBED DIRECT DRIVE MACHINE
WITH AUTOMATIC THREAD TRIMMER

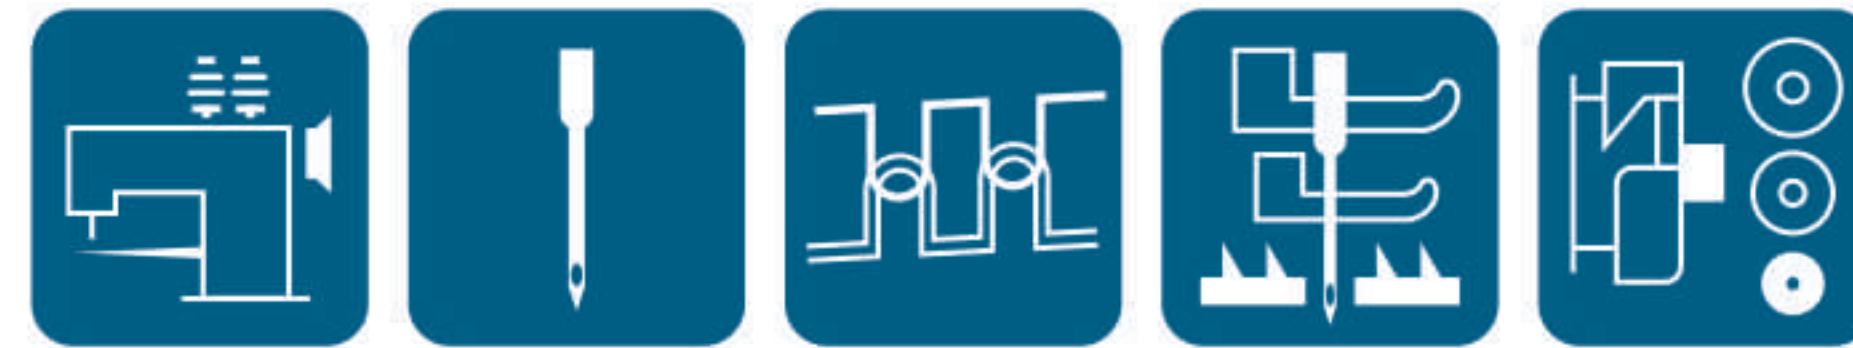

FEATURES

This machine is a new generation of smart computer lockstitch sewing machine adopting touch control panel. Sewing function can be easily set after entering panel by simple fingertip clicking. Touch panel is easy to be set, able to be operated directly with many simple picture guide for choosing.

With double round knives cutting mechanism, cutting can be made right below needle hole thus cutting thread head as short as 3mm effectively reducing workload for cutting after sewing. It can further expand sewing scope including denim, yarn and other materials less nest is for better quality, because of reducing workload of picking thread head.

Closed oil pan design structure can avoid oil pollution to sewing materials.

Specifications subject to change without notice.

